


September 2009

**FINAL USEPA
APPROVED REPORT**

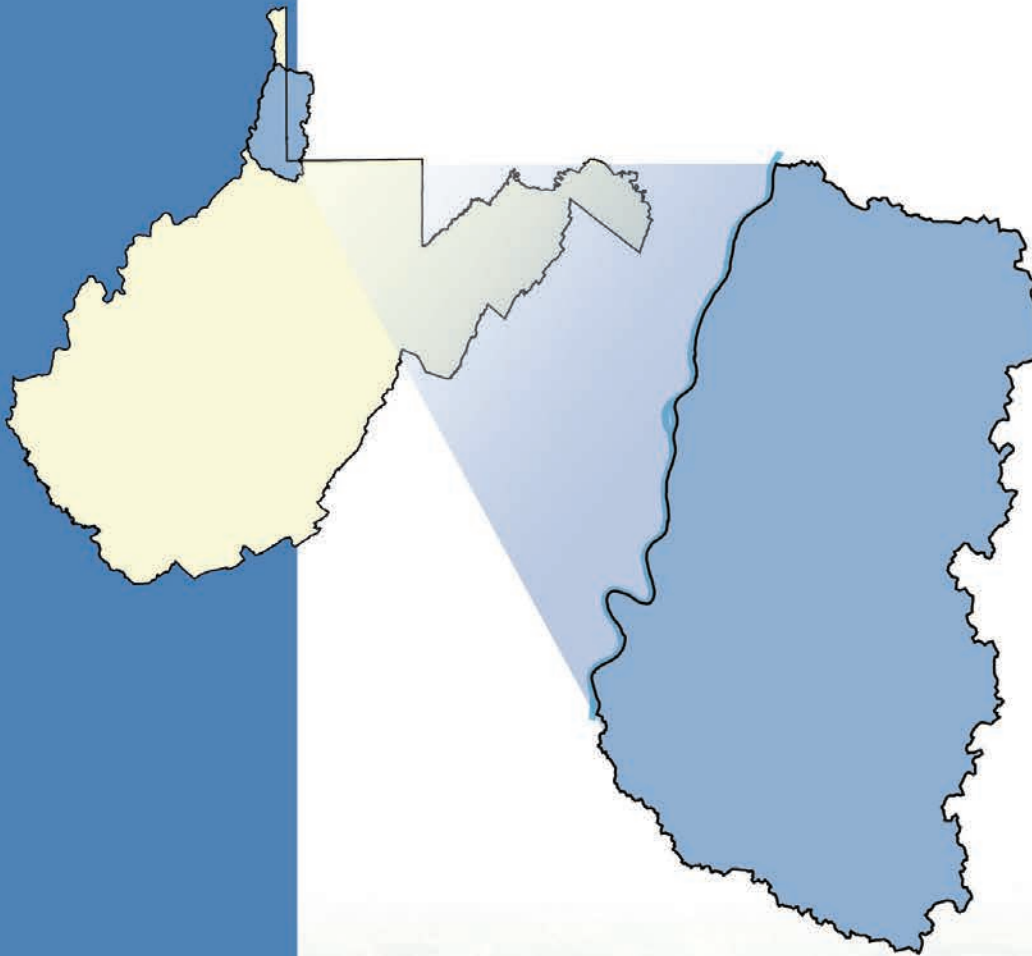

Total Maximum Daily Loads for Selected Streams in the Upper Ohio South River Watershed, West Virginia

Prepared for:

**West Virginia Department of Environmental Protection
Division of Water and Waste Management
Watershed Assessment Branch, TMDL Section**

Prepared by:

**Water Resources and TMDL Center
Tetra Tech
405 Capitol Street, Suite 608
Charleston, WV 25301**



Total Maximum Daily Loads for Selected Streams in the Upper Ohio South Watershed, West Virginia

FINAL APPROVED REPORT

September 2009

CONTENTS

Acronyms, Abbreviations, and Definitions	vi
Executive Summary	ix
1.0 Report Format	1
2.0 Introduction	1
2.1 Total Maximum Daily Loads.....	1
2.2 Water Quality Standards.....	4
3.0 Watershed Description and Data Inventory	5
3.1 Watershed Description.....	5
3.2 Data Inventory	7
3.3 Impaired Waterbodies.....	9
4.0 Biological Impairment and Stressor Identification	13
4.1 Introduction.....	13
4.2 Data Review.....	13
4.3 Candidate Causes/Pathways.....	14
4.4 Stressor Identification Results	16
5.0 Metals Source Assessment	21
5.1 Metals Point Sources.....	21
5.1.1 Mining Point Sources.....	23
5.1.2 Non-mining Point Sources.....	24
5.1.3 Construction Stormwater Permits	24
5.1.4 Municipal Separate Storm Sewer Systems (MS4).....	26
5.2 Metals Nonpoint Sources	28
5.2.1 Abandoned Mine Lands.....	28
5.2.2 SMCRA Bond Forfeiture Sites	28
5.2.3 Sediment Sources.....	30
6.0 pH Sources	31
7.0 Chloride Sources	32
8.0 Fecal Coliform Source Assessment	34
8.1 Fecal Coliform Point Sources	34
8.1.1 Individual NPDES Permits	34
8.1.2 Overflows.....	34

8.1.3	Municipal Separate Storm Sewer Systems (MS4)	34
8.1.4	General Sewage Permits	35
8.2	Fecal Coliform Nonpoint Sources	35
8.2.1	On-site Treatment Systems	35
8.2.2	Urban/Residential Runoff	37
8.2.3	Agriculture	37
8.2.4	Natural Background (Wildlife)	37
9.0	Sediment Source Assessment	38
10.0	Modeling Process	38
10.1	Model Selection	38
10.2	Model Setup	40
10.2.1	General MDAS Configuration	40
10.2.2	Iron and Sediment Configuration	42
10.2.3	Aluminum, Manganese and pH Configuration	43
10.2.4	Chloride Configuration	44
10.2.5	Fecal Coliform Configuration	44
10.3	Hydrology Calibration	44
10.4	Water Quality Calibration	45
10.5	Modeling Technique for Biological Impairments with Sedimentation Stressors	46
10.6	Allocation Strategy	47
10.6.1	TMDL Endpoints	48
10.6.2	Baseline Conditions and Source Loading Alternatives	49
10.7	TMDLs and Source Allocations	52
10.7.1	Total Iron TMDLs	52
10.7.2	Dissolved Aluminum and pH TMDLs	54
10.7.3	Total Manganese TMDL	55
10.7.4	Fecal Coliform Bacteria TMDLs	55
10.7.5	Chloride TMDLs	59
10.7.6	Seasonal Variation	59
10.7.7	Critical Conditions	59
10.7.8	TMDL Presentation	60
11.0	TMDL Results	61
12.0	Future Growth	69
12.1	Iron, Aluminum and Manganese	69
12.2	Fecal Coliform Bacteria	70
12.3	Chloride	70
13.0	Public Participation	71

13.1	Public Meetings	71
13.2	Public Notice and Public Comment Period	71
13.3	Response Summary.....	71
14.0	Reasonable Assurance	73
14.1	NPDES Permitting.....	74
14.2	Watershed Management Framework Process.....	75
14.3	Public Sewer Projects	76
14.4	AML Projects.....	76
15.0	Monitoring Plan	77
15.1	NPDES Compliance.....	77
15.2	Nonpoint Source Project Monitoring.....	77
15.3	TMDL Effectiveness Monitoring	77
16.0	References.....	78

FIGURES

Figure I-1.	Examples of a watershed, TMDL watershed, and subwatersheds.....	viii
Figure 2-1.	Hydrologic groupings of West Virginia’s watersheds	3
Figure 3-1.	Location of the Upper Ohio South watershed in West Virginia	6
Figure 3-2.	14 Upper Ohio South TMDL watersheds	10
Figure 4-1.	Conceptual model of candidate causes and potential biological effects	15
Figure 4-2.	Location of the sediment reference stream, Britt Run (WV-OUS-17-M).....	20
Figure 5-1.	Metals point sources in the Upper Ohio South watershed	22
Figure 5-2.	Construction stormwater permits in the Upper Ohio South watershed.....	25
Figure 5-3.	MS4 jurisdictions in the Upper Ohio South watershed.....	27
Figure 5-4.	Metals non-point sources in the Upper Ohio South watershed.....	29
Figure 7-1.	Chloride point sources in the Upper Ohio South watershed	33
Figure 8-1.	Failing septic flows in the Upper Ohio South watershed.....	36

Figure 10-1. 14 TMDL watersheds and subwatershed delineation 41

Figure 10-2. Shrewsbury Hollow fecal coliform observed data 46

Figure 10-4. Annual precipitation totals for the Washington 3 NE (PA 9318) weather station.. 50

Figure 10-5. Example of baseline and TMDL conditions for total iron 51

TABLES

Table 2-1. Applicable West Virginia water quality criteria 5

Table 3-1. Modified landuse for the Upper Ohio South TMDL watersheds 7

Table 3-2. Datasets used in TMDL development 8

Table 3-3. Waterbodies and impairments for which TMDLs have been developed..... 11

Table 4-1. Significant stressors of biologically impaired streams in the Upper Ohio South watershed 18

Table 10-1. Sediment loadings using different modeling approaches 47

Table 10-2. TMDL endpoints..... 48

Table 10-3. Concentrations used in representing permitted conditions for active mining 50

Table 10-4. Combined sewer overflows in the Upper Ohio South watershed..... 56

Table 11-1. Dissolved Aluminum TMDLs 61

Table 11-2. Iron TMDLs 61

Table 11-3. Manganese TMDLs 62

Table 11-4. Chloride TMDLs..... 63

Table 11-5. pH TMDLs..... 63

Table 11-6. Fecal coliform bacteria TMDLs 64

Table 11-7. Biological TMDLs..... 66

ACRONYMS, ABBREVIATIONS, AND DEFINITIONS

7Q10	7-day, 10-year low flow
AD	Acid Deposition
AMD	acid mine drainage
AML	abandoned mine land
AML&R	[WVDEP] Office of Abandoned Mine Lands & Reclamation
BMP	best management practice
BOD	biochemical oxygen demand
BPH	[West Virginia] Bureau for Public Health
CFR	Code of Federal Regulations
CSO	combined sewer overflow
CSR	Code of State Rules
DEM	Digital Elevation Model
DMR	[WVDEP] Division of Mining and Reclamation
DNR	West Virginia Division of Natural Resources
DO	dissolved oxygen
DWWM	[WVDEP] Division of Water and Waste Management
ERIS	Environmental Resources Information System
GIS	geographic information system
gpd	gallons per day
GPS	global positioning system
HAU	home aeration unit
LA	load allocation
µg/L	micrograms per liter
MDAS	Mining Data Analysis System
mg/L	milligrams per liter
mL	milliliter
MF	membrane filter counts per test
MPN	most probable number
MOS	margin of safety
MRLC	Multi-Resolution Land Characteristics Consortium
MS4	Municipal Separate Storm Sewer System
NED	National Elevation Dataset
NLCD	National Land Cover Dataset
NOAA-NCDC	National Oceanic and Atmospheric Administration, National Climatic Data Center
NPDES	National Pollutant Discharge Elimination System
NRCS	Natural Resources Conservation Service
OOG	[WVDEP] Office of Oil and Gas
POTW	publicly owned treatment works
SI	stressor identification
SMCRA	Surface Mining Control and Reclamation Act

SRF	State Revolving Fund
SSO	sanitary sewer overflow
STATSGO	State Soil Geographic database
TMDL	Total Maximum Daily Load
TSS	total suspended solids
USDA	U.S. Department of Agriculture
USEPA	U.S. Environmental Protection Agency
USGS	U.S. Geological Survey
UNT	unnamed tributary
WLA	wasteload allocation
WVDEP	West Virginia Department of Environmental Protection
WVDOH	West Virginia Division of Highways
WVSCI	West Virginia Stream Condition Index
WVU	West Virginia University

Watershed

A general term used to describe a drainage area within the boundary of a United States Geologic Survey's 8-digit hydrologic unit code. In West Virginia, the Ohio River and drainage area from Wellsburg, WV downstream to Woodlands, WV is referred to as the Upper Ohio South watershed. Throughout this report, the Upper Ohio South watershed refers to the eastern tributary streams located in West Virginia and Pennsylvania that eventually drain to the Ohio River (Figure I-1). The term "watershed" is also used more generally to refer to the land area that contributes precipitation runoff that eventually drains to the Ohio River.

TMDL Watershed

This term is used to describe the total land area draining to an impaired stream for which a TMDL is being developed. This term also takes into account the land area drained by unimpaired tributaries of the impaired stream, and may include impaired tributaries for which additional TMDLs are presented. This report addresses 75 impaired streams contained within 14 TMDL watersheds in the Upper Ohio South watershed.

Subwatershed

The subwatershed delineation is the most detailed scale of the delineation that breaks each TMDL watershed into numerous catchments for modeling purposes. The 14 TMDL watersheds have been subdivided into 282 modeled subwatersheds. Pollutant sources, allocations and reductions are presented at the subwatershed scale to facilitate future permitting actions and TMDL implementation.

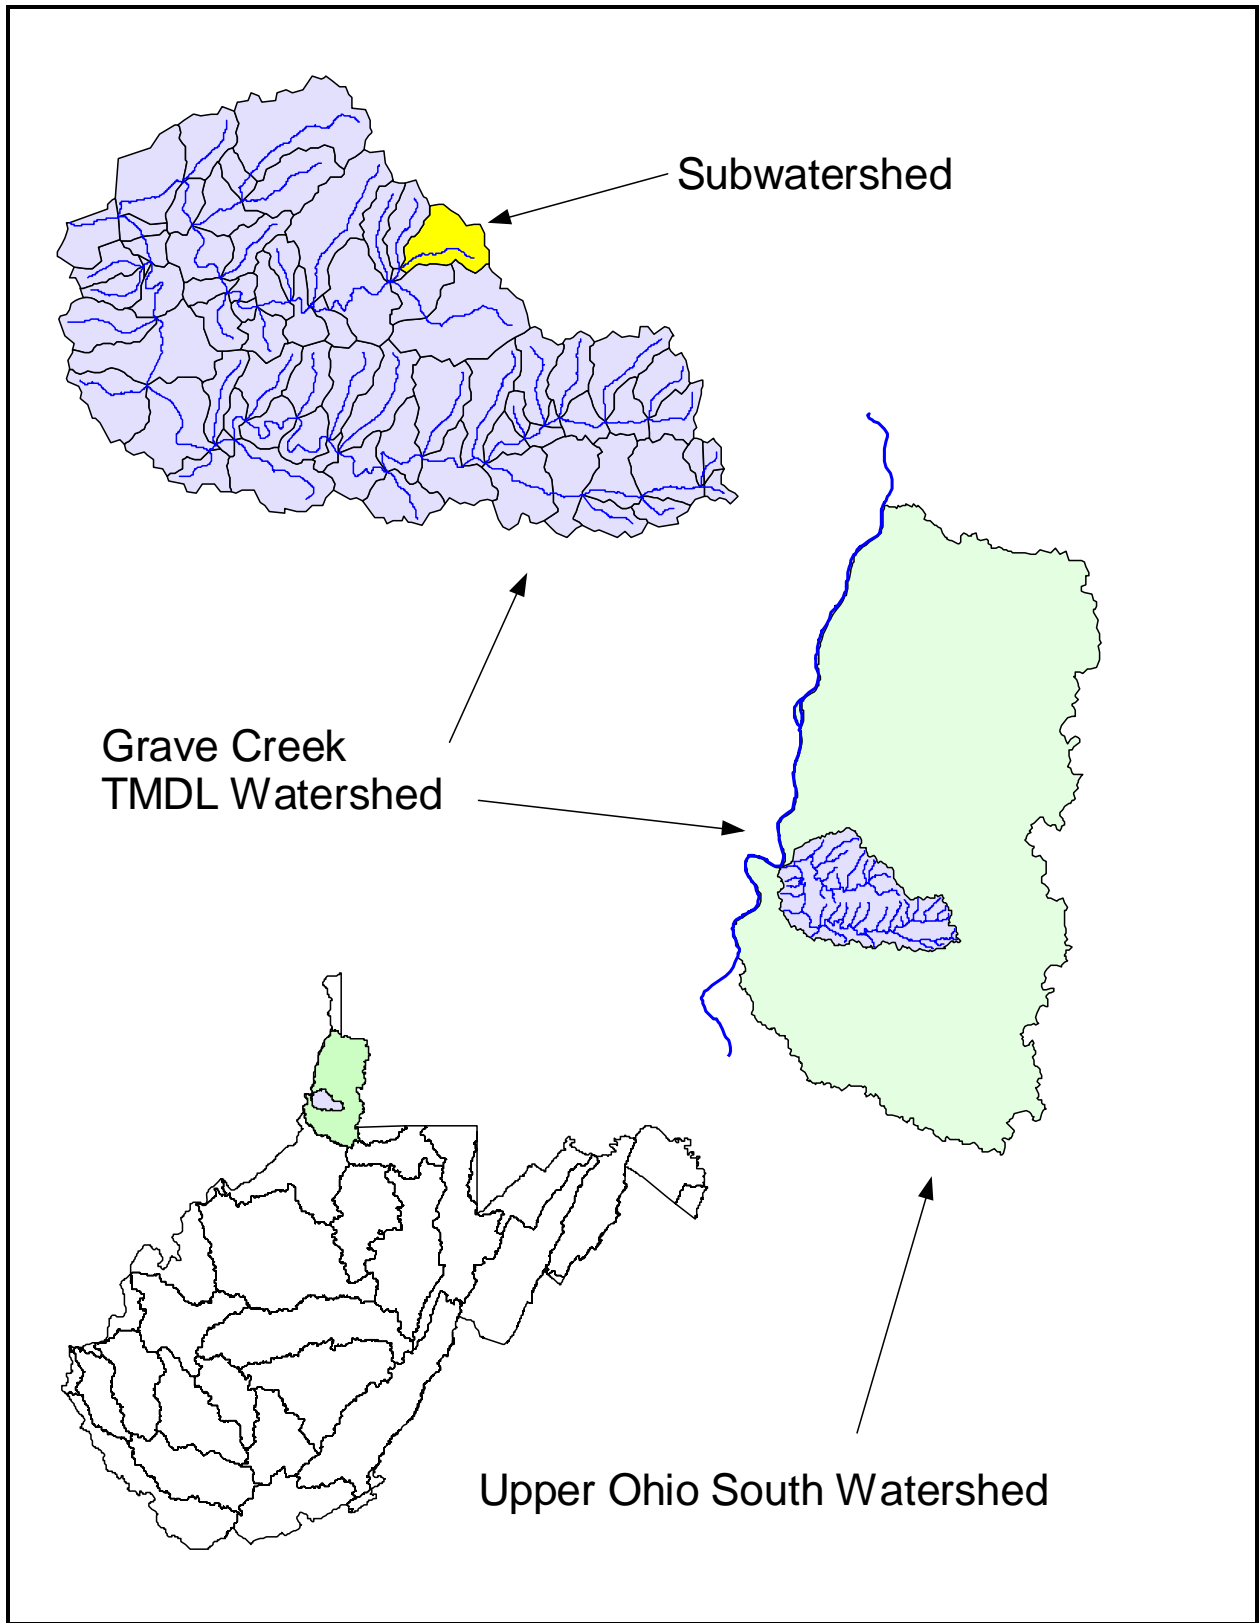


Figure I-1. Examples of a watershed, TMDL watershed, and subwatersheds

EXECUTIVE SUMMARY

This report includes Total Maximum Daily Loads (TMDLs) for 75 impaired streams in the Upper Ohio South watershed located in the northern panhandle of West Virginia.

A TMDL establishes the maximum allowable pollutant loading for a waterbody to comply with water quality standards, distributes the load among pollutant sources, and provides a basis for actions needed to restore water quality. West Virginia's water quality standards are codified at Title 47 of the *Code of State Rules* (CSR), Series 2, and titled *Legislative Rules, Department of Environmental Protection: Requirements Governing Water Quality Standards*. The standards include designated uses of West Virginia waters and numeric and narrative criteria to protect those uses. The West Virginia Department of Environmental Protection routinely assesses use support by comparing observed water quality data with criteria and reports impaired waters every two years as required by Section 303(d) of the Clean Water Act ("303(d) list"). The Act requires that TMDLs be developed for listed impaired waters.

The majority of the subject impaired streams are included on West Virginia's Draft 2008 Section 303(d) List. Documented impairments are related to numeric water quality criteria for total iron, total manganese, dissolved aluminum, pH, chloride, and fecal coliform bacteria. Certain waters are also biologically impaired based on the narrative water quality criterion of 47 CSR 2-3.2.i, which prohibits the presence of wastes in state waters that cause or contribute to significant adverse impacts on the chemical, physical, hydrologic, and biological components of aquatic ecosystems.

From 1997 through September 2003, the U.S. Environmental Protection Agency (USEPA), Region 3, developed West Virginia TMDLs under the settlement of a 1995 lawsuit, Ohio Valley Environmental Coalition, Inc., West Virginia Highlands et al. v. Browner et al. The lawsuit resulted in a consent decree between the plaintiffs and USEPA. The consent decree established a rigorous schedule for TMDL development and required TMDLs for the impaired waters on West Virginia's 1996 Section 303(d) list. The schedule has been recently modified to extend TMDL development dates to September 2009.

Since October 2003, West Virginia's TMDLs have been developed by WVDEP. This report accommodates the timely development of the remaining Upper Ohio South watershed TMDLs required by the consent decree (mine drainage impairments of Wells Run, Long Run, Waddles Run, Pogue Run, Britt Run, and Hollidays Hollow) and also presents TMDLs for additional impairments of those streams.

Impaired waters were organized into 14 TMDL watersheds. For hydrologic modeling purposes, impaired and unimpaired streams in these 14 TMDL watersheds were further divided into 282 smaller subwatershed units for modeling. The subwatershed delineation provided a basis for georeferencing pertinent source information, monitoring data, and presentation of the TMDLs.

The Mining Data Analysis System (MDAS) was used to represent linkage between pollutant sources and instream responses for fecal coliform bacteria, iron, manganese, aluminum, and chloride. The MDAS is a comprehensive data management and modeling system that is capable of representing loads from nonpoint and point sources in the watershed and simulating instream processes.

Portions of the Wheeling Creek, Grave Creek and Castelman Run TMDL watersheds are located in Pennsylvania. The TMDLs do not prescribe specific load and wasteload allocations for contributing drainage areas in Pennsylvania. Instead, they assign a gross load expressed as a load allocation by model subwatershed, thereby allowing Pennsylvania the flexibility to determine appropriate and necessary point and nonpoint source reductions.

Point and nonpoint sources contribute to the fecal coliform bacteria impairments in the watershed. Failing on-site systems, direct discharges of untreated sewage, and precipitation runoff from agricultural and residential areas are significant nonpoint sources of fecal coliform bacteria. Point sources of fecal coliform bacteria include the effluents of sewage treatment facilities and collection system overflows from publicly owned treatment works (POTWs) and stormwater discharges from Municipal Separate Storm Sewer Systems (MS4s).

Iron impairments are also attributable to both point and nonpoint sources. Nonpoint sources of iron include abandoned mine lands (AML), roads, oil and gas operations, timbering, agriculture, urban/residential land disturbance and streambank erosion. Iron point sources include the permitted discharges from mining activities, and stormwater contributions from Municipal Separate Storm Sewer Systems (MS4), construction sites and non-mining industrial facilities. The presence of individual source categories and their relative significance varies by subwatershed. Because iron is a naturally-occurring element that is present in soils, the iron loading from many of the identified sources is associated with sediment contributions.

The pH, manganese and dissolved aluminum impairments of Glens Run have been attributed solely to abandoned mine land (AML) sources. The TMDL for the pH impairment was developed using a surrogate approach where the reductions of iron and aluminum concentrations allow for attainment of the pH water quality criterion.

Chloride impairments in the watershed are caused by certain point source discharges associated with mining activities.

Biological integrity/impairment is based on a rating of the stream's benthic macroinvertebrate community using the multimetric West Virginia Stream Condition Index (WVSCI). The first step in TMDL development for biologically impaired waters is stressor identification (SI). Section 4 discusses the SI process. SI was followed by stream-specific determinations of the pollutants for which TMDLs must be developed. Metals and pH toxicity, organic enrichment, sedimentation, and ionic toxicity were identified as causative stressors for the biologically impaired streams addressed in this effort.

The biological impairment of Glens Run was attributed to toxicity from low pH and elevated dissolved metals and it was determined that the implementation of those pollutant-specific TMDLs would address the biological impairment.

Organic enrichment was identified as a significant biological stressor in many waters. All such waters also demonstrated violations of the numeric criteria for fecal coliform bacteria. It was determined that implementation of fecal coliform TMDLs would removed untreated sewage and significantly reduce animal wastes, thereby reducing the organic and nutrient loading causing the biological impairment.

Where sedimentation was identified as a significant stressor, sediment TMDLs were initially developed within the MDAS using a reference watershed approach. The MDAS was configured to examine upland sediment loading and streambank erosion and depositional processes. Load reductions for sediment-impaired waters were projected based upon the sediment loading present in an unimpaired reference watershed. For all of those waters, a strong, positive correlation between iron and total suspended solids (TSS) was identified and iron TMDLs are presented. It was universally determined that the sediment reductions necessary for the attainment of iron water quality criteria exceed those necessary to address biological stress from sedimentation. As such, the iron TMDLs serve as surrogates for the biological impairments caused by sedimentation.

The causative pollutants and impairment thresholds associated with ionic toxicity are not well understood. In certain waters, chlorides water quality criteria are not attained and chlorides TMDLs are presented. Although the reduction of chlorides concentrations should positively impact stream biology, it could not be determined that the attainment of chlorides water quality criteria alone would resolve the biological impairments. A strong presence of sulfates and other dissolved solids exists in those waters and in all other streams where ionic toxicity has been determined to be a significant biological stressor. Because available information is insufficient to address biological impairment attributed to ionic toxicity, TMDLs have not been presented for their biological impairments and those impairments will be retained on the Section 303(d) List.

This report describes the TMDL development and modeling processes, identifies impaired streams and existing pollutant sources, discusses future growth and TMDL achievability, and documents the public participation associated with the process. It also contains a detailed discussion of the allocation methodologies applied for various impairments. Various provisions attempt to ensure the attainment of criteria throughout the watershed, achieve equity among categories of sources, and target pollutant reductions from the most problematic sources. Nonpoint source reductions were not specified beyond natural (background) levels. Similarly, point source wasteload allocations (WLAs) were no more stringent than numeric water quality criteria.

Applicable TMDLs are displayed in Section 9 of this report. Accompanying spreadsheets provide TMDLs and allocations of loads to categories of point and nonpoint sources that achieve the total TMDL. Also provided is an interactive ArcExplorer geographic information system (GIS) project that allows for the exploration of spatial relationships among the source assessment data. A Technical Report is also available that describes the detailed technical approaches used in the process and displays data upon which the TMDLs are based.

Considerable resources were used to acquire recent water quality and pollutant source information upon which the TMDLs are based. The TMDL modeling is among the most sophisticated available, and incorporates sound scientific principles. TMDL outputs are presented in various formats to assist user comprehension and facilitate use in implementation.

1.0 REPORT FORMAT

This report describes the overall total maximum daily load (TMDL) development process for the Upper Ohio South watershed, identifies impaired streams, and outlines the source assessment for all pollutants for which TMDLs are presented. It also describes the modeling and allocation processes and lists measures that will be taken to ensure that the TMDLs are met. The applicable TMDLs are displayed in Section 9 of this report. The report is supported by a compact disc containing an interactive ArcExplorer GIS project that provides further details on the data and allows the user to explore the spatial relationships among the source assessment data. With this tool, users can magnify streams and other features of interest. Also included on the CD are spreadsheets (in Microsoft Excel format) that provide detailed source allocations associated with successful TMDL scenarios. A Technical Report is also included that describes the detailed technical approaches used in the process and displays data upon which the TMDLs are based.

2.0 INTRODUCTION

The West Virginia Department of Environmental Protection (WVDEP), Division of Water and Waste Management (DWWM), is responsible for the protection, restoration, and enhancement of the state's waters. Along with this duty comes the responsibility for TMDL development in West Virginia.

2.1 Total Maximum Daily Loads

Section 303(d) of the federal Clean Water Act and the U.S. Environmental Protection Agency's (USEPA) Water Quality Planning and Management Regulations (at Title 40 of the *Code of Federal Regulations* [CFR] Part 130) require states to identify waterbodies that do not meet water quality standards and to develop appropriate TMDLs. A TMDL establishes the maximum allowable pollutant loading for a waterbody to achieve compliance with applicable standards. It also distributes the load among pollutant sources and provides a basis for the actions needed to restore water quality.

A TMDL is composed of the sum of individual wasteload allocations (WLAs) for point sources and load allocations (LAs) for nonpoint sources and natural background levels. In addition, the TMDL must include a margin of safety (MOS), implicitly or explicitly, that accounts for the uncertainty in the relationship between pollutant loads and the quality of the receiving waterbody. TMDLs can be expressed in terms of mass per time or other appropriate units. Conceptually, this definition is denoted by the following equation:

$$\text{TMDL} = \text{sum of WLAs} + \text{sum of LAs} + \text{MOS}$$

From 1997 through September 2003, the U.S. Environmental Protection Agency (USEPA), Region 3, developed West Virginia TMDLs under the settlement of a 1995 lawsuit, Ohio Valley Environmental Coalition, Inc., West Virginia Highlands et al. v. Browner et al. The lawsuit resulted in a consent decree between the plaintiffs and USEPA. The consent decree established a

rigorous schedule for TMDL development and required TMDLs for the impaired waters on West Virginia's 1996 Section 303(d) list. The schedule has been recently modified to extend TMDL development dates to September 2009.

Since October 2003, West Virginia's TMDLs have been developed by WVDEP. This report accommodates the timely development of the remaining Upper Ohio South watershed TMDLs required by the consent decree (mine drainage impairments of Wells Run, Long Run, Waddles Run, Pogue Run, Britt Run, and Hollidays Hollow) and also presents TMDLs for additional impairments of those streams.

WVDEP is developing TMDLs in concert with a geographically-based approach to water resource management in West Virginia—the Watershed Management Framework. Adherence to the Framework ensures efficient and systematic TMDL development. Each year, TMDLs are developed in specific geographic areas. The Framework dictates that in 2008 TMDLs should be pursued in Hydrologic Group E, which includes the Upper Ohio South watershed. Figure 2-1 depicts the hydrologic groupings of West Virginia's watersheds; the legend includes the target year for finalization of each TMDL.

WVDEP is committed to implementing a TMDL process that reflects the requirements of the TMDL regulations, provides for the achievement of water quality standards, and ensures that ample stakeholder participation is achieved in the development and implementation of TMDLs. A 48-month development process enables the agency to carry out an extensive data generating and gathering effort to produce scientifically defensible TMDLs. It also allows ample time for modeling, report finalization, and frequent public participation opportunities.

The TMDL development process begins with pre-TMDL water quality monitoring and source identification and characterization. Informational public meetings are held in the affected watersheds. Data obtained from pre-TMDL efforts are compiled, and the impaired waters are modeled to determine baseline conditions and the gross pollutant reductions needed to achieve water quality standards. WVDEP then presents its allocation strategies in a second public meeting, after which final TMDL reports are developed. The draft TMDL is advertised for public review and comment, and a third informational meeting is held during the public comment period. Public comments are addressed, and the draft TMDL is submitted to USEPA for approval.

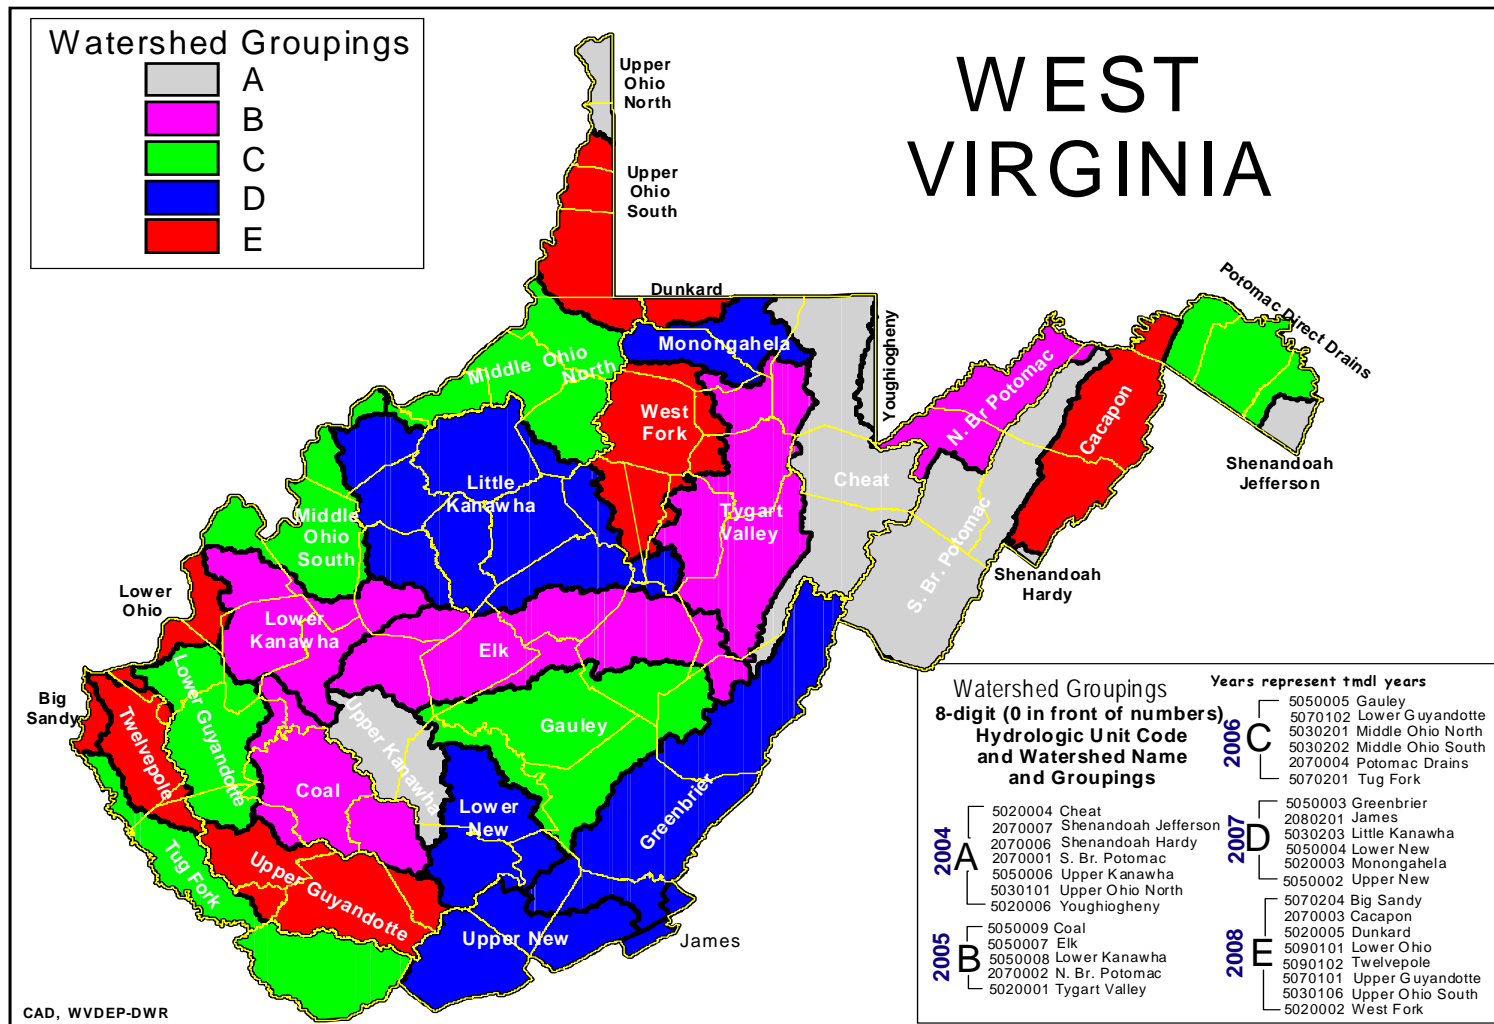


Figure 2-1. Hydrologic groupings of West Virginia’s watersheds

2.2 Water Quality Standards

The determination of impaired waters involves comparing instream conditions to applicable water quality standards. West Virginia's water quality standards are codified at Title 47 of the *Code of State Rules (CSR)*, Series 2, titled *Legislative Rules, Department of Environmental Protection: Requirements Governing Water Quality Standards*. These standards can be obtained online from the West Virginia Secretary of State internet site (<http://www.wvsos.com/csr/verify.asp?TitleSeries=47-02>).

Water quality standards consist of three components: designated uses; narrative and/or numeric water quality criteria necessary to support those uses; and an antidegradation policy. Appendix E of the Standards contains the numeric water quality criteria for a wide range of parameters, while Section 3 of the Standards contains the narrative water quality criteria.

Designated uses include: propagation and maintenance of aquatic life in warmwater fisheries and troutwaters, water contact recreation, and public water supply. In various streams in the Upper Ohio South watershed, warmwater fishery aquatic life use impairments have been determined pursuant to exceedances of iron, dissolved aluminum, chloride, and/or pH numeric water quality criteria. Water contact recreation and/or public water supply use impairments have also been determined in various waters pursuant to exceedances of numeric water quality criteria for fecal coliform bacteria, total iron, chloride and total manganese.

The manganese water quality criterion is applicable to five-mile zones upstream of known public or private water supply intakes used for human consumption. Based upon known intake locations, WVDEP delineated five-mile distances in an upstream direction along watercourses to determine streams within the zone of applicability of the criterion. WVDEP then assessed compliance with the criterion by reviewing available water quality monitoring results from streams within the zone and evaluated the base condition portrayed by the TMDL model. The evaluation determined that the manganese criterion is applicable in Glens Run and that Glens Run is impaired pursuant to the criterion.

All West Virginia waters are subject to the narrative criteria in Section 3 of the Standards. That section, titled "Conditions Not Allowable in State Waters," contains various general provisions related to water quality. The narrative water quality criterion at Title 47 CSR Series 2 – 3.2.i prohibits the presence of wastes in state waters that cause or contribute to significant adverse impacts to the chemical, physical, hydrologic, and biological components of aquatic ecosystems. This provision is the basis for "biological impairment" determinations. Biological impairment signifies a stressed aquatic community, and is discussed in detail in Section 4.

The numeric water quality criteria applicable to the impaired streams addressed by this report are summarized in Table 2-1. The stream-specific impairments related to both numeric and narrative water quality criteria are displayed in Table 3-3.

TMDLs presented herein are based upon the water quality criteria that are currently effective. If the West Virginia Legislature adopts water quality standard revisions that alter the basis upon which the TMDLs are developed, then the TMDLs and allocations may be modified as

warranted. Any future Water Quality Standard revision and/or TMDL modification must receive EPA approval prior to implementation.

Table 2-1. Applicable West Virginia water quality criteria

POLLUTANT	USE DESIGNATION				
	Aquatic Life				Human Health
	Warmwater Fisheries		Troutwaters		Contact Recreation/Public Water Supply
	Acute ^a	Chronic ^b	Acute ^a	Chronic ^b	
Aluminum, dissolved (µg/L)	750	750	750	87	--
Iron, total (mg/L)	--	1.5	--	0.5	1.5
Manganese, total (mg/L)	--	--	--	--	1.0 ^c
Chloride (mg/L)	860	230	860	230	250
pH	No values below 6.0 or above 9.0	No values below 6.0 or above 9.0	No values below 6.0 or above 9.0	No values below 6.0 or above 9.0	No values below 6.0 or above 9.0
Fecal coliform bacteria	Human Health Criteria Maximum allowable level of fecal coliform content for Primary Contact Recreation (either MPN [most probable number] or MF [membrane filter counts/test]) shall not exceed 200/100 mL as a monthly geometric mean based on not less than 5 samples per month; nor to exceed 400/100 mL in more than 10 percent of all samples taken during the month.				

^a One-hour average concentration not to be exceeded more than once every 3 years on the average.

^b Four-day average concentration not to be exceeded more than once every 3 years on the average.

^c Not to exceed 1.0 mg/L within the five-mile zone upstream of known public or private water supply intakes used for human consumption.

Source: 47 CSR, Series 2, *Legislative Rules, Department of Environmental Protection: Requirements Governing Water Quality Standards.*

3.0 WATERSHED DESCRIPTION AND DATA INVENTORY

3.1 Watershed Description

As shown in Figure 3-1, the Upper Ohio South watershed in West Virginia lies mostly within Brooke, Ohio, Marshall, and Wetzel Counties in West Virginia, and Washington and Greene Counties in Pennsylvania. In West Virginia and Pennsylvania, its drainage area encompasses approximately 863 square miles. The Ohio River mainstem runs south along the eastern border of the watershed. Major West Virginia tributaries include Wheeling Creek, Grave Creek and Buffalo Creek. The average elevation in the watershed is 1,114 feet. The highest point is 1,621 feet on a ridge top in the upper Wheeling Creek drainage, east of the town of Aleppo in Greene County, PA. The minimum elevation is 623 feet, located at the confluence of Grave Creek and the Ohio River near Moundsville, WV. The total population living in the subject watersheds of this report is estimated to be 96,000 people.

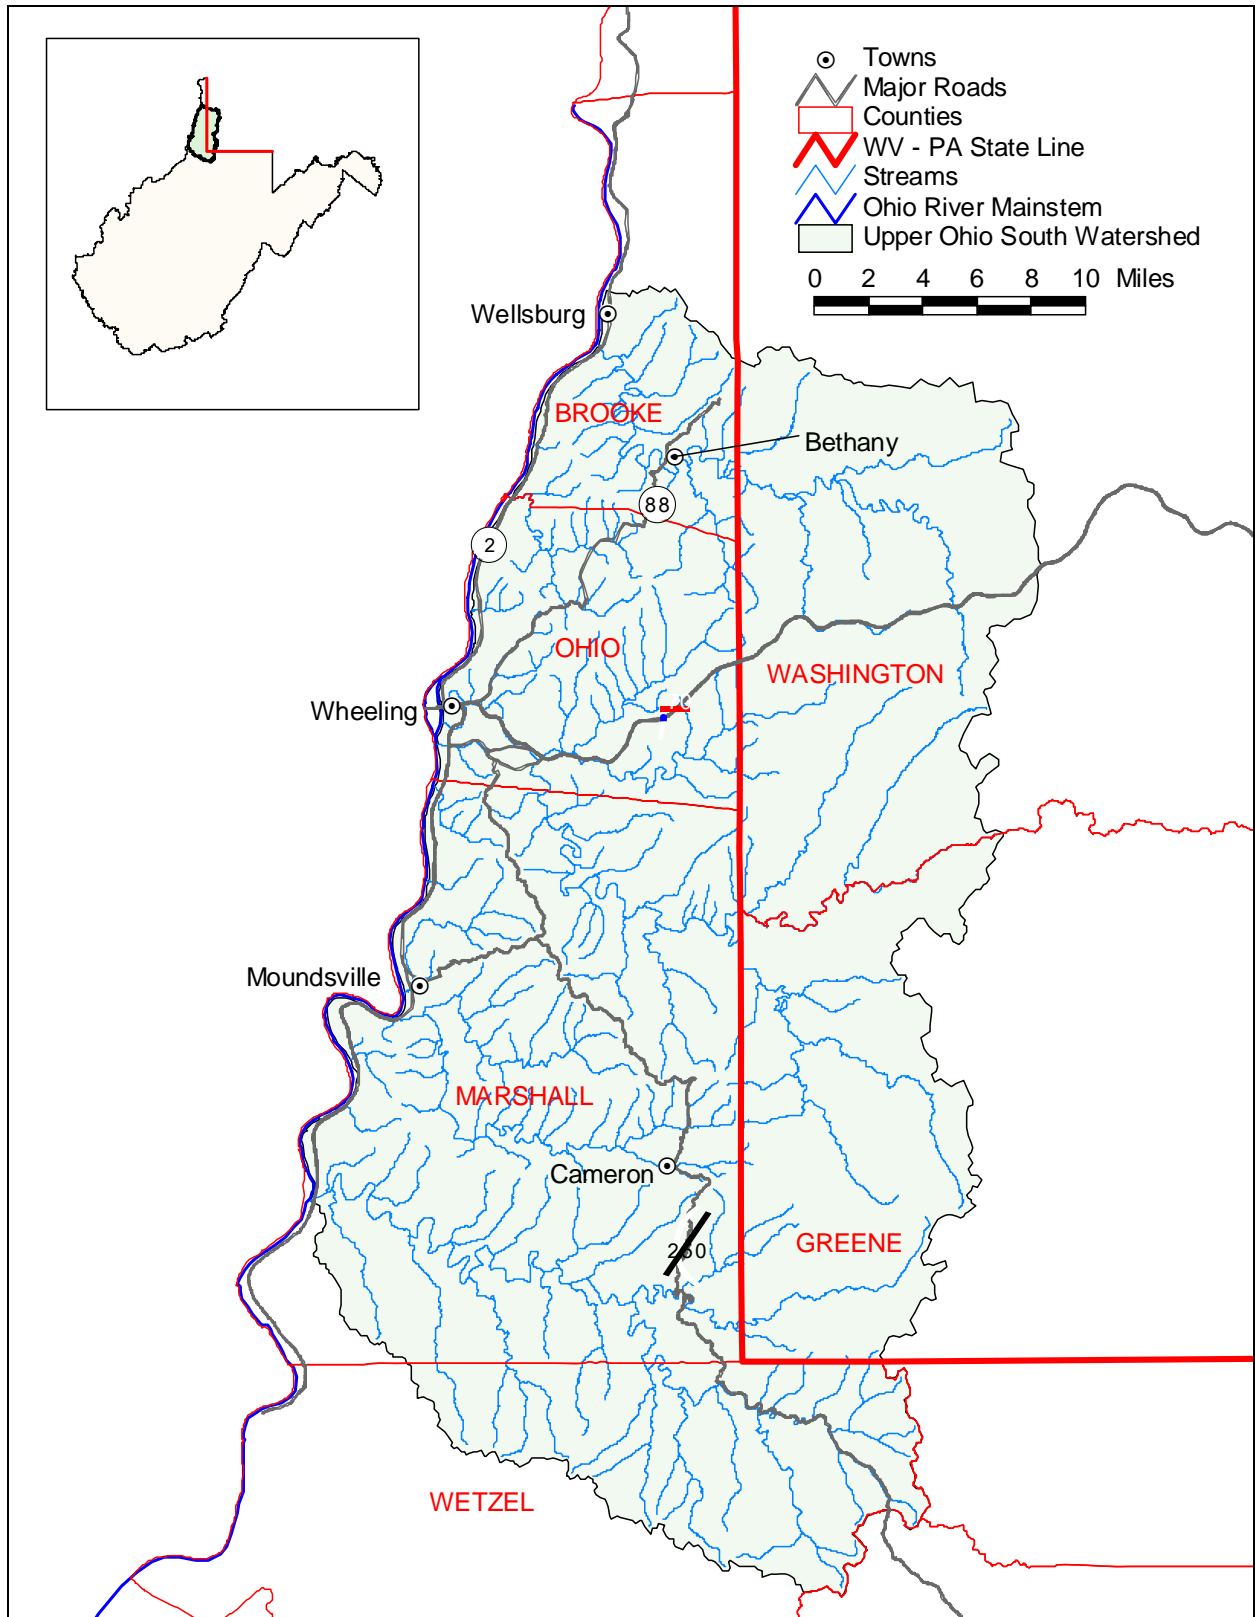


Figure 3-1. Location of the Upper Ohio South watershed in West Virginia

Table 3-1 displays the landuse distribution for the 282 modeled subwatersheds in the Upper Ohio South watershed. The dominant landuse is forest, which constitutes 65.3 percent of the total landuse area. Other important modeled landuse types are grassland (12.6 percent), urban/residential (9.0 percent), barren (5.0 percent), pasture (4.4 percent), and cropland (2.5 percent). Individually, all other land cover types compose one percent or less of the total watershed area.

Landuse and land cover estimates were originally obtained from vegetation data gathered from the National Land Cover Dataset (NLCD) 2001. The Multi-Resolution Land Characteristics Consortium (MRLC) produced the NLCD coverage. The NLCD database for West Virginia was derived from satellite imagery taken during the early 2000s, and it includes detailed vegetative spatial data. Enhancements and updates to the NLCD coverage were made to create a modeled landuse by custom edits derived primarily from WVDEP source tracking information and 2003 aerial photography with 1-meter resolution. Additional information regarding the NLCD spatial database is provided in Appendix C of the Technical Report.

Table 3-1. Modified landuse for the Upper Ohio South TMDL watersheds

Landuse Type	Area of Watershed		Percentage
	Acres	Square Miles	
Water	812.1	1.3	0.3%
Wetland	36.2	0.1	<0.1%
Barren	14,016.7	21.9	5.0%
Forest	183,639.7	286.9	65.3%
Grassland	35,312.5	55.2	12.6%
Cropland	6,976.0	10.9	2.5%
Pasture	12,488.4	19.5	4.4%
Urban/Residential	25,388.4	39.7	9.0%
Mining	2,228.1	3.5	0.8%
AML	455.2	0.7	0.2%
Total Area	281,353.3	439.6	100.00%

Note: < = less than

3.2 Data Inventory

Various sources of data were used in the TMDL development process. The data were used to identify and characterize sources of pollution and to establish the water quality response to those sources. Review of the data included a preliminary assessment of the watershed's physical and socioeconomic characteristics and current monitoring data. Table 3-2 identifies the data used to support the TMDL assessment and modeling effort. These data describe the physical conditions of the TMDL watersheds, the potential pollutant sources and their contributions, and the impaired waterbodies for which TMDLs need to be developed. Prior to TMDL development,

WVDEP collected comprehensive water quality data throughout the watershed. This pre-TMDL monitoring effort contributed the largest amount of water quality data to the process and is summarized in the Technical Report, Appendix I. The geographic information is provided in the ArcExplorer GIS project included on the CD version of this report.

Table 3-2. Datasets used in TMDL development

Type of Information		Data Sources
Watershed physiographic data	Stream network	West Virginia Division of Natural Resources (WVDNR)
	Landuse	National Land Cover Dataset 2001 (NLCD)
	2003 Aerial Photography (1-meter resolution)	WVDEP
	Counties	U.S. Census Bureau
	Cities/populated places	U.S. Census Bureau
	Soils	State Soil Geographic Database (STATSGO) U.S. Department of Agriculture (USDA), Natural Resources Conservation Service (NRCS) soil surveys
	Hydrologic Unit Code boundaries	U.S. Geological Survey (USGS)
	Topographic and digital elevation models (DEMs)	National Elevation Dataset (NED)
	Dam locations	USGS
	Roads	U.S. Census Bureau TIGER, WVU WV Roads
	Water quality monitoring station locations	WVDEP, USEPA STORET
	Meteorological station locations	National Oceanic and Atmospheric Administration, National Climatic Data Center (NOAA-NCDC)
	Permitted facility information	WVDEP Division of Water and Waste Management (DWWM), WVDEP Division of Mining and Reclamation (DMR)
	Timber harvest data	WV Division of Forestry
	Oil and gas operations coverage	WVDEP Office of Oil and Gas (OOG)
Abandoned mining coverage	WVDEP DMR	
Monitoring data	Historical Flow Record (daily averages)	USGS
	Rainfall	NOAA-NCDC
	Temperature	NOAA-NCDC
	Wind speed	NOAA-NCDC
	Dew point	NOAA-NCDC
	Humidity	NOAA-NCDC
	Cloud cover	NOAA-NCDC
	Water quality monitoring data	USEPA STORET, WVDEP
	National Pollutant Discharge Elimination System (NPDES) data	WVDEP DMR, WVDEP DWWM
	Discharge Monitoring Report data	WVDEP DMR, Mining Companies
	Abandoned mine land data	WVDEP DMR, WVDEP DWWM
Regulatory or policy information	Applicable water quality standards	WVDEP
	Section 303(d) list of impaired waterbodies	WVDEP, USEPA
	Nonpoint Source Management Plans	WVDEP

3.3 Impaired Waterbodies

WVDEP conducted extensive water quality monitoring throughout the Upper Ohio South watershed from July 2005 through June 2006. The results of that effort were used to confirm the impairments of waterbodies identified on previous 303(d) lists and to identify other impaired waterbodies that were not previously listed.

In this TMDL development effort, modeling at baseline conditions demonstrated additional pollutant impairments to those identified via monitoring. The prediction of impairment through modeling is validated by applicable federal guidance for 303(d) listing. WVDEP could not perform water quality monitoring and source characterization at frequencies or sample location resolution sufficient to comprehensively assess water quality under the terms of applicable water quality standards, and modeling was needed to complete the assessment. Where existing pollutant sources were predicted to cause noncompliance with a particular criterion, the subject water was characterized as impaired for that pollutant.

TMDLs were developed for impaired waters in 14 TMDL watersheds (Figure 3-2). The impaired waters for which TMDLs have been developed are presented in Table 3-3. The table includes the TMDL watershed, stream code, stream name, and impairments for each stream.

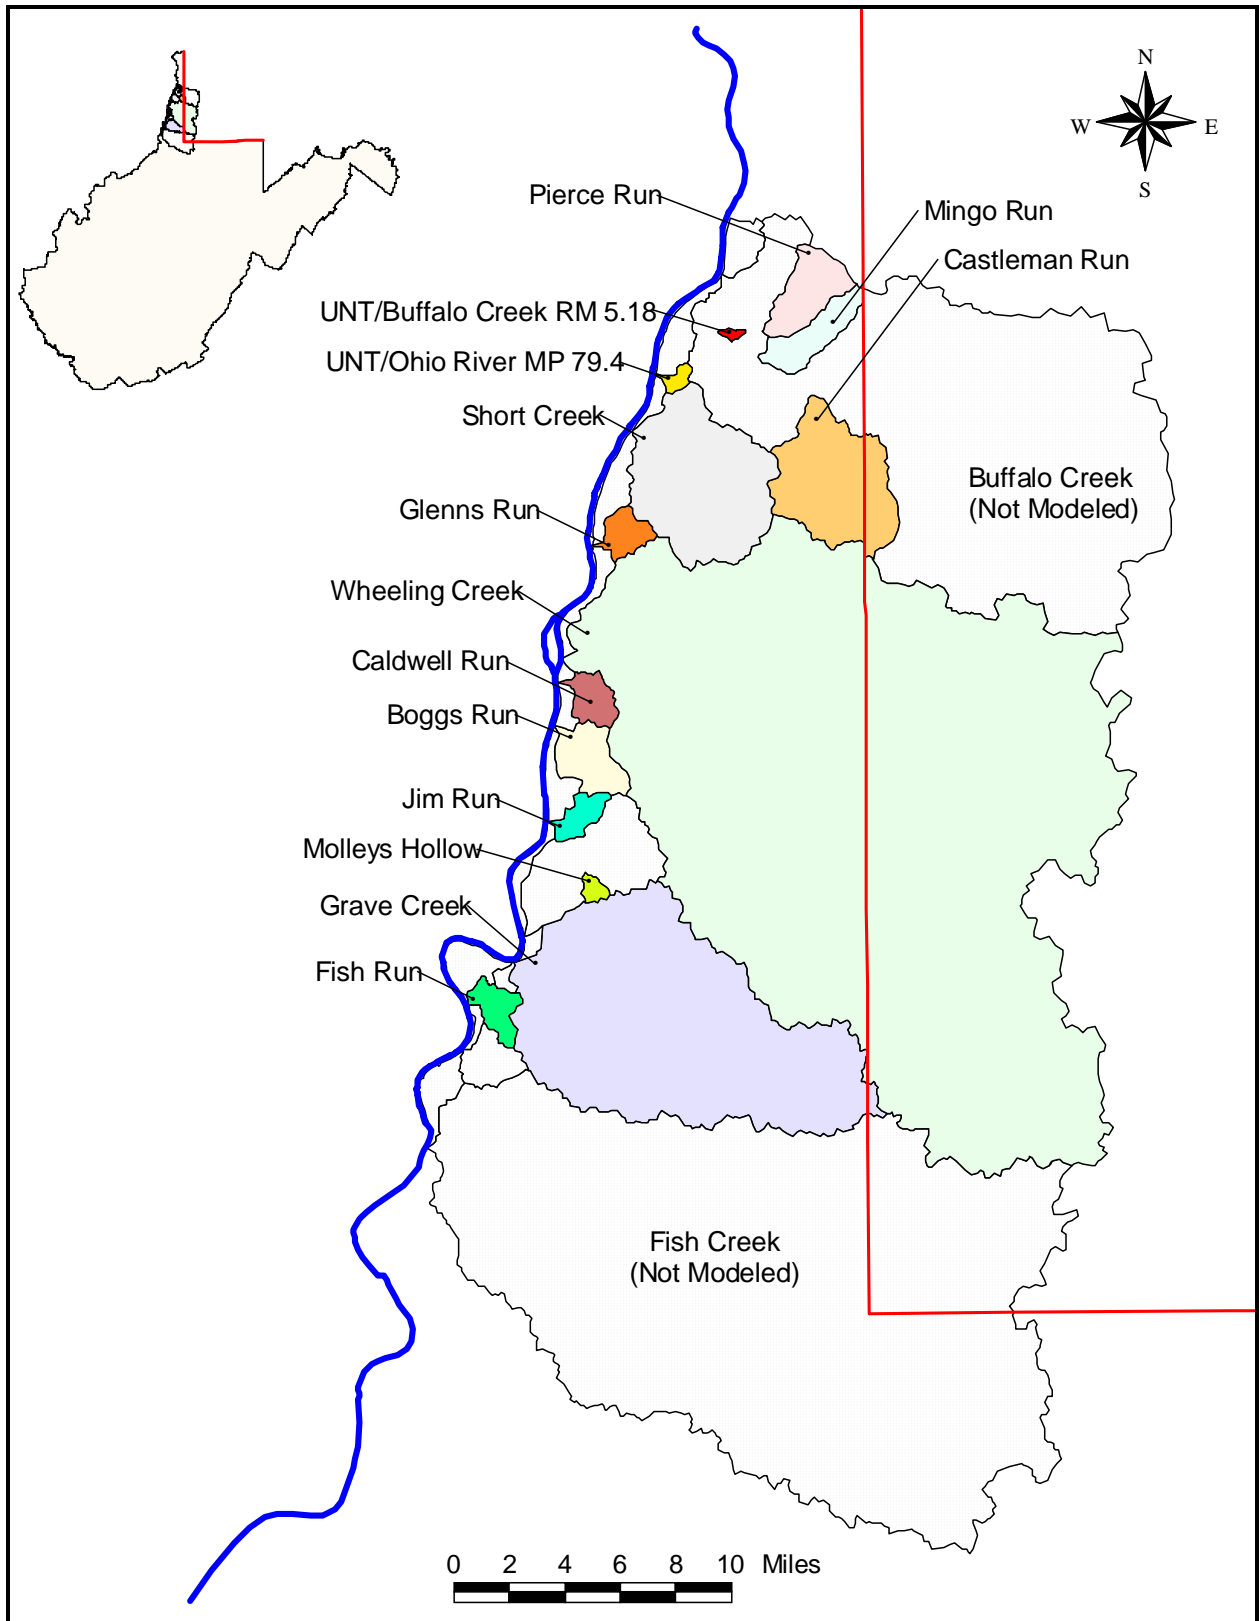


Figure 3-2. 14 Upper Ohio South TMDL watersheds

Table 3-3. Waterbodies and impairments for which TMDLs have been developed

Stream Name	NHD_Code	Trout	pH	Fe	Al	Mn	Cl	FC	BIO
Grave Creek	WV-OUS-10			x				x	x
North Fork/Grave Creek	WV-OUS-10-AC			X				x	x
Middle Grave Creek	WV-OUS-10-C			X				x	x
North Fork/Middle Grave Creek	WV-OUS-10-C-11							x	
Whitney Run	WV-OUS-10-C-18			X				x	x
UNT/Whitney Run RM 0.3	WV-OUS-10-C-18-A			X				x	
McLain Run	WV-OUS-10-C-2			X					
Toms Run	WV-OUS-10-C-3			X				x	
Leach Run	WV-OUS-10-C-3-B			X					
Little Toms Run	WV-OUS-10-C-4							x	
Meetinghouse Hollow	WV-OUS-10-C-6			X					
Bartletts Run	WV-OUS-10-C-7							x	
Wells Run	WV-OUS-10-C-9							x	
UNT/Grave Creek RM 2.41	WV-OUS-10-D							x	
Lick Run	WV-OUS-10-Q							x	
French Run	WV-OUS-10-R							x	
Burch Run	WV-OUS-10-W							x	
Molleys Hollow	WV-OUS-11-G							x	
Jim Run	WV-OUS-12							x	x
Boggs Run	WV-OUS-15			x				x	
Browns Run	WV-OUS-15-A			x				x	
UNT/Boggs Run RM 2.69	WV-OUS-15-C						x		
Caldwell Run	WV-OUS-16			x				x	x
George Run	WV-OUS-16-A							x	
Wheeling Creek	WV-OUS-17							x	
UNT/Wheeling Creek RM 25.77	WV-OUS-17-AF						x	x	
UNT/Wheeling Creek RM 26.23	WV-OUS-17-AG							x	
UNT/Wheeling Creek RM 26.55	WV-OUS-17-AH							x	
Enlow Fork	WV-OUS-17-AL							x	
Long Run	WV-OUS-17-B			x				x	x
Waddles Run	WV-OUS-17-B-3			x				x	x
UNT/Waddles Run RM 1.72	WV-OUS-17-B-3-A			X					
Pogue Run	WV-OUS-17-B-8			X				x	x
Little Wheeling Creek	WV-OUS-17-H			x				x	
Peters Run	WV-OUS-17-H-1			x				x	x
Battle Run	WV-OUS-17-H-10			X				x	
McGraw Run	WV-OUS-17-H-12							x	
UNT/Little Wheeling Creek RM 8.97	WV-OUS-17-H-19							x	
Middle Wheeling Creek	WV-OUS-17-H-2			x				x	

Stream Name	NHD_Code	Trout	pH	Fe	Al	Mn	Cl	FC	BIO
UNT/Middle Wheeling Creek RM 3.05	WV-OUS-17-H-2-E							x	
Tanyard Run	WV-OUS-17-H-2-F							x	
Laidley Run	WV-OUS-17-H-2-N							x	
Todd Run	WV-OUS-17-H-2-Q			X				x	x
McCoy Run	WV-OUS-17-H-5			X				x	
Point Run	WV-OUS-17-H-7			X				x	x
Roneys Point Run	WV-OUS-17-H-8			X				x	x
Britt Run	WV-OUS-17-M							x	
Grandstaff Run	WV-OUS-17-P							x	
Wherry Run	WV-OUS-17-P-6							x	
Hollidays Run	WV-OUS-17-T							x	
Burch Run	WV-OUS-17-W							x	
Big Run	WV-OUS-17-W-1							x	
UNT/Big Run RM 0.26	WV-OUS-17-W-1-A							x	
Stull Run	WV-OUS-17-Z							x	
Glenns Run	WV-OUS-18		x	x	x	x			x
Graeb Hollow	WV-OUS-18-A			x					
UNT/Glenns Run RM 1.25	WV-OUS-18-B			x					
Short Creek	WV-OUS-21							x	
Girty Run	WV-OUS-21-A							x	
North Fork/Short Creek	WV-OUS-21-F						x	x	
UNT/North Fork RM 1.32/Short Creek	WV-OUS-21-F-3							x	x
Huff Run	WV-OUS-21-F-4						x	x	
UNT/North Fork RM 2.55/Short Creek	WV-OUS-21-F-7							x	
UNT/North Fork RM 2.77/Short Creek	WV-OUS-21-F-8							x	
Weidman Run	WV-OUS-21-F-9							x	x
UNT/Ohio River MP 79.4	WV-OUS-22							x	
Pierce Run	WV-OUS-24-D			x				x	x
UNT/Pierce Run RM 2.67	WV-OUS-24-D-6							x	
UNT/Buffalo Creek RM 5.18	WV-OUS-24-F			x					
Mingo Run	WV-OUS-24-H							x	
Castleman Run	WV-OUS-24-O							x	x
Rices Run	WV-OUS-24-O-13							x	
Longs Run	WV-OUS-24-O-3							x	
Fish Run	WV-OUS-6							x	
UNT/Fish Run RM 0.79	WV-OUS-6-B							x	

Note:

RM is River Mile

MP is Mile Point

UNT = unnamed tributary.

FC indicates fecal coliform bacteria impairment

BIO indicates a biological impairment

4.0 BIOLOGICAL IMPAIRMENT AND STRESSOR IDENTIFICATION

Initially, TMDL development in biologically impaired waters requires identification of the pollutants that cause the stress to the biological community. Sources of those pollutants are often analogous to those already described: mine drainage, untreated sewage, and sediment. Section 2 of the Technical Report discusses biological impairment and the SI process in detail.

4.1 Introduction

Assessment of the biological integrity of a stream is based on a survey of the stream's benthic macroinvertebrate community. Benthic macroinvertebrate communities are rated using a multimetric index developed for use in wadeable streams of West Virginia. The West Virginia Stream Condition Index (WVSCI; Gerritsen et al., 2000) is composed of six metrics that were selected to maximize discrimination between streams with known impairments and reference streams. In general, streams with WVSCI scores of fewer than 60.6 points, on a normalized 0–100 scale, are considered biologically impaired.

Biological assessments are useful in detecting impairment, but they may not clearly identify the causes of impairment, which must be determined before TMDL development can proceed. USEPA developed *Stressor Identification: Technical Guidance Document* (Cormier et al., 2000) to assist water resource managers in identifying stressors and stressor combinations that cause biological impairment. Elements of the SI process were used to evaluate and identify the significant stressors to the impaired benthic communities. In addition, custom analyses of biological data were performed to supplement the framework recommended by the guidance document.

The general SI process entailed reviewing available information, forming and analyzing possible stressor scenarios, and implicating causative stressors. The SI method provides a consistent process for evaluating available information. TMDLs were established for the responsible pollutants at the conclusion of the SI process. As a result, the TMDL process established a link between the impairment and benthic community stressors.

4.2 Data Review

WVDEP generated the primary data used in SI through its pre-TMDL monitoring program. The program included water quality monitoring, benthic sampling, and habitat assessment. In addition, the biologists' comments regarding stream condition and potential stressors and sources were captured and considered. Other data sources were: source tracking data, WVDEP mining activities data, NLCD 2001 landuse information, Natural Resources Conservation Service (NRCS) State Soil Geographic database (STATSGO) soils data, NPDES point source data, and literature sources.

4.3 Candidate Causes/Pathways

The first step in the SI process was to develop a list of candidate causes, or stressors. The candidate causes responsible for biological impairments are listed below:

- Metals contamination (including metals contributed through soil erosion) causes toxicity
- Acidity (low pH) causes toxicity
- Increased ionic strength causes toxicity
- Organic enrichment (e.g. sewage discharges and agricultural runoff cause habitat alterations
- Increased total suspended solids (TSS)/erosion and altered hydrology cause sedimentation and other habitat alterations
- Altered hydrology causes higher water temperature, resulting in direct impacts
- Altered hydrology, nutrient enrichment, and increased biochemical oxygen demand (BOD) cause reduced dissolved oxygen (DO)
- Algal growth causes food supply shift
- High levels of ammonia cause toxicity (including increased toxicity due to algal growth)
- Chemical spills cause toxicity

A conceptual model was developed to examine the relationship between candidate causes and potential biological effects. The conceptual model (Figure 4-1) depicts the sources, stressors, and pathways that affect the biological community.

WV Biological TMDLs - Conceptual Model of Candidate Causes

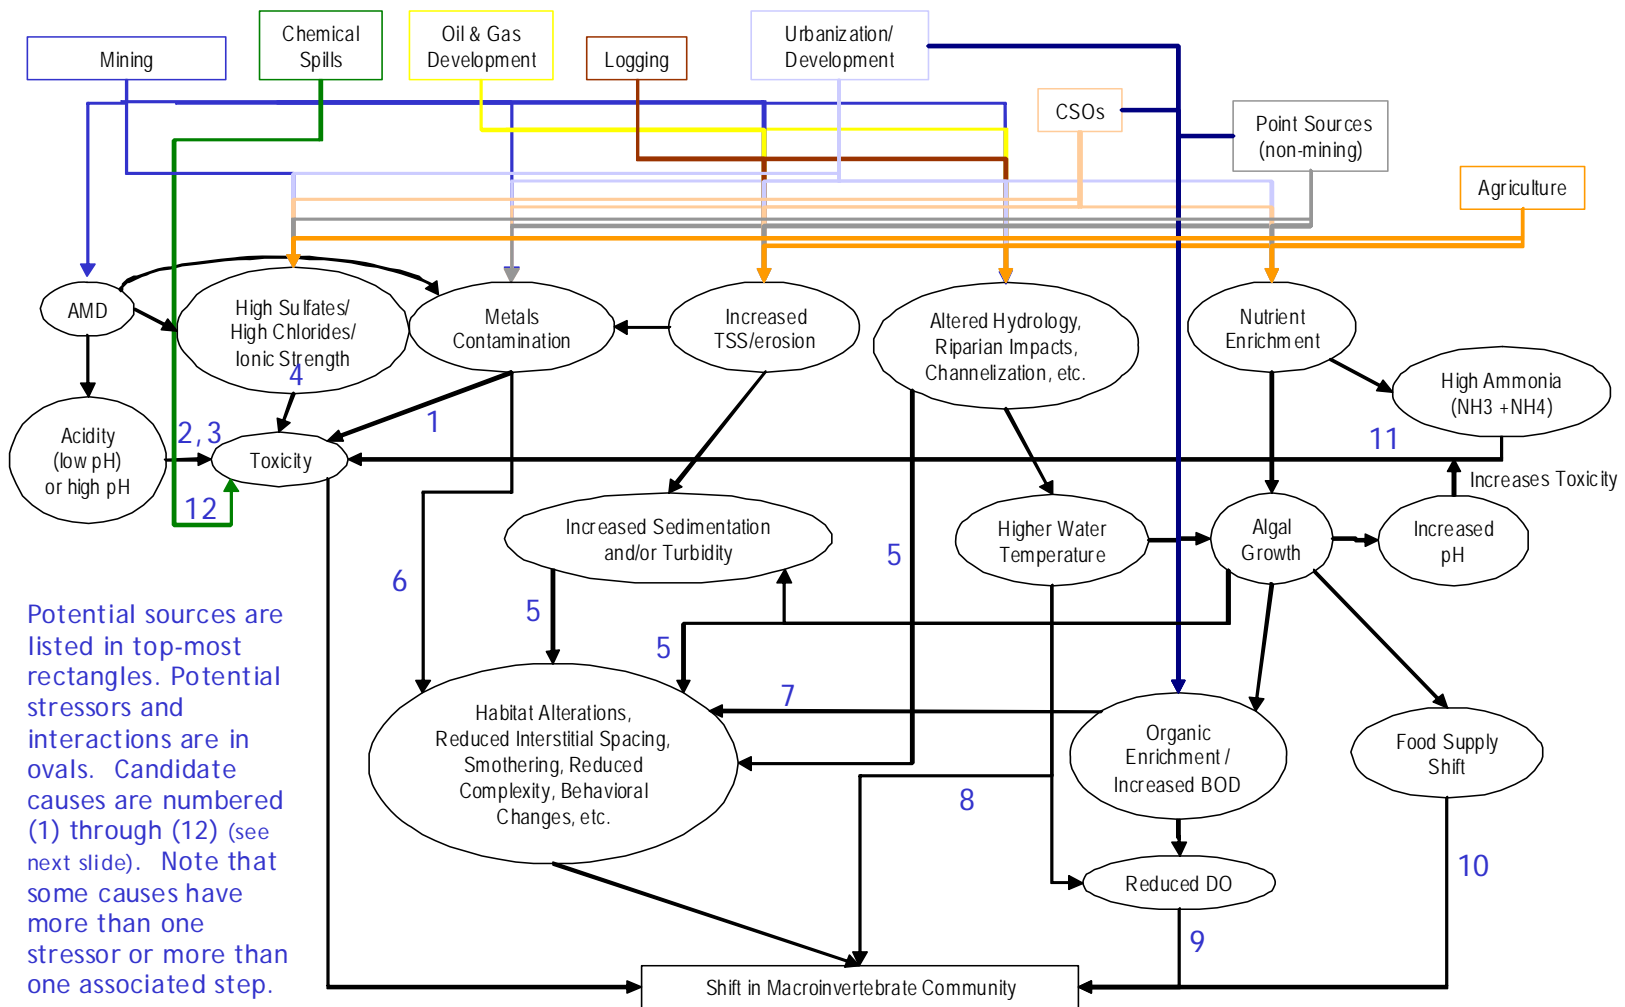


Figure 4-1. Conceptual model of candidate causes and potential biological effects

4.4 Stressor Identification Results

The SI process determined the significant causes of biological impairment. Biological impairment was linked to a single stressor in some cases and multiple stressors in others. The SI process identified the following stressors for the biologically impaired waters in the Upper Ohio South watershed:

- Metals toxicity (aluminum)
- pH toxicity
- Organic enrichment (the combined effects of oxygen-demanding pollutants, nutrients, and the resultant algal and habitat alteration)
- Sedimentation
- Metals flocculation
- Ionic toxicity

After stressors were identified, WVDEP determined the pollutants for which TMDLs were required to address the impairment.

The SI process identified metals toxicity, metals flocculation and pH toxicity as biological stressors in waters that also demonstrated violations of the iron, aluminum, or pH water quality criteria for protection of aquatic life. WVDEP determined that the implementation of those pollutant-specific TMDLs would address the biological impairment.

Where the SI process identified organic enrichment as the cause of biological impairment, data also indicated violations of the fecal coliform water quality criteria. The predominant sources of both organic enrichment and fecal coliform bacteria in the watershed are inadequately treated sewage and runoff from agricultural landuses. WVDEP determined that implementation of fecal coliform TMDLs would remove untreated sewage and significantly reduce loadings in agricultural runoff and resolve the biological impairment in these streams. Therefore, fecal coliform TMDLs will serve as a surrogate where organic enrichment was identified as a stressor.

WVDEP initially pursued the development of TMDLs directly for sediment to address the sedimentation biological stressor. The intended approach involved selection of a reference stream with an unimpaired biological condition, prediction of the sediment loading present in the reference stream, and use of the area-normalized sediment loading of the reference stream as the TMDL endpoint for sediment impaired waters.

Britt Run (WV-OUS-17-M) was selected as the achievable reference stream as it shares similar landuse, ecoregion and geomorphologic characteristics with the sediment impaired streams. The location of Britt Run is shown in Figure 4-2.

All of the biologically impaired waters for which sedimentation was identified as a significant stressor are also impaired pursuant to total iron water quality criteria and the TMDL assessment for iron included representation and allocation of iron loadings associated with sediment. In each stream, the sediment loading reduction necessary for attainment of water quality criteria for iron exceeds that which was determined to be necessary using the reference approach. As such, the iron TMDLs are acceptable surrogates for biological impairments from sedimentation.

In certain waters (Boggs Run, UNT/Boggs Run RM 2.69, Browns Run, Graeb Hollow, Short Creek, Girty Run, North Fork/Short Creek, Huff Run, and UNT/Ohio River MP 79.4), the SI process determined ionic toxicity to be a significant stressor. In certain waters, chlorides water quality criteria are not attained and chlorides TMDLs are presented. Although the reduction of chlorides concentrations should positively impact stream biology, it could not be determined that the attainment of chlorides water quality criteria alone would resolve the biological impairments. A strong presence of sulfates and other dissolved solids exists in those waters and in all other streams where ionic toxicity has been determined to be a significant biological stressor. There is insufficient information available regarding the causative pollutants and their associated impairment thresholds for biological TMDL development for ionic toxicity at this time. Therefore, WVDEP is deferring biological TMDL development for ionic toxicity stressed streams and retaining those waters on the Section 303(d) list.

Table 4-1. Significant stressors of biologically impaired streams in the Upper Ohio South watershed

Stream	NHD_Code	Biological Stressors	TMDLs Developed
Grave Creek	WV-OUS-10	Sedimentation Organic Enrichment	Total Iron Fecal Coliform
Middle Grave Creek	WV-OUS-10-C	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Whitney Run	WV-OUS-10-C-18	Organic Enrichment	Fecal Coliform
North Fork/Grave Creek	WV-OUS-10-AC	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Jim Run	WV-OUS-12	Organic Enrichment	Fecal Coliform
Boggs Run	WV-OUS-15	Organic Enrichment Ionic Stress	Fecal Coliform Retain biological impairment on 303(d) List
UNT/Boggs Run RM 2.69	WV-OUS-15-C	Ionic Stress	Retain biological impairment on 303(d) List
Browns Run	WV-OUS-15-A	Organic Enrichment Sedimentation Ionic Stress	Fecal Coliform Total Iron Retain biological impairment on 303(d) List
Caldwell Run	WV-OUS-16	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Long Run	WV-OUS-17-B	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Waddles Run	WV-OUS-17-B-3	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Pogue Run	WV-OUS-17-B-8	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Peters Run	WV-OUS-17-H-1	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Todd Run	WV-OUS-17-H-2-Q	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Point Run	WV-OUS-17-H-7	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Roneys Point Run	WV-OUS-17-H-8	Organic Enrichment Sedimentation	Fecal Coliform Total Iron
Glenns Run	WV-OUS-18	Metals Toxicity Metals Flocculation pH toxicity (acidity)	Dissolved Aluminum Total Iron pH

Stream	NHD_Code	Biological Stressors	TMDLs Developed
Graeb Hollow	WV-OUS-18-A	Ionic Stress	Retain biological impairment on 303(d) List
Short Creek	WV-OUS-21	Organic Enrichment Ionic Stress	Fecal Coliform Retain biological impairment on 303(d) List
Girty Run	WV-OUS-21-A	Ionic Stress	Retain biological impairment on 303(d) List
North Fork/Short Creek	WV-OUS-21-F	Organic Enrichment Ionic Stress	Fecal Coliform Retain biological impairment on 303(d) List
UNT/North Fork RM 1.32/Short Creek	WV-OUS-21-F-3	Organic Enrichment	Fecal Coliform
Huff Run	WV-OUS-21-F-4	Organic Enrichment Ionic Stress	Fecal Coliform Retain biological impairment on 303(d) List
Weidman Run	WV-OUS-21-F-9	Organic Enrichment	Fecal Coliform
UNT/Ohio River MP 79.4	WV-OUS-22	Organic Enrichment Ionic Stress	Fecal Coliform Retain biological impairment on 303(d) List
Pierce Run	WV-OUS-24-D	Organic Enrichment	Fecal Coliform
Castleman Run	WV-OUS-24-O	Organic Enrichment	Fecal Coliform

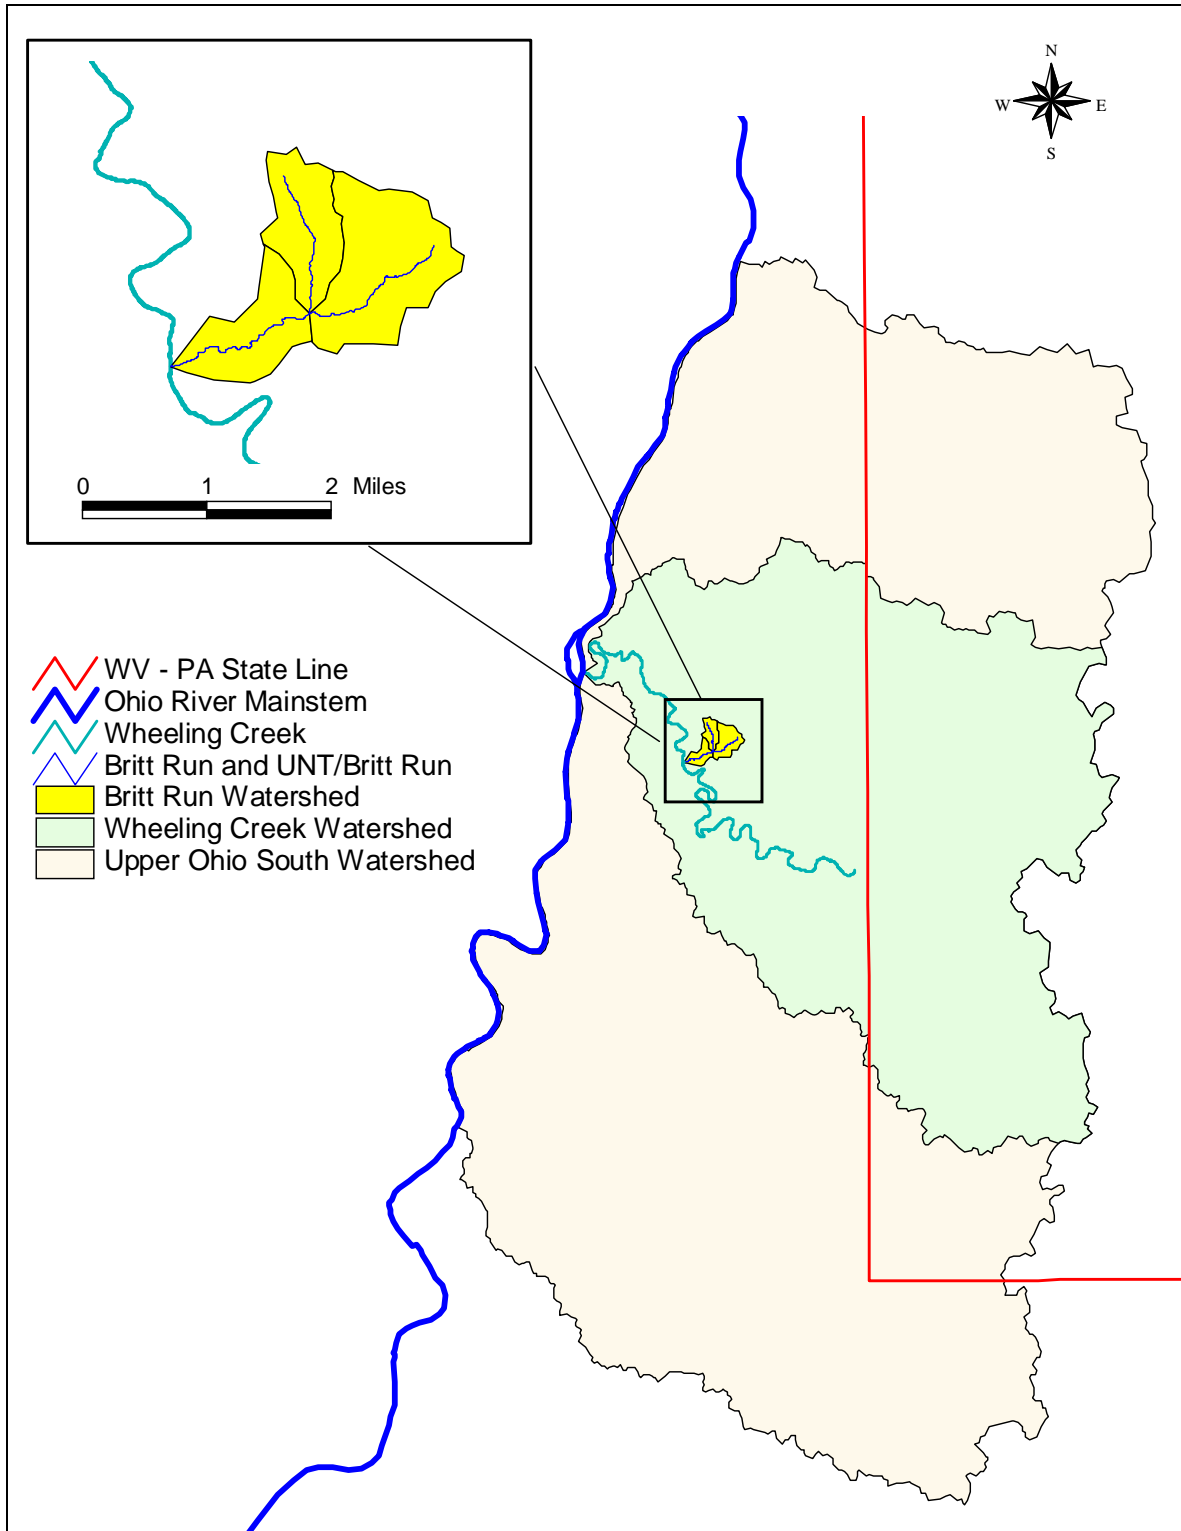


Figure 4-2. Location of the sediment reference stream, Britt Run (WV-OUS-17-M)

5.0 METALS SOURCE ASSESSMENT

This section identifies and examines the potential sources of iron, aluminum, and manganese impairments in the Upper Ohio South watershed. Sources can be classified as point (permitted) or nonpoint (non-permitted) sources.


A point source, according to 40 CFR 122.3, is any discernible, confined, and discrete conveyance, including but not limited to any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, landfill leachate collection system, and vessel or other floating craft from which pollutants are or may be discharged. The National Pollutant Discharge Elimination System (NPDES) program, established under Clean Water Act Sections 318, 402, and 405, requires permits for the discharge of pollutants from point sources. For purposes of this TMDL, NPDES-permitted discharge points are considered point sources.

Nonpoint sources of pollutants are diffuse, non-permitted sources. They most often result from precipitation-driven runoff. For the purposes of these TMDLs only, WLAs are given to NPDES-permitted discharge points, and LAs are given to discharges from activities that do not have an associated NPDES permit, such as bond forfeiture sites and AML. The assignment of LAs to AML and bond forfeiture sites does not reflect any determination by WVDEP or USEPA as to whether there are, in fact, unpermitted point source discharges within these landuses. Likewise, by establishing these TMDLs with mine drainage discharges treated as LAs, WVDEP and USEPA are not determining that these discharges are exempt from NPDES permitting requirements.

The physiographic data discussed in Section 3 enabled the characterization of pollutant sources. As part of the TMDL development process, WVDEP performed additional field-based source tracking activities to supplement the available source characterization data. WVDEP staff recorded physical descriptions of pollutant sources and the general stream condition in the vicinity of the sources. WVDEP collected global positioning system (GPS) data and water quality samples for laboratory analysis as necessary to characterize the sources and their impacts. Source tracking information was compiled and electronically plotted on maps using GIS software. Detailed information, including the locations of pollutant sources, is provided in the following sections, the Technical Report, and the ArcExplorer project on the CD version of this TMDL report.

5.1 Metals Point Sources

Metals point sources are classified by the mining- and non-mining-related permits issued by WVDEP. The following sections discuss the potential impacts and the characterization of these source types, the locations of which are displayed in Figure 5-1.

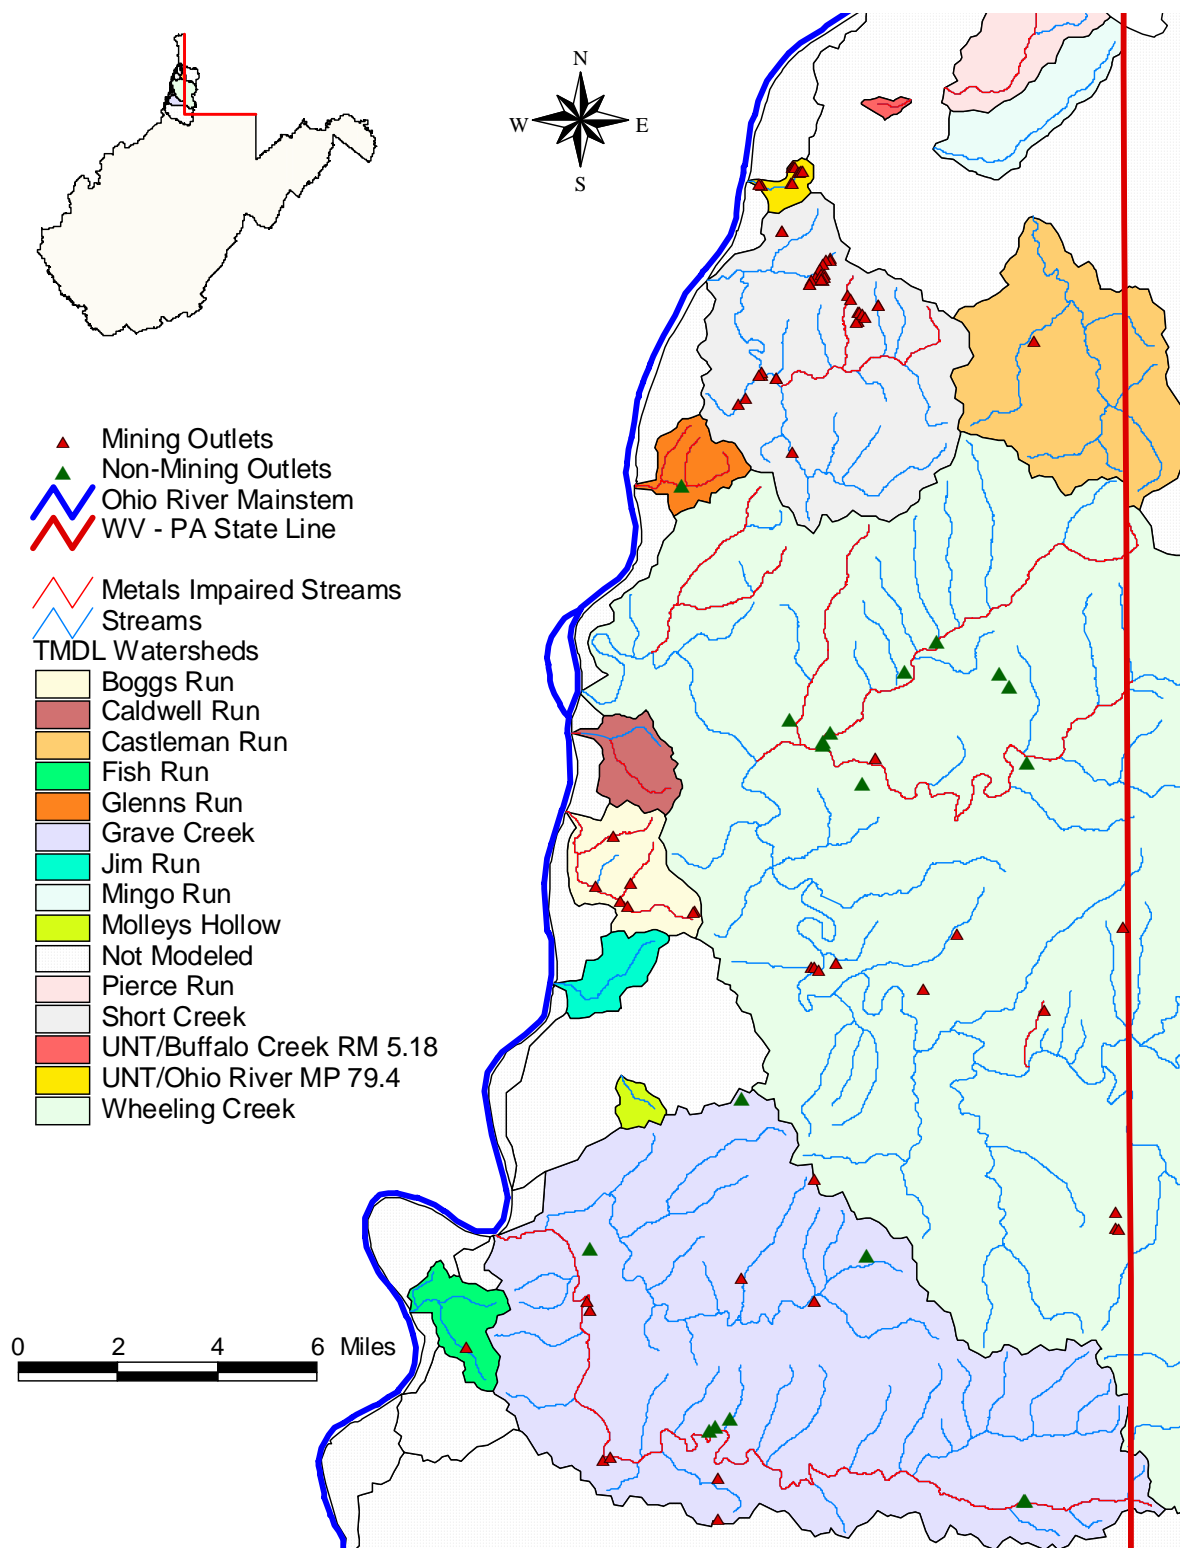

(Note: permits in close proximity appear to overlap in the figure)

Figure 5-1. Metals point sources in the Upper Ohio South watershed

5.1.1 Mining Point Sources

The Surface Mining Control and Reclamation Act of 1977 (SMCRA, Public Law 95-87) and its subsequent revisions were enacted to establish a nationwide program to protect the beneficial uses of land or water resources, protect public health and safety from the adverse effects of current surface coal mining operations, and promote the reclamation of mined areas left without adequate reclamation prior to August 3, 1977. SMCRA requires a permit for development of new, previously mined, or abandoned sites for the purpose of surface mining. Permittees are required to post a performance bond that will be sufficient to ensure the completion of reclamation requirements by a regulatory authority in the event that the applicant forfeits its permit. Mines that ceased operations before the effective date of SMCRA (often called “pre-law” mines) are not subject to the requirements of the SMCRA.

SMCRA Title IV is designed to provide assistance for the reclamation and restoration of abandoned mines; whereas, Title V states that any surface coal mining operations must be required to meet all applicable performance standards. Some general performance standards include the following:

- Restoring the affected land to a condition capable of supporting the uses that it was capable of supporting prior to any mining
- Backfilling and compacting (to ensure stability or to prevent leaching of toxic materials) to restore the approximate original contour of the land, including all highwalls
- Minimizing disturbances to the hydrologic balance and to the quality and quantity of water in surface water and groundwater systems both during and after surface coal mining operations and during reclamation by avoiding acid or other toxic mine drainage

Untreated mining-related point source discharges from deep, surface, and other mines may have low pH values (i.e. acidic) and contain high concentrations of metals (iron and aluminum). Mining-related activities are commonly issued NPDES discharge permits that contain effluent limits for total iron, total manganese, total suspended solids, and pH. Many permits also include effluent monitoring requirements for total aluminum and some, more recently issued permits include aluminum water quality based effluent limits. WVDEP’s Division of Mining and Reclamation (DMR) provided a spatial coverage of the mining-related NPDES permit outlets. The discharge characteristics, related permit limits and discharge data for these NPDES outlets were acquired from West Virginia’s ERIS database system. The spatial coverage was used to determine the location of the permit outlets. Additional information was needed, however, to determine the areas of the mining activities. WVDEP DMR also provided spatial coverage of the mining permit areas and related SMCRA Article 3 and NPDES permit information. WVDEP DWWM personnel used the information contained in the SMCRA Article 3 and NPDES permits to further characterize the mining point sources. Information gathered included type of discharge, pump capacities, and drainage areas (including total and disturbed areas). Using this information, the mining point sources were then represented in the model and assigned individual WLAs for metals.

There are six mining-related NPDES permits, with 22 associated outlets in the metals impaired watersheds of the Upper Ohio South watershed. Some permits include multiple outlets with discharges to more than one TMDL watershed. A complete list of the permits and outlets is provided in Appendix G of the Technical Report. Figure 5-1 illustrates the extent of the mining NPDES outlets in the watershed.

5.1.2 Non-mining Point Sources


WVDEP DWWM controls water quality impacts from non-mining activities with point source discharges through the issuance of NPDES permits. WVDEP's OWRNPDES GIS coverage was used to determine the locations of these sources, and detailed permit information was obtained from WVDEP's ERIS database. Sources may include the process wastewater discharges from water treatment plants and industrial manufacturing operations, and stormwater discharges associated with industrial activity.

There are 15 modeled non-mining NPDES permits in the watersheds of metals impaired streams, which are displayed in Figure 5-1. Fourteen (14) of the non-mining permits regulate stormwater associated with industrial activity and implement stormwater benchmark values of 100 mg/L TSS and/or 1.0 mg/L total iron. An additional outlet is associated with a groundwater remediation project registered under the Ground Water Remediation General NPDES Permit and is subject to an existing 1.2 mg/L monthly average total iron limitation. The assigned WLAs for all non-mining NPDES outlets allow for continued discharge under existing permit requirements. A complete list of the permits and outlets is provided in Appendix G of the Technical Report.

5.1.3 Construction Stormwater Permits

The discharges from construction activities that disturb more than one acre of land are legally defined as point sources and the sediment introduced from such discharges can contribute iron and aluminum. WVDEP issues a General NPDES Permit (permit WV0115924) to regulate stormwater discharges associated with construction activities with a land disturbance greater than one acre. These permits require that the site have properly installed best management practices (BMPs), such as silt fences, sediment traps, seeding/mulching, and riprap, to prevent or reduce erosion and sediment runoff. The BMPs will remain intact until the construction is complete and the site has been stabilized. Individual registration under the General Permit is usually limited to less than one year.

There are 20 active construction sites with a total disturbed acreage of 158.3 acres registered under the Construction Stormwater General Permit in the watersheds of metals impaired waters (Figure 5-2). Although specific wasteload allocations are not prescribed for these sites, the associated disturbed areas conform to the subwatershed-based allocations for registrations under the permit, as described in Section 9.0.

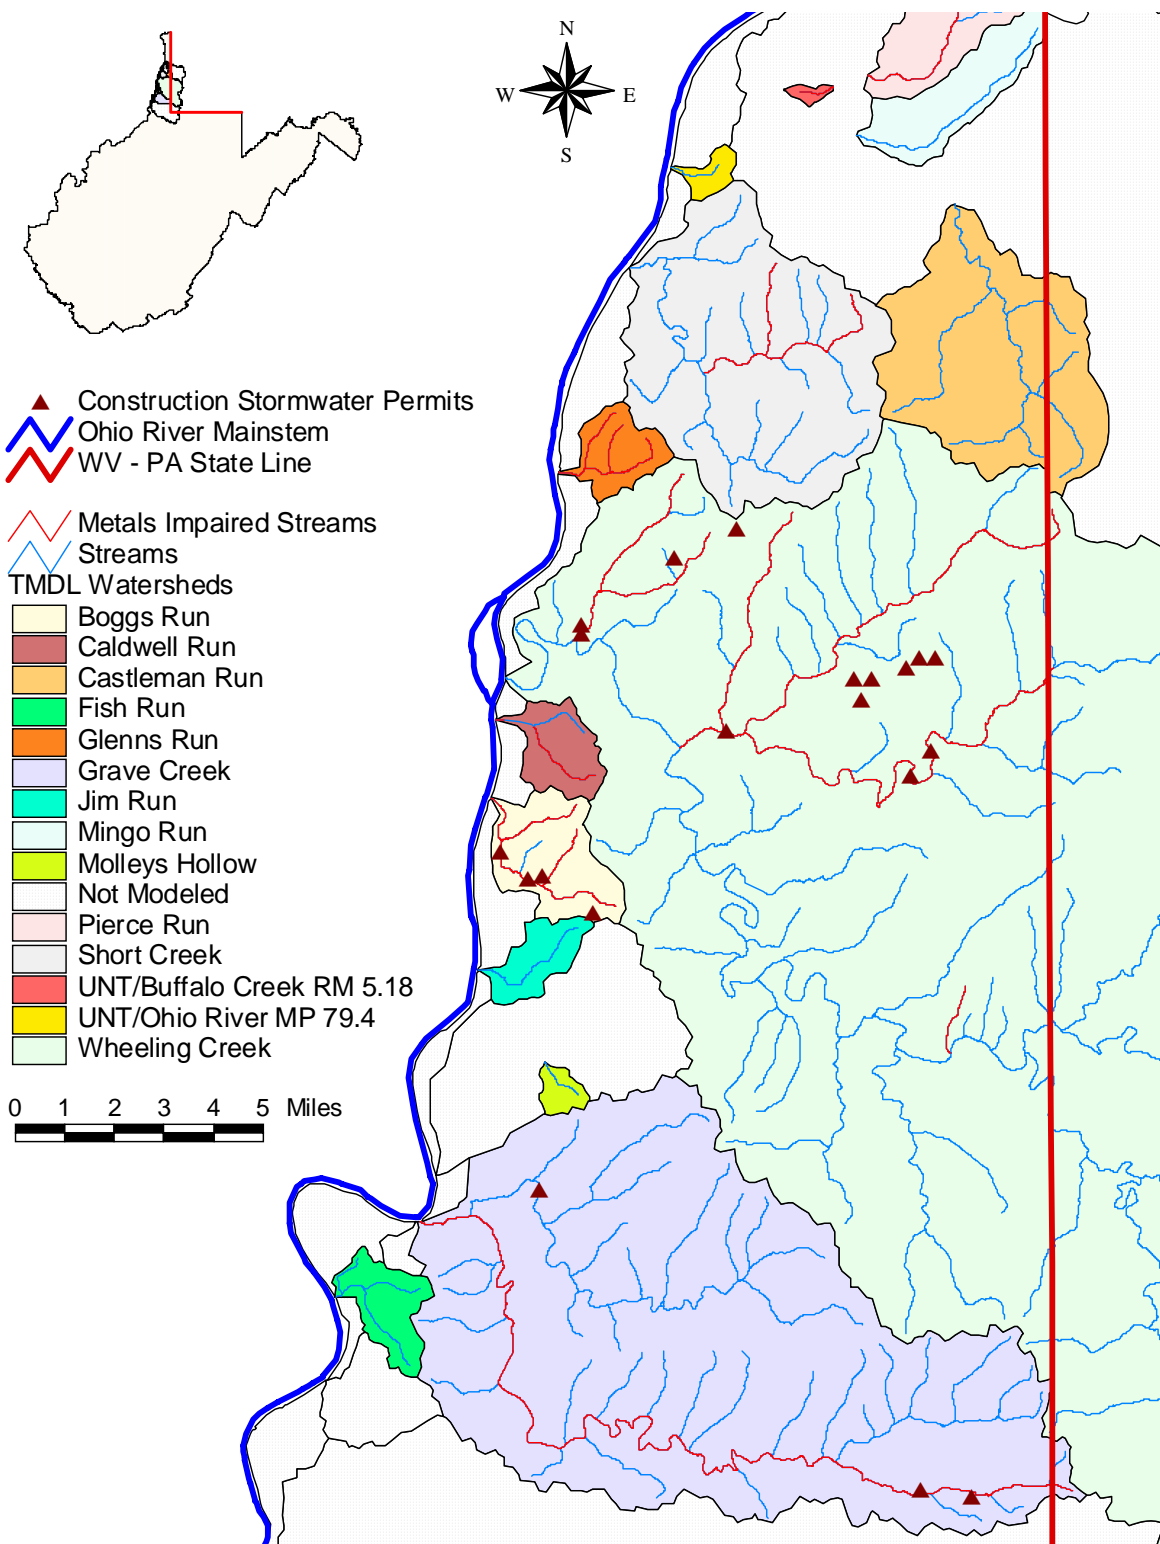

(Note: permits in close proximity appear to overlap in the figure)

Figure 5-2. Construction stormwater permits in the Upper Ohio South watershed

5.1.4 Municipal Separate Storm Sewer Systems (MS4)

Runoff from residential and urbanized areas during storm events can be a significant sediment source. USEPA's stormwater permitting regulations require public entities to obtain NPDES permit coverage for stormwater discharges from MS4s in specified urbanized areas. As such, their stormwater discharges are considered point sources and are prescribed wasteload allocations.

The Wheeling, West Virginia-Ohio urbanized area overlaps Upper Ohio South TMDL watersheds. Three municipalities and the West Virginia Division of Highways (DOH) own and operate MS4s. The City of Wheeling's MS4 is contained almost entirely within the Wheeling Creek and Caldwell Run watersheds. The City of Bethlehem's MS4 is approximately half within the Wheeling Creek watershed, and half within the Caldwell Run watershed. The City of Moundsville's MS4 area is mostly within the Grave Creek watershed, with a significant portion of the MS4 area falling outside watersheds for which TMDLs have been developed. DOH MS4 area occurs inside and on the periphery of the three cities listed above.

MS4 source representation was based upon precipitation and runoff from landuses determined from the modified NLCD 2001 landuse data, the jurisdictional boundary of the cities, and the transportation-related drainage areas for which DOH has MS4 responsibility. In certain areas, urban/residential stormwater runoff may drain to both CSO and MS4 systems. WVDEP consulted with local governments and obtained information to determine drainage areas to the respective systems and best represent MS4 pollutant loadings. The location and extent of the four MS4 jurisdictions are shown in Figure 5-3.

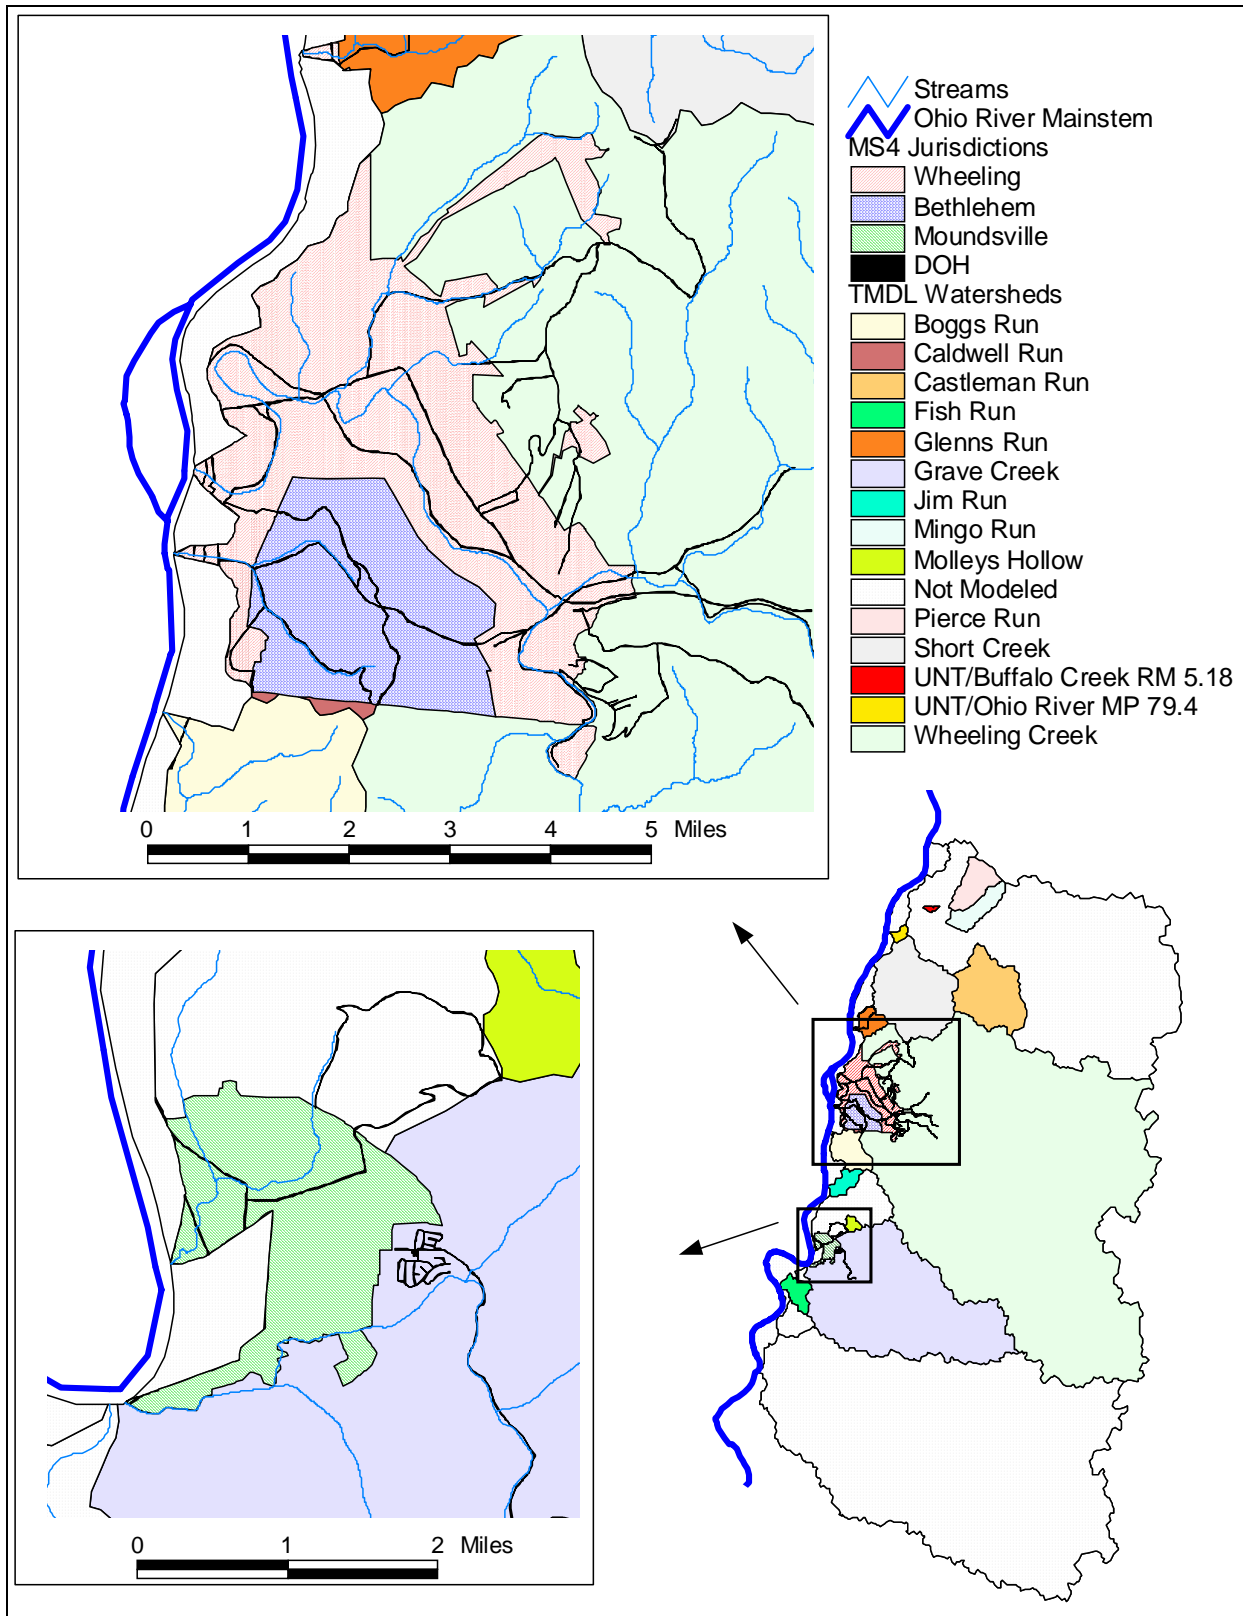


Figure 5-3. MS4 jurisdictions in the Upper Ohio South watershed

5.2 Metals Nonpoint Sources

In addition to point sources, nonpoint sources can contribute to water quality impairments related to metals. AML may contribute acid mine drainage (AMD), which produces low pH and high metals concentrations in surface and subsurface water. Similarly, facilities that were subject to the Surface Mining Control and Reclamation Act of 1977 (SMCRA, Public Law 95-87) during active operations and subsequently forfeited their bonds and abandoned operations can be a significant source of metals. Also, land disturbing activities that introduce excess sediment are considered nonpoint sources of metals.

5.2.1 Abandoned Mine Lands

WVDEP's Office of Abandoned Mine Lands & Reclamation (AML&R) was created in 1981 to manage the reclamation of lands and waters affected by mining prior to passage of SMCRA in 1977. AML&R's mission is to protect public health, safety, and property from past coal mining and to enhance the environment through the reclamation and restoration of land and water resources. The AML program is funded by a fee placed on coal mining. Allocations from the AML fund are made to state and tribal agencies through the congressional budgetary process.

The Office of AML&R identified locations of AML in the Upper Ohio South watershed from their records. In addition, source tracking efforts by WVDEP DWWM and AML&R identified additional AML sources (discharges, seeps, portals, and refuse piles). Field data, such as GPS locations, water samples, and flow measurements, were collected to represent these sources and characterize their impact on water quality. Based on this work, AML represent a significant source of metals in certain metals impaired streams for which TMDLs are presented. In TMDL watersheds with metals impairments, a total of 60.1 acres of AML area, 10 AML seeps, and 0.3 miles (2.4 acres) of highwall were incorporated into the TMDL model (Figure 5-4). The remaining 392.7 acres of AML area, as referenced in Table 3-1, are located in watersheds which are not metals impaired.

5.2.2 SMCRA Bond Forfeiture Sites

Mining permittees are required to post a performance bond to ensure the completion of reclamation requirements. When a bond is forfeited, WVDEP assumes the responsibility for the reclamation requirements. The Office of Special Reclamation in WVDEP's Division of Land Restoration provided bond forfeiture site locations and information regarding the status of land reclamation and water treatment activities. Sites with unreclaimed land disturbance and unresolved water quality impacts were represented, as were sites with ongoing water treatment activities. There are no unreclaimed bond forfeiture sites located in the metals impaired TMDL watersheds.

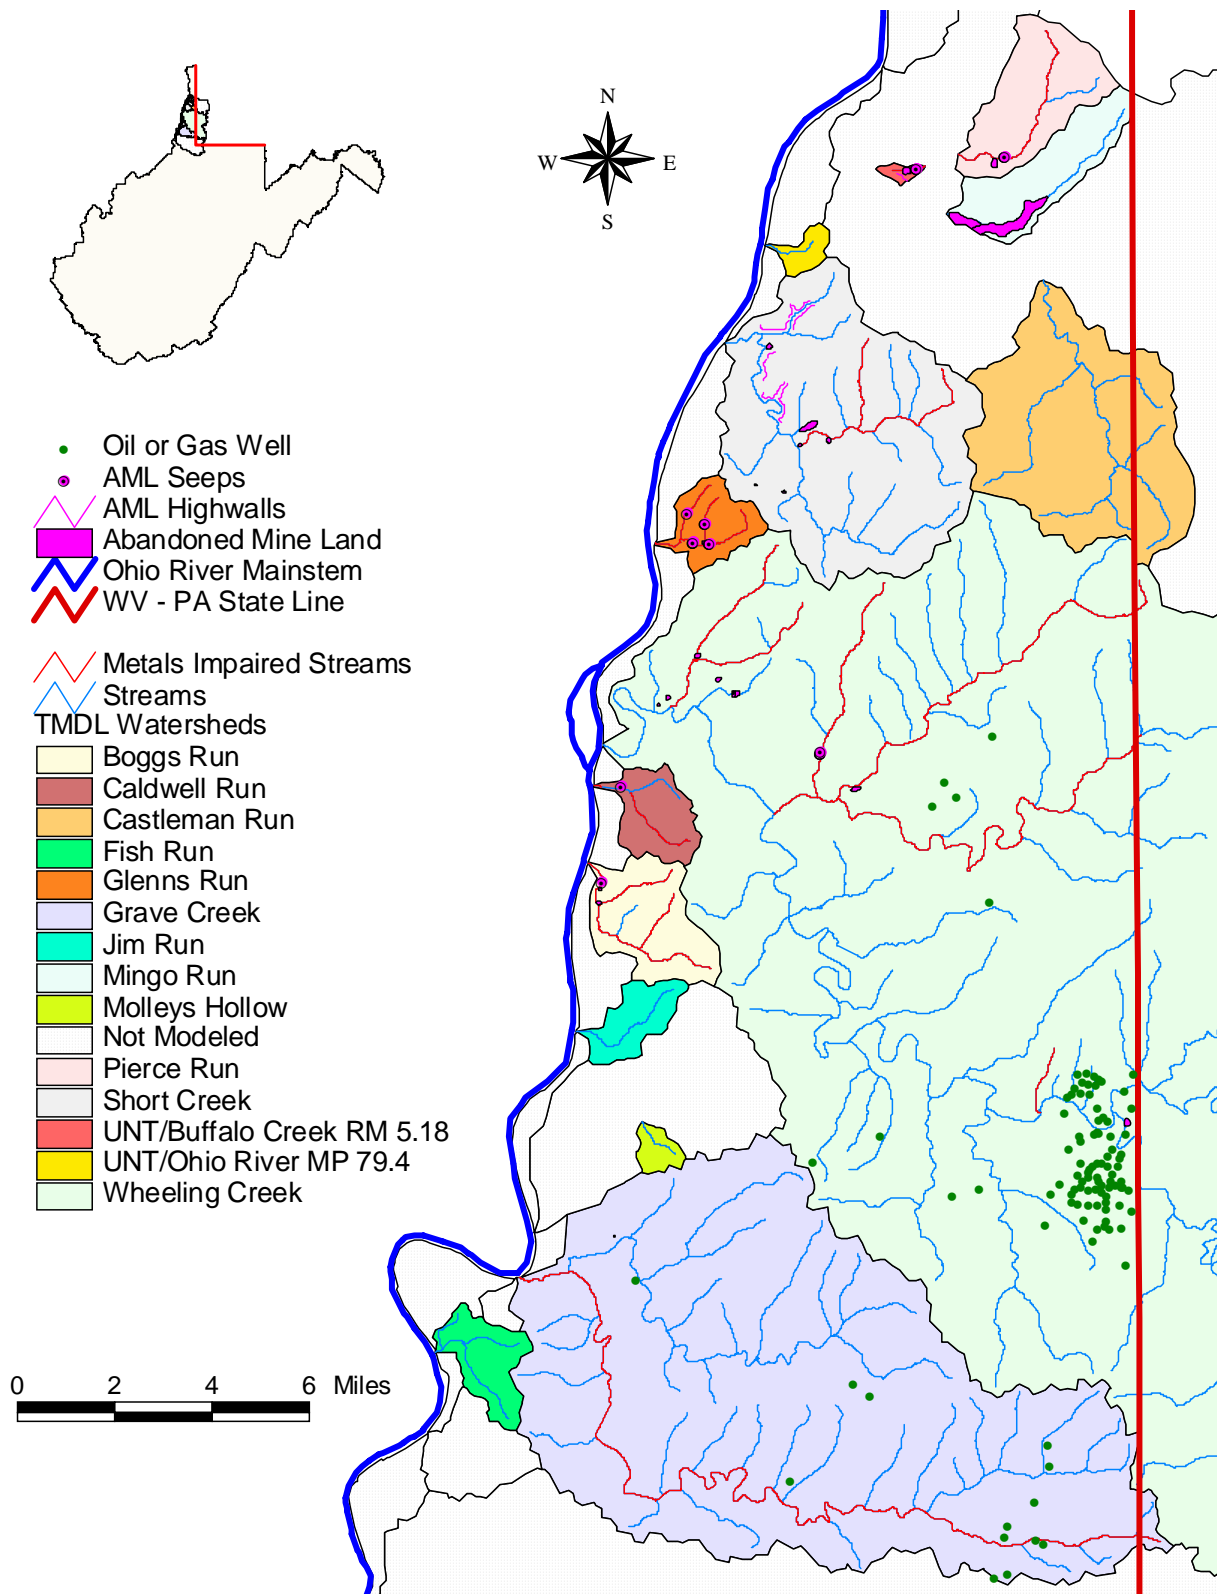


Figure 5-4. Metals non-point sources in the Upper Ohio South watershed

5.2.3 Sediment Sources

Land disturbance can increase sediment loading to impaired waters. The control of sediment-producing sources has been determined to be necessary to meet water quality criteria for total iron during high-flow conditions. Nonpoint sources of sediment include forestry operations, oil and gas operations, roads, agriculture, stormwater from construction sites less than one acre, and stormwater from urban and residential land in non-MS4 areas. Additionally, streambank erosion represents a significant sediment source throughout the watershed. Upland sediment nonpoint sources are summarized below.

Forestry

The West Virginia Bureau of Commerce's Division of Forestry provided information on forest industry sites (registered logging sites) in the metals impaired TMDL watersheds. This information included the harvested area (4,600 acres) and the subset of land disturbed by roads and landings (334 acres) for 110 registered logging sites, as well as 39.3 acres of burned forest, in the metals impaired TMDL watersheds.

West Virginia recognizes the water quality issues posed by sediment from logging sites. In 1992, the West Virginia Legislature passed the Logging Sediment Control Act. The act requires the use of best management practices (BMPs) to reduce sediment loads to nearby waterbodies. Without properly installed BMPs, logging and associated access roads can increase sediment loading to streams. According to the Division of Forestry, illicit logging operations represent approximately 2.5 percent of the total harvested forest area (registered logging sites) throughout West Virginia. These illicit operations do not have properly installed BMPs and can contribute sediment to streams. This rate of illicit activity has been represented in the model.

Oil and Gas

The WVDEP Office of Oil and Gas (OOG) is responsible for monitoring and regulating all actions related to the exploration, drilling, storage, and production of oil and natural gas in West Virginia. It maintains records on more than 40,000 active and 25,000 inactive oil and gas wells, and manages the Abandoned Well Plugging and Reclamation Program. The OOG also ensures that surface water and groundwater are protected from oil and gas activities.

Oil and gas data incorporated into the TMDL model were obtained from the WVDEP OOG GIS coverage. There are 104 active (152.5 acres) oil and gas wells in the metals impaired TMDL watersheds addressed in this report. Runoff from unpaved access roads to these wells and the disturbed areas around the wells contribute sediment to adjacent streams (Figure 5-4).

Roads

Heightened stormwater runoff from paved roads (impervious surface) can increase erosion potential. Unpaved roads can contribute sediment through precipitation-driven runoff. Roads that traverse stream paths elevate the potential for direct deposition of sediment. Road construction and repair can further increase sediment loads if BMPs are not properly employed.

Information on roads was obtained from various sources, including the 2000 TIGER/Line shapefiles from the U.S. Census Bureau and the WV Roads GIS coverage prepared by WVU.

Unpaved roads that were not included in either GIS coverage were digitized from topographic maps.

Agriculture

Agricultural activities can contribute sediment loads to nearby streams. While agricultural landuses account for approximately 7.4 percent of the modeled land area in metals impaired TMDL watersheds, source tracking information shows minimal upland loading impact from these sources. Sedimentation/iron impacts from agricultural landuses are indirectly reflected in the streambank erosion allocations.

Streambank Erosion

Streambank erosion has been determined to be a significant sediment source. The sediment loading from bank erosion is considered a nonpoint source and LAs are assigned. The streambank erosion modeling process is discussed in Section 8.1.3.

Other Land-Disturbance Activities

Stormwater runoff from residential and urban landuses in non-MS4 areas is a significant source of sediment in parts of the watershed. Outside urbanized area boundaries, these landuses are considered to be nonpoint sources and load allocations are prescribed. The modified NLCD2001 landuse data were used to determine the extent of residential and urban areas not subject to MS4 permitting requirements and source representation was based upon precipitation and runoff.

The NLCD 2001 landuse data also classifies certain areas as “barren” land. In the model configuration process, portions of the barren landuse were reclassified to account for other known sources (abandoned mine lands, mining permits, etc.). The remainder is represented as a specific nonpoint source category in the model.

Construction activities disturbing less than one acre are not subject to construction stormwater permitting. While not specifically represented in the model, their impact is indirectly accounted for in the loading rates established for the urban/residential landuse category.

6.0 PH SOURCES

The only low-pH impairment identified in the watershed occurs in Glens Run, which is also impaired pursuant to iron, manganese and aluminum water quality criteria and is biologically impaired. All impairments are primarily associated with AML sources. Because of the complex chemical interactions that occur between dissolved metals and acidity, the TMDL approach focused on reducing metals concentrations to meet metals water quality criteria and then verifying that the resultant pH associated with the metals TMDL condition would be in compliance with pH criteria.

7.0 CHLORIDE SOURCES

Permitted discharges associated with mining activities are the most prevalent point sources in regard to the chloride impairments in the watershed. WVDEP's Division of Mining and Reclamation (DMR) provided a spatial coverage of the mining-related NPDES permit outlets and additional information regarding the subset of those outlets for which chloride has been determined to be a pollutant of concern. The discharge characteristics, related permit limits and discharge data for these NPDES outlets were acquired from West Virginia's ERIS database system. Many of the permits include effluent limitations for chloride that require the attainment of the chronic aquatic life protection criterion end-of-pipe. Using this information, the mining point sources were then represented in the model and assigned individual WLAs for chloride. There are 3 permitted outlets discharging to chloride-impaired streams, as shown in Figure 7-1. All are high-volume pumped discharges.

In addition to point sources, non point sources can contribute to water quality impairments related to chloride. Nonpoint chloride sources include road de-icing, commercial and industrial de-icing, and fertilizer application, with the primary source being road salt and salt substitutes applied to the dense network of local roads and county and state highways in the watershed. Chloride loadings from non point sources are background sources in the watershed. Their representation was based upon precipitation and chloride water quality monitoring at various locations in the watershed not influenced by chloride point sources. In the absence of chloride point sources, those existing non point sources have not caused water quality criteria exceedances.

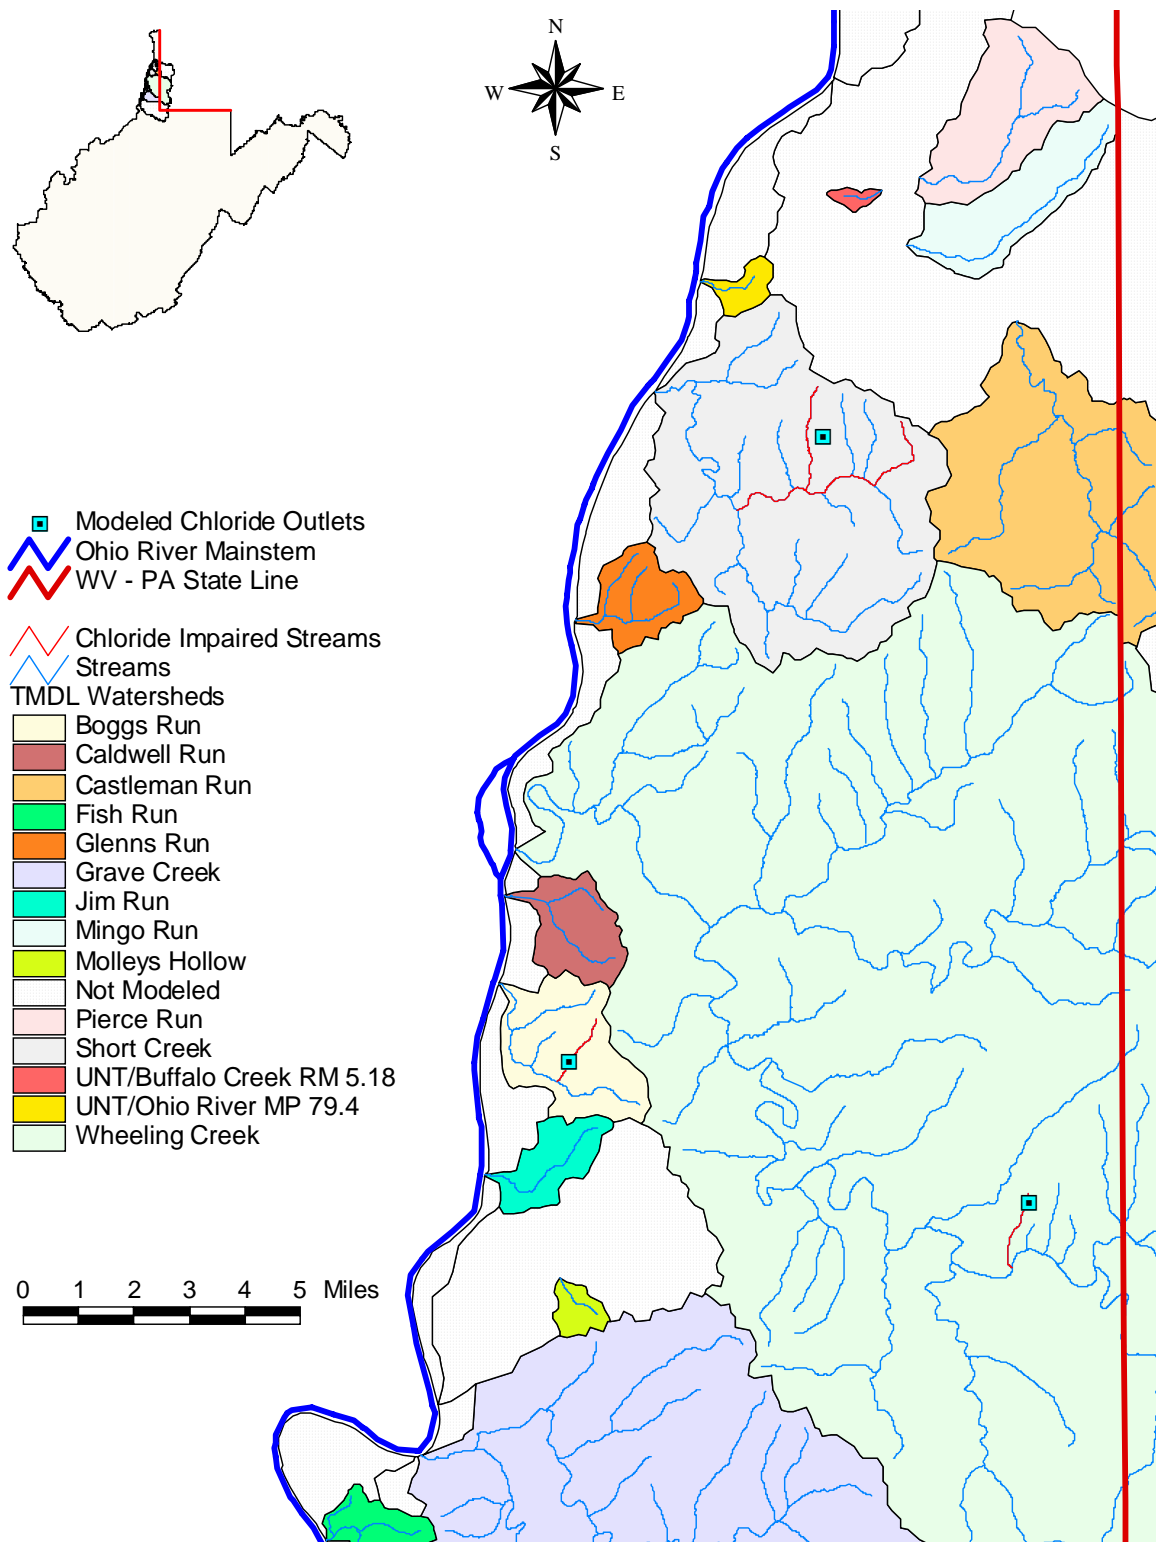


Figure 7-1. Chloride point sources in the Upper Ohio South watershed

8.0 FECAL COLIFORM SOURCE ASSESSMENT

8.1 Fecal Coliform Point Sources

Publicly and privately owned sewage treatment facilities and home aeration units are point sources of fecal coliform bacteria. Combined sewer overflows (CSOs) and discharges from MS4s are additional point sources that may contribute loadings of fecal coliform bacteria to receiving streams. The following sections discuss the specific types of fecal coliform point sources that were identified in the Upper Ohio South watershed.

8.1.1 Individual NPDES Permits

WVDEP issues individual NPDES permits to both publicly owned and privately owned wastewater treatment facilities. Publicly owned treatment works (POTWs) are relatively large facilities with extensive wastewater collection systems, whereas private facilities are usually used in smaller applications such as subdivisions and shopping centers.

In the subject watersheds of this report, one individually permitted POTW (City of Cameron) discharges treated effluent at one outlet. One additional privately owned sewage treatment plant (New Vrindaban Community) operating under an individual NPDES permit discharges treated effluent at one outlet. Mining bathhouse facilities discharge to three outlets in the Upper Ohio South TMDL watersheds.

These sources are regulated by NPDES permits that require effluent disinfection and compliance with strict fecal coliform effluent limitations (200 counts/100 mL [monthly geometric mean] and 400 counts/100 mL [maximum daily]). Compliant facilities do not cause fecal coliform bacteria impairments because effluent limitations are more stringent than water quality criteria.

8.1.2 Overflows

CSOs are outfalls from POTW sewer systems that carry untreated domestic waste and surface runoff. CSOs are permitted to discharge only during precipitation events. Sanitary sewer overflows (SSOs) are unpermitted overflows that occur as a result of excess inflow and/or infiltration to POTW separate sanitary collection systems. Both types of overflows contain fecal coliform bacteria. 67 CSO outlets in the subject watersheds are associated with the POTWs operated by the cities of Wheeling (59), Benwood (four), McMechen (one), and Moundsville (three). A significant SSO associated with the City of Cameron was also represented in the model.

8.1.3 Municipal Separate Storm Sewer Systems (MS4)

Runoff from residential and urbanized areas during storm events can be a significant fecal coliform source. USEPA's stormwater permitting regulations require public entities to obtain NPDES permit coverage for stormwater discharges from MS4s in specified urbanized areas. As such, MS4 stormwater discharges are considered point sources and are prescribed wasteload allocations.

MS4 entities and their areas of responsibility are described in Section 5.1.4 and displayed in Figure 5-3. MS4 source representation is based upon precipitation and runoff from landuses determined from the modified NLCD 2001 landuse data, the jurisdictional boundary of the cities, and the transportation-related drainage areas for which DOH has MS4 responsibility. In certain areas, urban/residential stormwater runoff may drain to both CSO and MS4 systems. WVDEP consulted with local governments and obtained information to determine drainage areas to the respective systems and best represent MS4 pollutant loadings.

8.1.4 General Sewage Permits

General sewage permits are designed to cover like discharges from numerous individual owners and facilities throughout the state. General Permit WV0103110 regulates small, privately owned sewage treatment plants (“package plants”) that have a design flow of less than 50,000 gallons per day (gpd). General Permit WV0107000 regulates HAUs. HAUs are small sewage treatment plants primarily used by individual residences where site considerations preclude typical septic tank and leach field installation. Both general permits contain fecal coliform effluent limitations identical to those in individual NPDES permits for sewage treatment facilities. In the areas draining to streams for which fecal coliform TMDLs have been developed, 30 facilities are registered under the “package plant” general permit and 27 are registered under the “HAU” general permit.

8.2 Fecal Coliform Nonpoint Sources

8.2.1 On-site Treatment Systems

Failing septic systems and straight pipes are significant nonpoint sources of fecal coliform bacteria. Information collected during source tracking efforts by WVDEP yielded an estimate of 23,000 homes that are not served by centralized sewage collection and treatment systems. Estimated septic system failure rates across the watershed range from three percent to 28 percent.

Due to a wide range of available literature values relating to the bacteria loading associated with failing septic systems, a customized Microsoft Excel spreadsheet tool was created to represent the fecal coliform bacteria contribution from failing on-site septic systems. WVDEP’s pre-TMDL monitoring and source tracking data were used in the calculations. To calculate loads, values for both wastewater flow and fecal coliform concentration are needed.

To calculate failing septic wastewater flows, the TMDL watersheds were divided into four septic failure zones. During the WVDEP source tracking process, septic failure zones were delineated by soil characteristics (soil permeability, depth to bedrock, depth to groundwater and drainage capacity) as shown in United States Department of Agriculture (USDA) county soil survey maps. Two types of failure were considered, complete failure and periodic failure. For the purposes of this analysis, complete failure was defined as 50 gallons per house per day of untreated sewage escaping a septic system as overland flow to receiving waters and periodic failure was defined as 25 gallons per house per day. Figure 8-1 shows the failing septic flows represented in the model by subwatershed.

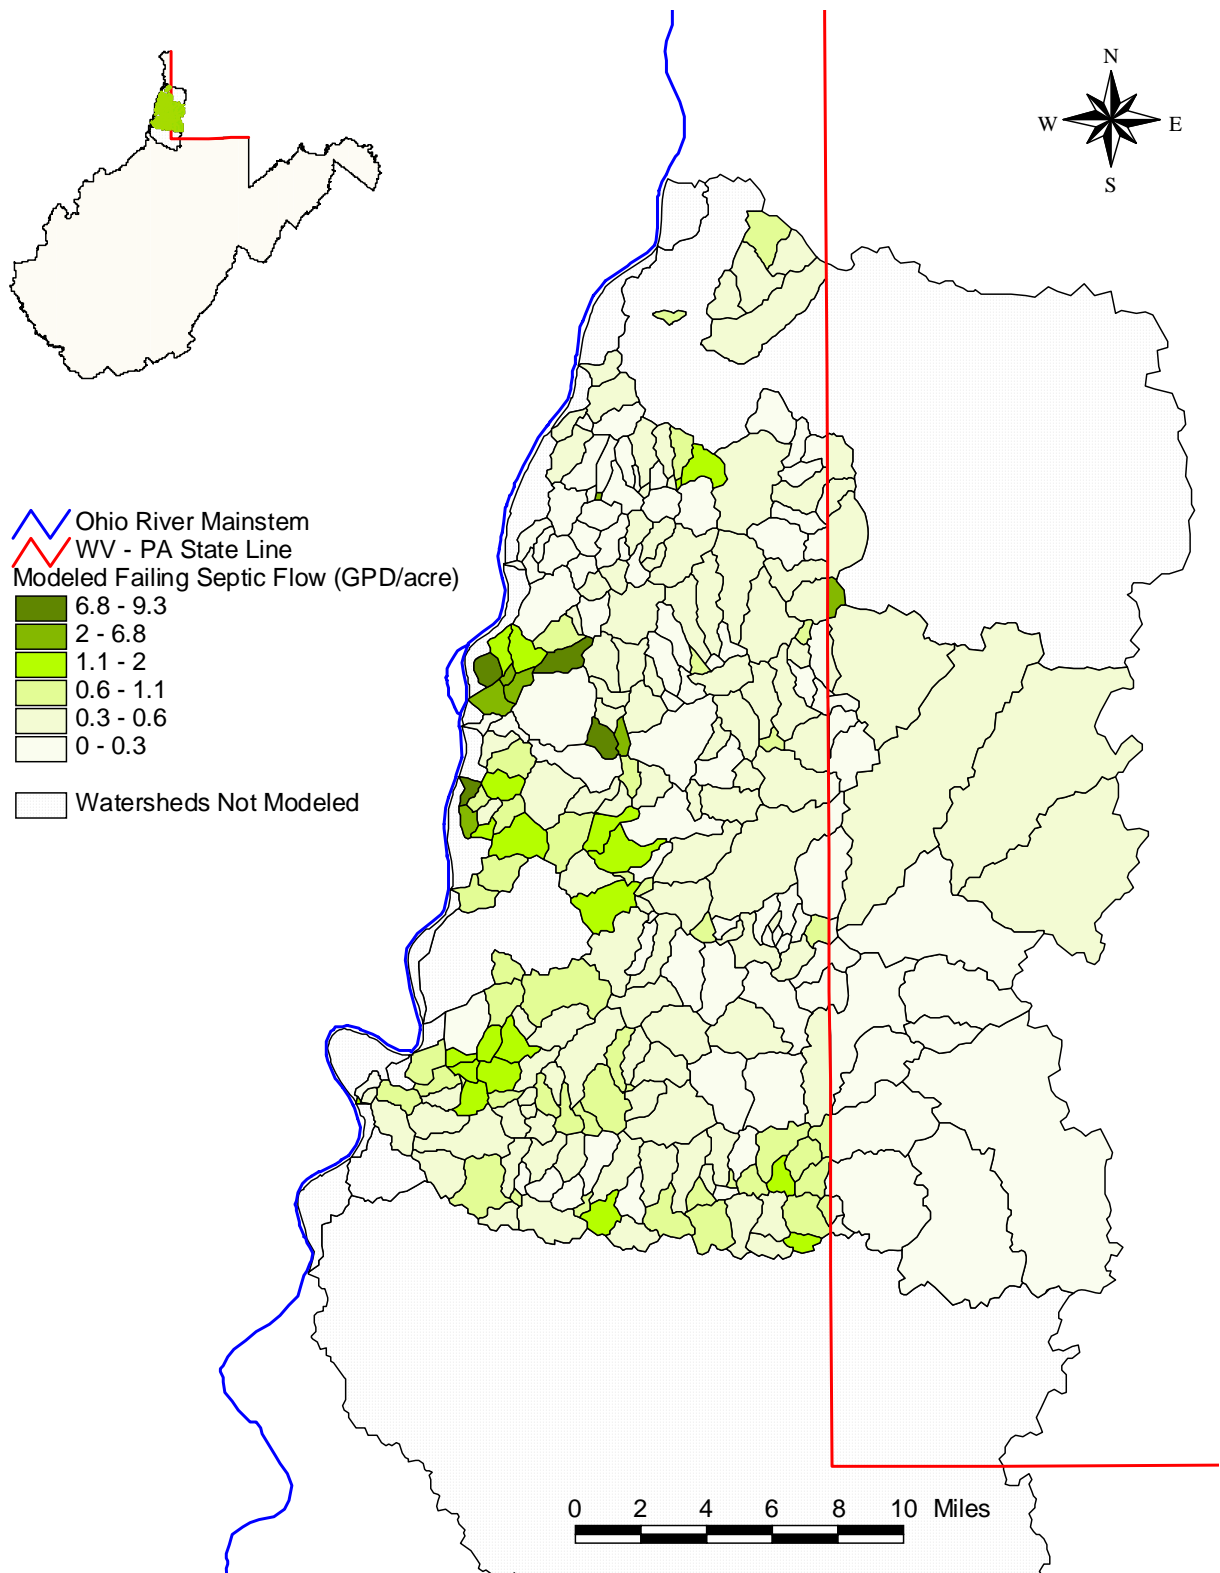


Figure 8-1. Failing septic flows in the Upper Ohio South watershed

Once failing septic flows were modeled, a fecal coliform concentration was determined at the TMDL watershed scale. Based on past experience with other West Virginia TMDLs, a base concentration of 10,000 counts per 100 ml was used as a beginning concentration for failing septic systems. This concentration was further refined during model calibration. A sensitivity analysis was performed by varying the modeled failing septic concentrations in multiple model runs, and then comparing model output to pre-TMDL monitoring data. Additional details of the failing septic analyses are elucidated in the Technical Report.

For the purposes of this TMDL, discharges from activities that do not have an associated NPDES permit, such as failing septic systems and straight pipes, are considered nonpoint sources. The decision to assign LAs to those sources does not reflect a determination by WVDEP or USEPA as to whether they are, in fact, non-permitted point source discharges. Likewise, by establishing these TMDLs with failing septic systems and straight pipes treated as nonpoint sources, WVDEP and USEPA are not determining that such discharges are exempt from NPDES permitting requirements.

8.2.2 Urban/Residential Runoff

Stormwater runoff from residential and urbanized areas that are not subject to MS4 permitting requirements can be a significant source of fecal coliform bacteria. These landuses are considered to be nonpoint sources and load allocations are prescribed. The modified NLCD 2001 landuse data were used to determine the extent of residential and urban areas not subject to MS4 permitting requirements and source representation was based upon precipitation and runoff.

8.2.3 Agriculture

Agricultural activities can contribute fecal coliform bacteria to receiving streams through surface runoff or direct deposition. Grazing livestock and land application of manure result in the deposition and accumulation of bacteria on land surfaces. These bacteria are then available for wash-off and transport during rain events. In addition, livestock with unrestricted access can deposit feces directly into streams.

Agricultural activity is a ubiquitous fecal coliform bacteria nonpoint source in the watershed. Pasture/cropland landuses were determined to be present in approximately 85% of the modeled subwatersheds. Source tracking efforts identified pastures and feedlots near impaired segments that have localized impacts on instream bacteria levels. Source representation was based upon precipitation and runoff, and source tracking information regarding number of livestock, proximity and access to stream, and overall runoff potential were used to develop accumulation rates.

8.2.4 Natural Background (Wildlife)

A certain “natural background” contribution of fecal coliform bacteria can be attributed to deposition by wildlife in forested areas. Accumulation rates for fecal coliform bacteria in forested areas were developed using reference numbers from past TMDLs, incorporating wildlife estimates obtained from West Virginia’s Division of Natural Resources (DNR). In addition, WVDEP conducted storm-sampling on a 100 percent forested subwatershed (Shrewsbury

Hollow) within the Kanawha State Forest, Kanawha County, West Virginia to determine wildlife contributions of fecal coliform. These results were used during the model calibration process. On the basis of the low fecal accumulation rates for forested areas, the storm water sampling results, and model simulations, wildlife is not considered to be a significant nonpoint source of fecal coliform bacteria in the watershed.

9.0 SEDIMENT SOURCE ASSESSMENT

Excess sediment has been identified as a significant stressor in relation to the biological impairments of a number of streams in the Upper Ohio South watershed. These waters are also impaired pursuant to the numerical water quality criteria for iron. In all of the subject waters, it was determined that the sediment reductions necessary to ensure attainment of the iron water quality criteria exceed those that would be needed to address biological impairment through a reasonably achievable sediment reference approach. Therefore, the iron TMDLs are an appropriate surrogate in place of sediment TMDLs. Sediment sources considered in the TMDL model are described in detail in Section 5.2.3.

10.0 MODELING PROCESS

Establishing the relationship between the instream water quality targets and source loadings is a critical component of TMDL development. It allows for the evaluation of management options that will achieve the desired source load reductions. The link can be established through a range of techniques, from qualitative assumptions based on sound scientific principles to sophisticated modeling techniques. Ideally, the linkage will be supported by monitoring data that allow the TMDL developer to associate certain waterbody responses with flow and loading conditions. This section presents the approach taken to develop the linkage between sources and instream response for TMDL development in the Upper Ohio South watershed.

10.1 Model Selection

Selection of the appropriate analytical technique for TMDL development was based on an evaluation of technical and regulatory criteria. The following key technical factors were considered in the selection process:

- Scale of analysis
- Point and nonpoint sources
- Metals and fecal coliform bacterial impairments are temporally variable and occur at low, average, and high flow conditions
- Dissolved aluminum impairments are related to pH water quality

- Total iron and total aluminum loadings and instream concentrations are related to sediment
- Time-variable aspects of land practices have a large effect on instream metals and bacteria concentrations
- Metals and bacteria transport mechanisms are highly variable and often weather-dependent
- Chloride concentrations are largely dependent on mining discharge practices (i.e. pumping) and discharges during low-flow stream conditions have the largest impact.

The primary regulatory factor that influenced the selection process was West Virginia's water quality criteria. According to 40 CFR Part 130, TMDLs must be designed to implement applicable water quality standards. The applicable water quality criteria for iron, aluminum, chloride, manganese, pH, and fecal coliform bacteria in West Virginia are presented in Section 2, Table 2-1. West Virginia numeric water quality criteria are applicable at all stream flows greater than the 7-day, 10-year low flow (7Q10). The approach or modeling technique must permit representation of instream concentrations under a variety of flow conditions to evaluate critical flow periods for comparison with criteria.

The TMDL development approach must also consider the dominant processes affecting pollutant loadings and instream fate. In the Upper Ohio South watershed, an array of point and nonpoint sources contributes to the various impairments. Most nonpoint sources are rainfall-driven with pollutant loadings primarily related to surface runoff, but some, such as AML seeps and inadequate onsite residential sewage treatment systems, function as continuous discharges. Similarly, certain point sources are precipitation-induced while others are continuous discharges. While loading function variations must be recognized in the representation of the various sources, the TMDL allocation process must prescribe WLAs for all contributing point sources and LAs for all contributing nonpoint sources.

The MDAS was developed specifically for TMDL application in West Virginia to facilitate large scale, data intensive watershed modeling applications. The MDAS is a system designed to support TMDL development for areas affected by nonpoint and point sources. The MDAS component most critical to TMDL development is the dynamic watershed model because it provides the linkage between source contributions and instream response. The MDAS is used to simulate watershed hydrology and pollutant transport as well as stream hydraulics and instream water quality. It is capable of simulating different flow regimes and pollutant loading variations. A key advantage of the MDAS' development framework is that it has no inherent limitations in terms of modeling size or upper limit of model operations. In addition, the MDAS model allows for seamless integration with modern-day, widely available software such as Microsoft Access and Excel. Sediment, total iron, dissolved aluminum, pH, total manganese, chloride, and fecal coliform bacteria were modeled using the MDAS.

10.2 Model Setup

Model setup consisted of configuring the following five separate MDAS models: iron/sediment, aluminum/pH, manganese, chloride, and fecal coliform bacteria.

10.2.1 General MDAS Configuration

Configuration of the MDAS model involved subdividing the TMDL watersheds into subwatershed modeling units connected by stream reaches. Physical characteristics of the subwatersheds, weather data, landuse information, continuous discharges, and stream data were used as input. Flow and water quality were continuously simulated on an hourly time-step.

The 14 TMDL watersheds were broken into 282 separate subwatershed units, based on the groupings of impaired streams shown in Figure 10-1. The TMDL watersheds were divided to allow evaluation of water quality and flow at pre-TMDL monitoring stations. This subdivision process also ensures a proper stream network configuration within the basin.

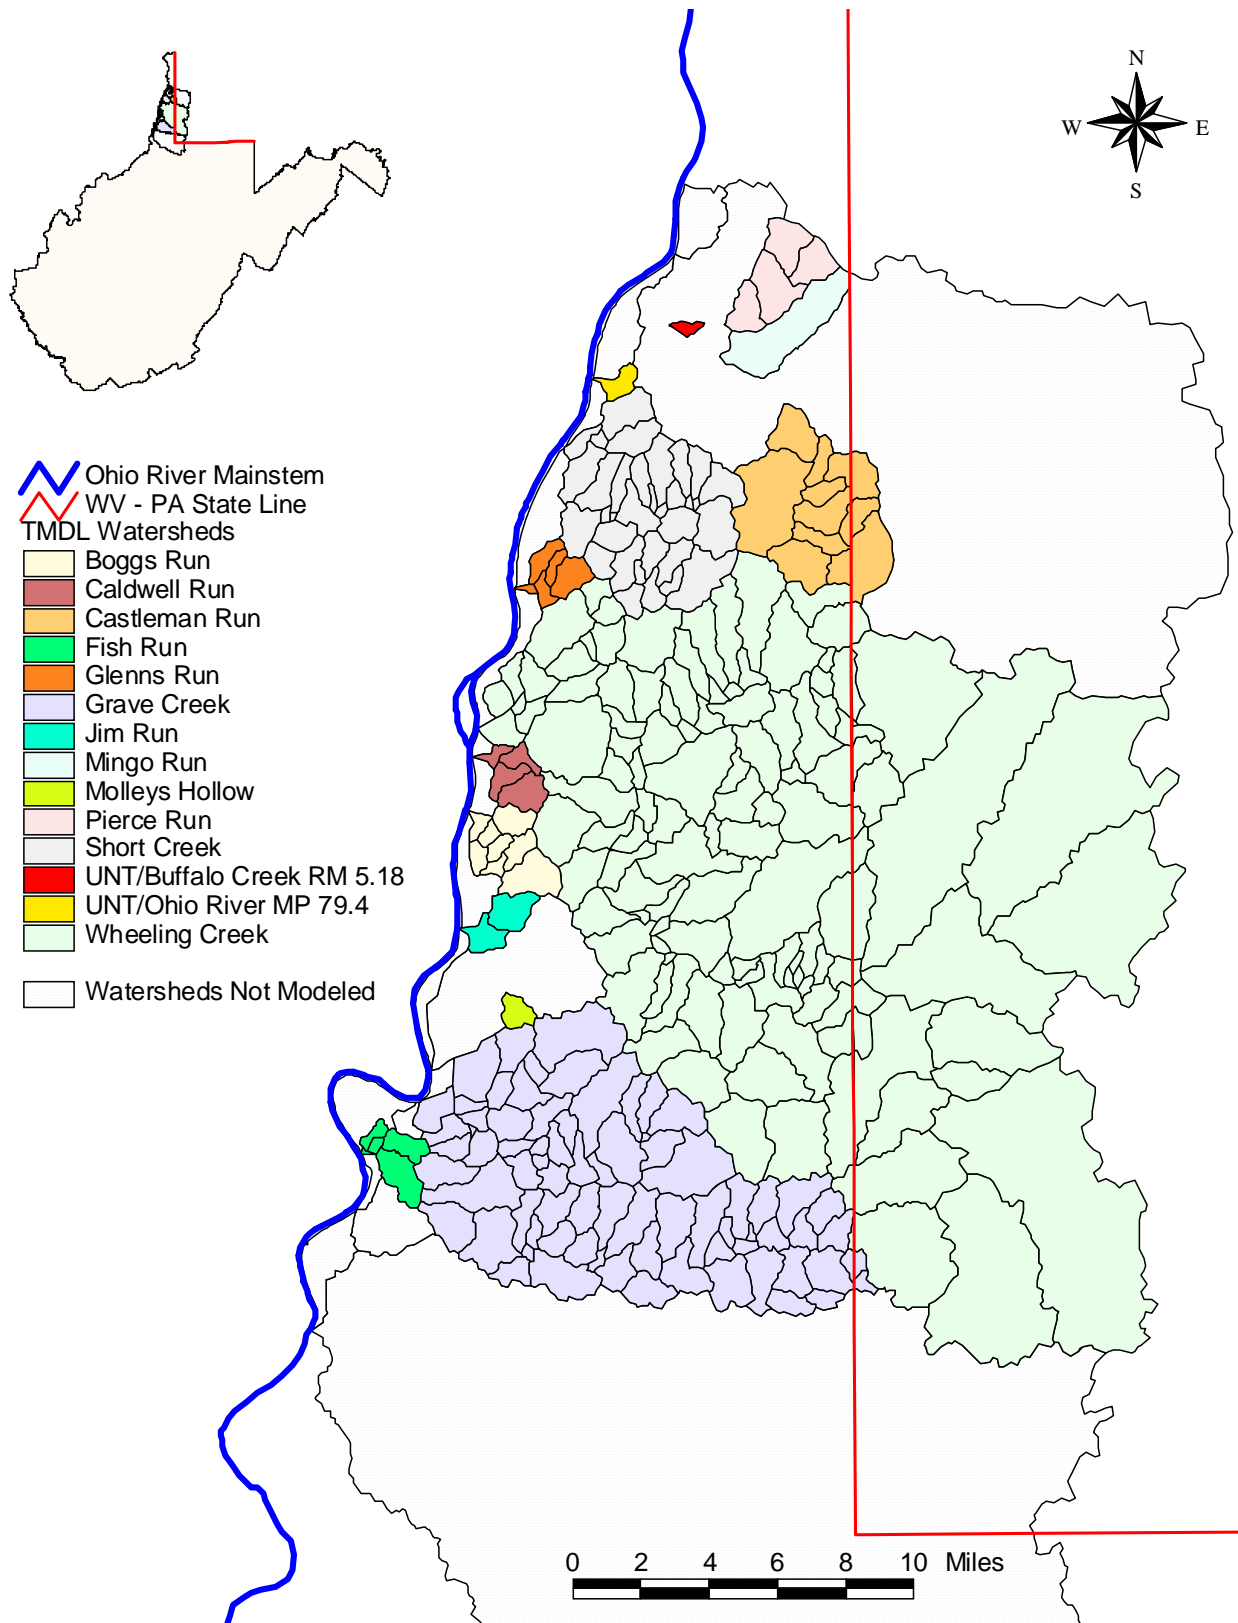


Figure 10-1. 14 TMDL watersheds and subwatershed delineation

10.2.2 Iron and Sediment Configuration

The modeled landuse categories contributing metals via precipitation and runoff include forest, pasture, cropland, wetlands, barren, residential/urban impervious, and residential/urban pervious. These sources were represented explicitly by consolidating existing NLCD 2001 landuse categories to create modeled landuse groupings. Several additional landuse categories were created to account for landuses either not included in the NLCD 2001 and/or representing recent land disturbance activities (i.e. abandoned mine lands, harvested forest and skid roads, oil and gas operations, paved and unpaved roads, and active mining). The process of consolidating and updating the modeled landuses is explained in further detail in the Technical Report. In addition, non-sediment related iron and aluminum land-based sources were modeled using representative average concentrations for the surface, interflow and groundwater portions of the water budget. Other sources, such as AML seeps identified by WVDEP's source tracking efforts, and mining pumped discharges were modeled as direct, continuous-flow sources in the model.

Sediment-producing landuses and bank erosion are sources of iron and aluminum because these metals are associated with sediment. Statistical analyses using pre-TMDL monitoring data collected in the TMDL watersheds were performed to establish the correlation between sediment and metals concentrations and to evaluate the spatial variability of this correlation. The results were then applied to the sediment from sediment-producing landuses and bank erosion to calculate the iron and aluminum loads delivered to the streams. Generation of sediment depends on the intensity of surface runoff. It also varies by landuse and the characteristics of the land. Sediment delivery paths modeled were surface runoff erosion, and streambank erosion. Surface sediment sources were modeled using average sediment runoff concentrations by landuse. These concentrations were applied to the corresponding surface runoff flows. Bank erosion was modeled as a rate per unit area of submerged erodible area. Bank erosion will only happen after a critical flow is reached, and as the flow increases, so does the bank erosion yield. Sediment produced during bank erosion episodes is also dependent on the stability of the banks, as defined by the total bank stability score.

The relevant parameters in the bank-erosion algorithms are the threshold flow at which bank erosion starts to occur, and a coefficient for scour of the bank matrix soil for the reach. The threshold flow at which bank erosion starts to occur was estimated as the flow that occurs at bank-full depth. The coefficient for scour of the bank matrix soil was a direct function of the reach's stability factor (S-value).

The MDAS bank erosion model takes into account stream flow and bank stability. The bank erosion rate per unit area was defined as a function of: bank flow volume above a specified threshold and the bank erodible area. Each stream segment had a flow threshold above which streambank erosion occurred. The bank scouring process is a power function dependent on high-flow events, defined as exceeding the flow threshold. The coefficient of scour for the bank soil was related to the Bank Stability Index. Streambank erosion was modeled as a unique sediment source independent of other upland-associated erosion sources.

The wetted perimeter and reach length represent ground area covered by water (Figure 10-3). The erodible wetted perimeter is equal to the difference between the actual wetted perimeter and wetted perimeter during threshold flow conditions. The bank erosion rate per unit area was multiplied by the erodible perimeter and the reach length to obtain an estimate of sediment mass

eroded corresponding to the stream segment. The Technical Report provides more detailed discussions on the technical approaches used for sediment modeling.

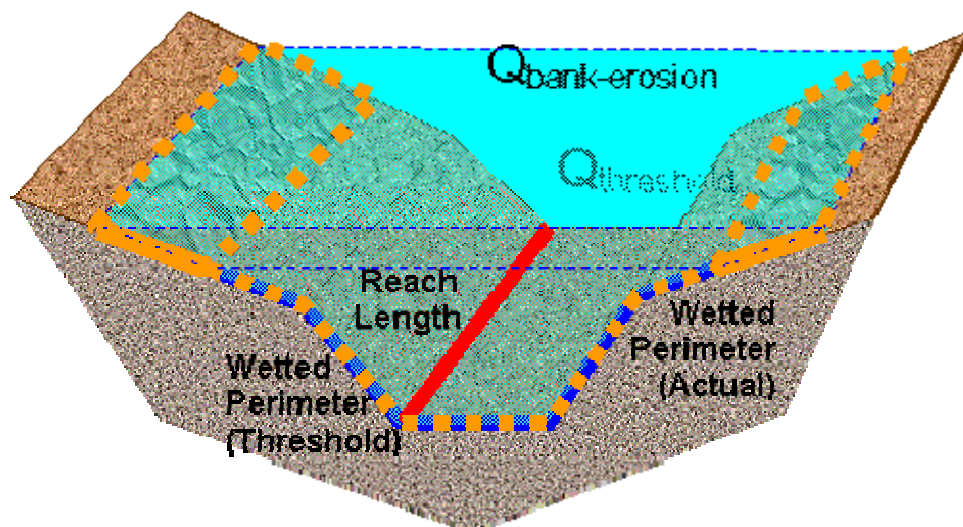


Figure 10-3. Conceptual diagram of stream channel components used in the bank erosion model

10.2.3 Aluminum, Manganese and pH Configuration

Glenns Run is the only stream in the watershed that was determined to be impaired in relation to pH, manganese and dissolved aluminum water quality criteria. Those impairments of Glenns Run have been attributed solely to AML sources. Glenns Run is also impaired in relation to the total iron criterion with contributions from multiple sources, and an iron/sediment MDAS model was configured for Glenns Run as described in Section 10.2.2.

To derive the dissolved aluminum and pH TMDLs for Glenns Run, it was necessary to include additional MDAS modules capable of representing instream chemical reactions of several water quality components. MDAS includes a dynamic chemical species fate and transport module that simulates soil subsurface and in-stream water quality taking into account chemical species interaction and transformation. The total chemical concentration and flows time series generated by MDAS are used as inputs for the modules' pollutant transformation and transport routines. The modules simulate soil subsurface and in-stream chemical reactions, assuming instant mixing and concentrations equally distributed throughout soil and stream segments. The model supports major chemical reactions, including acid/base, complexation, precipitation, and dissolution reactions and some kinetic reactions, if selected by the user. The model selection process, modeling methodologies, and technical approaches are discussed further in the Technical Report.

AML seeps were modeled as direct, continuous-flow sources in the model. AML and other land-based sources were modeled using representative average concentrations for the surface, interflow and groundwater portions of the water budget.

Because of the complex chemical interactions that occur between dissolved metals and acidity, the TMDL approach focused on reducing metals concentrations, using the MDAS model previously described, to meet metals water quality criteria and then verifying that the resultant pH associated with the metals TMDL condition would be in compliance with pH criteria.

10.2.4 Chloride Configuration

Modeled landuse categories contributing chloride via surface runoff and groundwater recharge primarily include urban/residential areas and roads. These land-based sources were modeled using representative average concentrations for the surface, interflow and groundwater portions of the water budget. Initial loading rates were refined through calibration based upon pre-TMDL monitoring of streams that do not receive high chloride point source discharges. The point source discharges associated with mining activities were modeled as direct, continuous-flow sources in the model based upon effluent limitations and other available information obtained from the permitting database.

10.2.5 Fecal Coliform Configuration

Modeled landuse categories contributing bacteria via precipitation and runoff include pasture, cropland, urban/residential pervious lands, urban/residential impervious lands, grassland, forest, barren land, and wetlands. Other sources, such as failing septic systems, straight pipes, and discharges from sewage treatment facilities, were modeled as direct, continuous-flow sources in the model.

The basis for the initial bacteria loading rates for landuses and direct sources is described in the Technical Report. The initial estimates were further refined during the model calibration. A variety of modeling tools were used to develop the fecal coliform bacteria TMDLs, including the MDAS, and a customized spreadsheet to determine the fecal loading from failing residential septic systems identified during source tracking efforts by the WVDEP. Section 8.2.1 describes the process of assigning flow and fecal coliform concentrations to failing septic systems.

10.3 Hydrology Calibration

Hydrology and water quality calibration were performed in sequence because water quality modeling is dependent on an accurate hydrology simulation. Typically, hydrology calibration involves a comparison of model results with instream flow observations from USGS flow gauging stations throughout the watershed. USGS gauging station 03112000 Wheeling Creek at Elm Grove, WV was the only USGS flow gauging station in the Upper Ohio South watershed with adequate data records for hydrology calibration.

Hydrology calibration was based on observed data from that station and the landuses present in the watersheds from January 1, 2003 to October 31, 2006. Key considerations for hydrology calibration included the overall water balance, the high- and low-flow distribution, storm flows, and seasonal variation. The hydrology was validated for the time period of January 1, 1994 to October 31, 2006. As a starting point, many of the hydrology calibration parameters originated from the USGS Scientific Investigations Report 2005-5099 (Atkins, 2005). Final adjustments to

model hydrology were based on flow measurements obtained during WVDEP's pre-TMDL monitoring in the Upper Ohio South watershed. A detailed description of the hydrology calibration and a summary of the results and validation are presented in the Technical Report.

10.4 Water Quality Calibration

After the model was configured and calibrated for hydrology, the next step was to perform water quality calibration for the subject pollutants. The goal of water quality calibration was to refine model parameter values to reflect the unique characteristics of the watershed so that model output would predict field conditions as closely as possible. Both spatial and temporal aspects were evaluated through the calibration process.

The water quality was calibrated by comparing modeled versus observed pollutant concentrations. The water quality calibration consisted of executing the MDAS model, comparing the model results to available observations, and adjusting water quality parameters within reasonable ranges. Initial model parameters for the various pollutant parameters were derived from previous West Virginia TMDL studies, storm sampling efforts, and literature values. Available monitoring data in the watershed were identified and assessed for application to calibration. Monitoring stations with observations that represented a range of hydrologic conditions, source types, and pollutants were selected. The time-period for water quality calibration was selected based on the availability of the observed data and their relevance to the current conditions in the watershed.

WVDEP also conducted storm monitoring on Shrewsbury Hollow in Kanawha State Forest, Kanawha County, West Virginia. The data gathered during this sampling episode was used in the calibration of fecal coliform and to enhance the representation of background conditions from undisturbed areas. The results of the storm sampling fecal coliform calibration are shown in Figure 10-2.

Sediment calibration consisted of adjusting the sediment surface runoff concentrations by landuse, and the coefficient of scour for bank-erosion. The water quality parameters that were adjusted to obtain a calibrated model for sediment were the sediment concentrations by landuse, and the magnitude of the coefficient of scour for bank-erosion. Calibration parameters that were relevant for the land-based sediment calibration were the sediment concentrations (in mg/L) for runoff, interflow, and groundwater. These concentrations were defined for each modeled landuse. Initial values for these parameters were based on available landuse-specific storm-sampling monitoring data. Initial values were adjusted so that the model's suspended solids output closely matched observed instream data in watersheds with predominately one type of source.

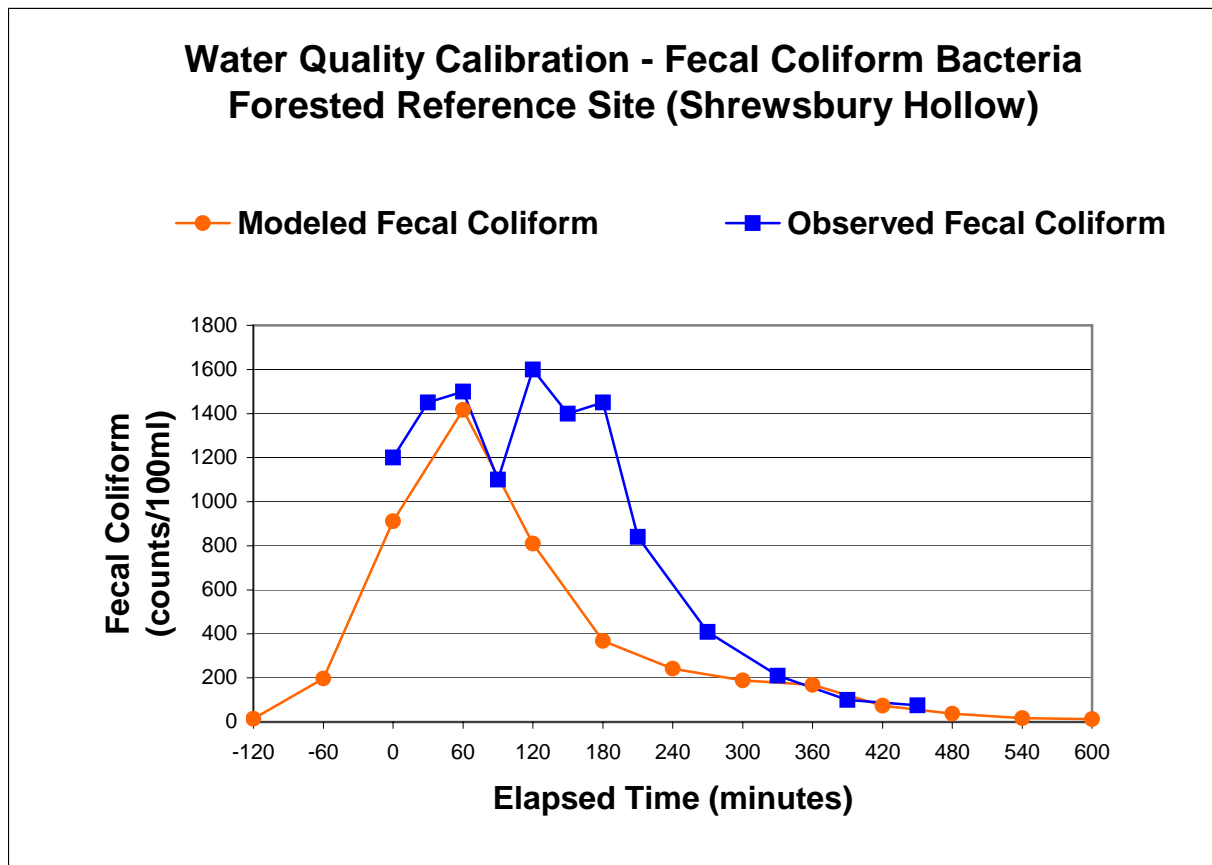


Figure 10-2. Shrewsbury Hollow fecal coliform observed data

10.5 Modeling Technique for Biological Impairments with Sedimentation Stressors

The SI process discussed in Section 4 indicated a need to reduce the contribution of excess sediment to some of the biologically impaired streams. Initially, a “reference watershed” TMDL development approach was pursued. The approach was based on selecting a non-impaired watershed that shares similar landuse, ecoregion, and geomorphologic characteristics with the impaired watershed. Stream conditions in the reference watershed are assumed to be representative of the conditions needed for the impaired streams to attain their designated uses, and the normalized loading associated with the reference stream is used as the TMDL endpoint for the impaired streams. Given these parameters and a non-impaired WVSCI score, Britt Run (WV-OUS-17-M) was selected as the reference watershed. The location of the reference watershed is shown in Figure 4-2.

All of the sediment-impaired streams exhibited impairments pursuant to total iron water quality criteria. Upon finalization of modeling based on the reference watershed approach, it was determined that sediment reductions necessary to ensure compliance with iron criteria are greater than those necessary to correct the biological impairments associated with sediment. As such, the iron TMDLs presented for the subject waters are appropriate surrogates for necessary sediment TMDLs. For affected streams, Table 10-1 contrasts the sediment reductions necessary to attain

iron criteria with those needed to resolve biological impairment under the reference watershed approach. Please refer to the Technical Report for details regarding the reference watershed approach.

Table 10-1. Sediment loadings using different modeling approaches

Stream Name	Stream Code	Allocated Sediment Load Iron TMDL (tons/yr)	Allocated Sediment Load Reference Approach (tons/yr)
Grave Creek	WV-OUS-10	2,582	5,070
North Fork/Grave Creek	WV-OUS-10-AC	970	1,980
Middle Grave Creek	WV-OUS-10-C	191	535
Boggs Run	WV-OUS-15	219	335
Browns Run	WV-OUS-15-A	79	79
Caldwell Run	WV-OUS-16	100	180
Long Run	WV-OUS-17-B	190	469
Waddles Run	WV-OUS-17-B-3	52	151
Pogue Run	WV-OUS-17-B-8	11	38
Peters Run	WV-OUS-17-H-1	193	420
Todd Run	WV-OUS-17-H-2-Q	46	93
Point Run	WV-OUS-17-H-7	59	95
Roneys Point Run	WV-OUS-17-H-8	24	76

10.6 Allocation Strategy

As explained in Section 2, a TMDL is composed of the sum of individual WLAs for point sources, LAs for nonpoint sources, and natural background levels. In addition, the TMDL must include a MOS, implicitly or explicitly, that accounts for the uncertainty in the relationship between pollutant loads and the quality of the receiving waterbody. TMDLs can be expressed in terms of mass per time or other appropriate units. Conceptually, this definition is denoted by the equation:

$$\text{TMDL} = \text{sum of WLAs} + \text{sum of LAs} + \text{MOS}$$

To develop the TMDLs for each of the impairments listed in Table 3-3 of this report, the following approach was taken:

- Define TMDL endpoints
- Simulate baseline conditions
- Assess source loading alternatives
- Determine the TMDL and source allocations

10.6.1 TMDL Endpoints

TMDL endpoints represent the water quality targets used to quantify TMDLs and their individual components. In general, West Virginia's numeric water quality criteria for the subject pollutants and an explicit five percent MOS were used to identify endpoints for TMDL development.

The five percent explicit MOS was used to counter uncertainty in the modeling process. Long-term water quality monitoring data were used for model calibration. Although these data represented actual conditions, they were not of a continuous time series and might not have captured the full range of instream conditions that occurred during the simulation period. The explicit five percent MOS also accounts for those cases where monitoring might not have captured the full range of instream conditions. The TMDL endpoints for the various criteria are displayed in Table 8-2.

An explicit margin of safety was not included for chloride because little modeling uncertainty exists. Nonattainment is directly related to point sources regulated by WV/NPDES permits and water quality criteria will be met if the problematic point sources achieve prescribed criteria end-of-pipe wasteload allocations.

Table 10-2. TMDL endpoints

Water Quality Criterion	Designated Use	Criterion Value	TMDL Endpoint
Total Iron	Aquatic Life, warmwater fisheries	1.5 mg/L (4-day average)	1.425 mg/L (4-day average)
Total Iron	Aquatic Life, troutwaters	0.5 mg/L (4-day average)	0.475 mg/L (4-day average)
Dissolved Aluminum	Aquatic Life, warmwater fisheries	0.75 mg/L (1-hour average)	0.7125 mg/L (1-hour average)
Dissolved Aluminum	Aquatic Life, troutwaters	0.087 mg/L (4-day average)	0.0827 mg/L (4-day average)
Total Manganese	Public Water Supply	1.0 mg/L	0.95 mg/L
Chloride	Aquatic Life	230 mg/L (4-day average)	230 mg/L (4-day average)
pH	Aquatic Life	6.00 Standard Units (Minimum)	6.02 Standard Units (Minimum)
Fecal Coliform	Water Contact Recreation and Public Water Supply	200 counts / 100 mL (Monthly Geometric Mean)	190 counts / 100 mL (Monthly Geometric Mean)
Fecal Coliform	Water Contact Recreation and Public Water Supply	400 counts / 100 mL (Daily, 10% exceedance)	380 counts / 100 mL (Daily, 10% exceedance)

TMDLs are presented as average daily loads that were developed to meet TMDL endpoints under a range of conditions observed throughout the year. For most pollutants, analysis of available data indicated that critical conditions occur during both high- and low-flow events. To appropriately address the low- and high-flow critical conditions, the TMDLs were developed using continuous simulation (modeling over a period of several years that captured precipitation extremes), which inherently considers seasonal hydrologic and source loading variability.

The water quality criteria for pH allow no values below 6.0 or above 9.0. With respect to AMD, pH is not a good indicator of the acidity in a waterbody and can be a misleading characteristic.

Water with near-neutral pH (~ 7) but containing elevated concentrations of dissolved ferrous (Fe^{2+}) ions can become acidic after oxidation and precipitation of the iron (PADEP, 2000). Therefore, a more practical approach to meeting the water quality criteria for pH is to use the concentration of metal ions as a surrogate for pH. It was assumed that reducing instream metals (iron and aluminum) concentrations to meet water quality criteria (or TMDL endpoints) would result in meeting the water quality standard for pH. This assumption was verified by executing MDAS under TMDL conditions (where prescribed metals reductions are achieved) and comparing simulated results at all subwatershed outlets to the pH criteria. Additional details regarding the pH modeling approach are provided in the Technical Report.

10.6.2 Baseline Conditions and Source Loading Alternatives

The calibrated model provides the basis for performing the allocation analysis. The first step is to simulate baseline conditions, which represent existing nonpoint source loadings and point sources loadings at permit limits. Baseline conditions allow for an evaluation of instream water quality under the highest expected loading conditions.

Baseline Conditions for MDAS

The MDAS model was run for baseline conditions using hourly precipitation data for a representative six year simulation period (January 1, 1998 through December 31, 2003). The precipitation experienced over this period was applied to the landuses and pollutant sources as they existed at the time of TMDL development. Predicted instream concentrations were compared directly with the TMDL endpoints. This comparison allowed for the evaluation of the magnitude and frequency of exceedances under a range of hydrologic and environmental conditions, including dry periods, wet periods, and average periods. Figure 10-4 presents the annual rainfall totals for the years 1990 through 2006 at the Washington 3 NE (PA9318) weather station in Pennsylvania. The years 1998 to 2003 are highlighted to indicate the range of precipitation conditions used for TMDL development in the Upper Ohio South watershed.

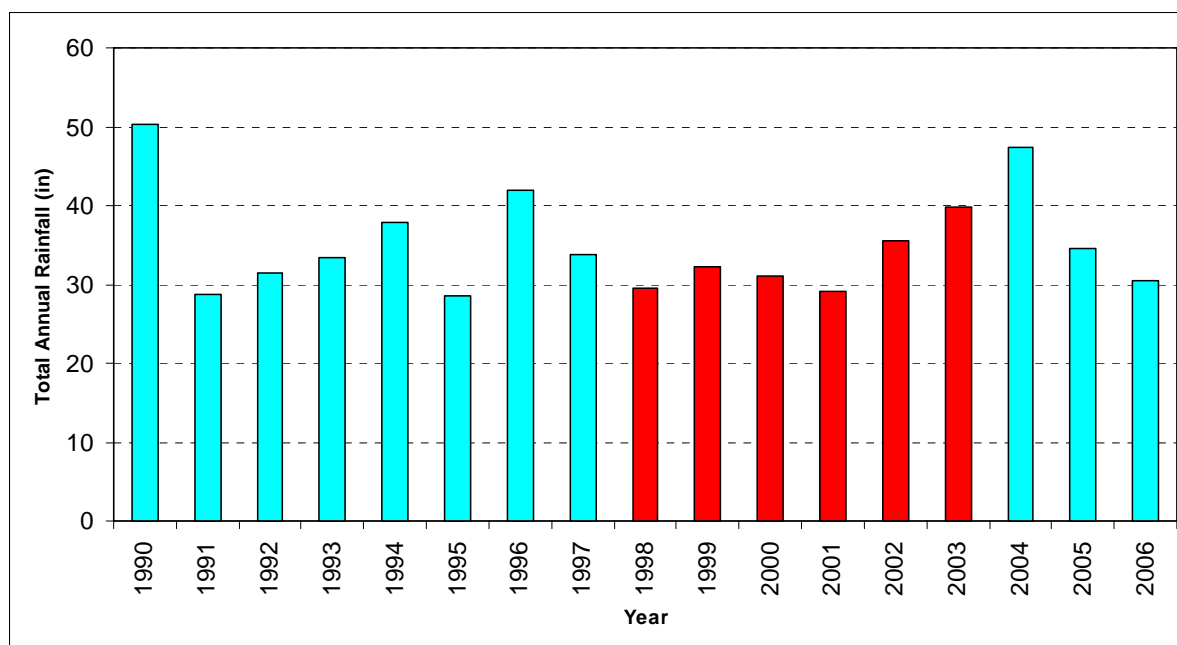


Figure 10-4. Annual precipitation totals for the Washington 3 NE (PA 9318) weather station

Mining discharges that are influenced by precipitation were represented during baseline conditions using precipitation, drainage area and applicable effluent limitations. For non-precipitation-induced mining discharges, available flow and/or pump capacity information was used in conjunction with applicable effluent limitations. The metals and chloride concentrations associated with common effluent limitations are presented in Table 10-3. The concentrations displayed in Table 10-3 accurately represent existing wasteload allocations for the majority of mining discharges. In the limited instances where existing effluent limitations vary from the displayed values, the outlets were represented at next higher condition. For example, existing iron effluent limits between 1.5 and 3.2 mg/L were represented at 3.2 mg/L.

Table 10-3. Concentrations used in representing permitted conditions for active mining

Pollutant	Technology-based Permits	Water Quality-based Permits
Aluminum, total	0.86 mg/L (95 th percentile DMR values)	0.75 mg/L
Iron, total	3.2 mg/L	1.5 mg/L
Chloride	NA	230 mg/L

Certain non-mining discharges (stormwater associated with non-construction, industrial activity) were represented using precipitation, drainage area, and the stormwater benchmark iron value of 1.0 mg/L.

One percent of the total subwatershed area was generally allotted for concurrent construction activity under the Construction Stormwater General Permit. Baseline loadings were based upon precipitation and runoff and an assumption that proper installation and maintenance of required BMPs will achieve a TSS benchmark value of 100 mg/L.

Sediment producing nonpoint source and background loadings were represented using precipitation, drainage area, and the iron loading associated with their predicted sediment contributions.

Effluents from sewage treatment plants were represented under baseline conditions as continuous discharges, using the design flow for each facility and the monthly geometric mean fecal coliform effluent limitation of 200 counts/100 mL.

CSO outlets were represented as discreet point sources in the model. CSO flow and discharge frequency was derived from overflow data generated by the POTWs. This information was augmented with precipitation analysis and watershed modeling to develop model inputs needed to build fecal coliform loading values for a ten-year time series from which annual average fecal coliform loading values could be calculated. Under baseline conditions, Wheeling, Benwood, McMechen, and Moundsville CSO quality was represented as a concentration of 100,000 counts/100 mL to reflect baseline conditions for untreated CSO discharges.

MS4, nonpoint source and background loadings for fecal coliform were represented using drainage area, precipitation, and pollutant accumulation and wash off rates, as appropriate for each landuse.

Source Loading Alternatives

Simulating baseline conditions allowed for the evaluation of each stream's response to variations in source contributions under a variety of hydrologic conditions. This sensitivity analysis gave insight into the dominant sources and the mechanisms by which potential decreases in loads would affect instream pollutant concentrations. The loading contributions from the various existing sources were individually adjusted; the modeled instream concentrations were then evaluated.

Multiple allocation scenarios were run for the impaired waterbodies. Successful scenarios achieved the TMDL endpoints under all flow conditions throughout the modeling period. The averaging period and allowable exceedance frequency associated with West Virginia water quality criteria were considered in these assessments. In general, loads contributed by sources that had the greatest impact on instream concentrations were reduced first. If additional load reductions were required to meet the TMDL endpoints, less significant source contributions were subsequently reduced.

Figure 10-5 shows an example of model output for a baseline condition and a successful TMDL scenario.

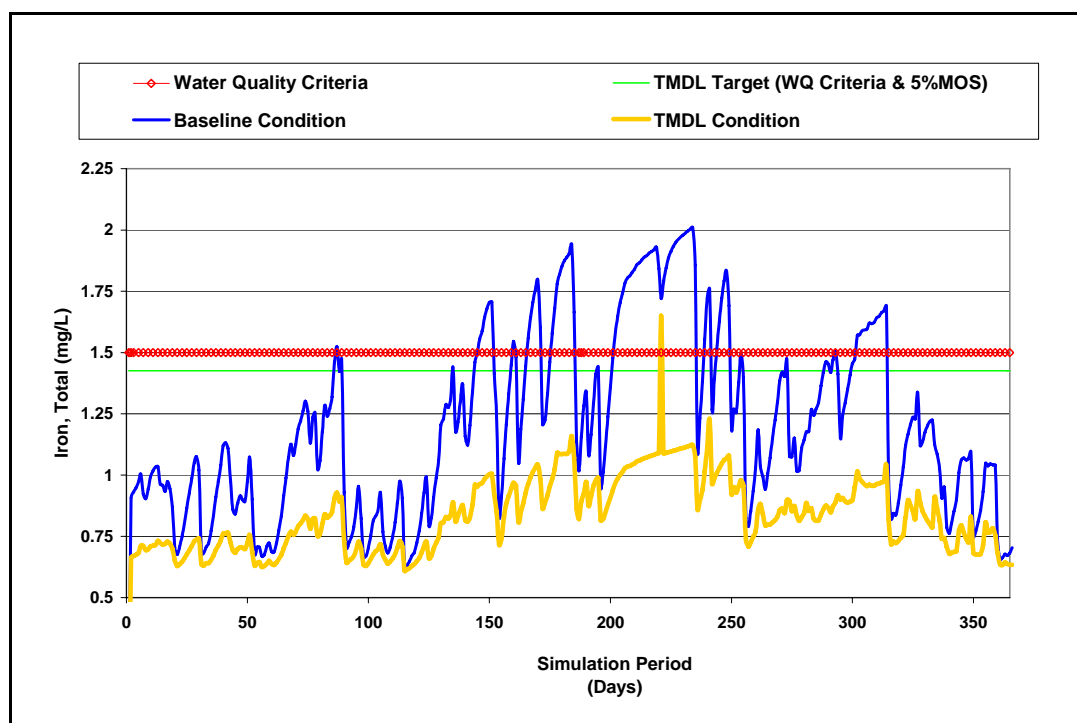


Figure 10-5. Example of baseline and TMDL conditions for total iron

10.7 TMDLs and Source Allocations

10.7.1 Total Iron TMDLs

Source allocations were developed for all modeled subwatersheds contributing to the iron impaired streams of the Upper Ohio South Watershed. A top-down methodology was followed to allocate loads to sources. Headwaters were analyzed first because their loading affects downstream water quality. Loading contributions were reduced from applicable sources in impaired headwaters until criteria were attained at the subwatershed outlet. The loading contributions of unimpaired headwaters and the reduced loadings for impaired headwaters were then routed through downstream waterbodies. Using this method, contributions from all sources were weighted equitably and ensured cumulative load endpoints were met at the most downstream subwatershed for each impaired stream. Reductions in sources affecting impaired headwaters ultimately led to improvements downstream and effectively decreased necessary loading reductions from downstream sources. Nonpoint source reductions did not result in allocated loadings less than natural conditions. Permitted source reductions did not result in allocated loadings to a permittee that would be more stringent than water quality criteria. The following methodology was used when allocating to iron sources.

- The loading from streambank erosion was first reduced to the loading characteristics of the reference stream.
- If further reduction was necessary, an analysis of the relative impact of AML, sediment-contributing MS4 and nonpoint sources, and mining point sources was performed and loads were practically reduced until water quality criteria were met. Pollutant loads from precipitation induced sources were not reduced beyond the loading associated with the forest land use and loadings from continuous discharges were not reduced beyond loadings resulting from discharge quality equal to the value of the water quality criterion.

Wasteload Allocations (WLAs)

WLAs were developed for all point sources permitted to discharge iron under a NPDES permit. Because of the established relationship between iron and TSS, iron WLAs are also provided for facilities with stormwater discharges that are regulated under NPDES permits that contain TSS and/or iron effluent limitations or benchmarks values, MS4 facilities, and facilities registered under the General NPDES permit for construction stormwater.

Active Mining Operations

WLAs are provided for all existing outlets of NPDES permits for mining activities, except those where reclamation has progressed to the point where existing limitations are based upon the Post-Mining Area provisions of Subpart E of 40 CFR 434. The WLAs for active mining operations consider the functional characteristics of the permitted outlets (i.e. precipitation driven, pumped continuous flow, gravity continuous flow, commingled) and their respective impacts at high and low flow conditions.

The federal effluent guidelines for the coal mining point source category (40 CFR 434) provide various alternative limitations for discharges caused by precipitation. Under those technology-based guidelines, effluent limitations for total iron, total manganese and TSS may be replaced

with an alternative limitation for “settleable solids” during certain magnitude precipitation events that vary by mining subcategory. The water quality-based WLAs and future growth provisions of the iron TMDLs preclude the applicability of the “alternative precipitation” iron provisions of 40 CFR 434. Also, the established relationship between iron and TSS requires continuous control of TSS concentration in permitted discharges to achieve iron WLAs. As such, the “alternative precipitation” TSS provisions of 40 CFR 434 should not be applied to point source discharges associated with the iron TMDLs.

In certain instances, prescribed WLAs may be less stringent than existing effluent limitations. However, the TMDLs are not intended to relax effluent limitations that were developed under the alternative basis of WVDEP’s implementation of the antidegradation provisions of the Water Quality Standards, which may result in more stringent allocations than those resulting from the TMDL process. Whereas TMDLs prescribe allocations that minimally achieve water quality criteria (i.e. 100 percent use of a stream’s assimilative capacity), the antidegradation provisions of the standards are designed to maintain the existing quality of high-quality waters. Antidegradation provisions may result in more stringent allocations that limit the use of remaining assimilative capacity. Also, water quality-based effluent limitations developed in the NPDES permitting process may dictate more stringent effluent limitations for discharge locations that are upstream of those considered in the TMDLs. TMDL allocations reflect pollutant loadings that are necessary to achieve water quality criteria at distinct locations (i.e., the pour points of delineated subwatersheds). In contrast, effluent limitation development in the permitting process is based on the achievement/maintenance of water quality criteria at the point of discharge.

Specific WLAs are not provided for “post-mining” outlets because programmatic reclamation was assumed to have returned disturbed areas to conditions that approach background. Barring unforeseen circumstances that alter their current status, such outlets are authorized to continue to discharge under the existing terms and conditions of their NPDES permit.

Discharges regulated by the Multi Sector Stormwater Permit

Certain registrations under the general permit for stormwater associated with industrial activity implement TSS and/or iron benchmark values. Facilities that are compliant with such limitations are not considered to be significant sources of sediment or iron. Facilities that are present in the watersheds of iron-impaired streams are assigned WLAs that allow for continued discharge under existing permit conditions.

Municipal Separate Storm Sewer System (MS4)

USEPA’s stormwater permitting regulations require municipalities to obtain permit coverage for stormwater discharges from MS4s. In the TMDL watersheds of the Upper Ohio South there are four designated MS4 entities: the City of Wheeling, the City of Bethlehem, the City of Moundsville, and the West Virginia Division of Highways (DOH). Each entity will be registered under, and subject to, the requirements of General Permit Number WV0110625. The stormwater discharges from MS4s are point sources for which the TMDLs prescribe wasteload allocations.

In the majority of the subwatersheds where MS4 entities have areas of responsibility, the urban, residential and road landuses strongly influence bank erosion. As such, portions of the baseline and allocated loads associated with bank erosion are included in the MS4 wasteload allocations.

The subdivision of the bank erosion component between point and nonpoint sources, and where applicable, between multiple MS4 entities, is proportional to their respective drainage areas within each subwatershed. Model representation of bank erosion is accomplished through consideration of a number of inputs including slope, soils, imperviousness, and the stability of existing streambanks. Bank erosion loadings are most strongly influenced by upland impervious area and bank stability. The decision to include bank erosion in the MS4 wasteload allocations results from the predominance of urban/residential/road landuses and impacts in MS4 areas. WVDEP's assumption is that management practices will be implemented under the MS4 permit to directly address impacts from bank erosion. However, even if the implementation of stormwater controls on uplands is maximized, and the volume and intensity of stormwater runoff are minimized, the existing degraded stability of streambanks may continue to accelerate erosion. The erosion of unstable streambanks is a nonpoint source of sediment that is included in the MS4 allocations. Natural attenuation of legacy impacts cannot be expected in the short term, but may be accelerated by bank stabilization projects. The inclusion of the bank erosion load component in the wasteload allocations of MS4 entities is not intended to prohibit or discourage cooperative bank stabilization projects between MS4 entities and WVDEP's Nonpoint Source Program, or to prohibit the use of Section 319 funding as a component of those projects.

Construction Stormwater

Specific WLAs for future activity under the Construction Stormwater General Permit are provided at the subwatershed scale and are described in Section 9.0. An allocation of 1.0 percent of subwatershed area was generally provided with loadings based upon precipitation and runoff and an assumption that proper installation and maintenance of required BMPs will achieve a TSS benchmark value of 100 mg/L. In one modeled subwatershed, an allowance of two percent of subwatershed area was provided to accommodate existing activity under the permit. The existing level of activity under the Construction Stormwater General Permit conforms to the subwatershed allocations. As such, specific WLAs for existing registrations under the General Permit are not presented.

Load Allocations (LAs)

LAs are made for the dominant nonpoint source categories as follows:

- AML: loading from abandoned mine lands, including loads from disturbed land, highwalls, deep mine discharges and seeps
- Sediment sources: loading associated with sediment contributions from barren land, harvested forest, oil and gas well operations, and residential/urban/road landuses and streambank erosion in non-MS4 areas
- Background and other nonpoint sources: loading from undisturbed forest and grasslands, and agricultural landuses (loadings associated with this category were represented but not reduced)

10.7.2 Dissolved Aluminum and pH TMDLs

Source allocations were developed for all modeled subwatersheds contributing to the dissolved aluminum and pH impaired streams of the Glens Run subwatershed. Sources of total iron were

reduced prior to total aluminum reduction because existing instream iron concentrations can significantly reduce pH and consequently increase dissolved aluminum concentrations. The dissolved aluminum and pH TMDL endpoints were not attained after source reductions to iron, therefore the total aluminum loading from AMLs was reduced to the extent necessary to attain the dissolved aluminum water quality criteria. The effect of the metals reduction on pH water quality was then evaluated to verify attainment of pH criteria.

Dissolved aluminum TMDLs were based on a dissolved aluminum TMDL endpoint; however, sources were represented and allocated in terms of total aluminum.

Load Allocations (LAs)

LAs are made for contributing nonpoint source categories as follows:

- AML: loading from abandoned mine lands, including loads from disturbed land, highwalls, deep mine discharges and seeps
- Sediment sources: loading associated with sediment contributions from barren land, harvested forest, oil and gas well operations, and residential/urban/road landuses (loadings associated with sources in this category were represented but not reduced)
- Background and other nonpoint sources: loading from undisturbed forest and grasslands, and agricultural landuses (loadings associated with this category were represented but not reduced)

10.7.3 Total Manganese TMDL

The top-down methodology was followed to develop the Glens Run manganese TMDL and allocate loads to sources. The only identified problematic manganese sources are AML seeps associated with abandoned mine lands and highwalls in the watershed. Reductions of those sources as prescribed in the load allocation component of the TMDL allowed the manganese water quality endpoint to be met.

10.7.4 Fecal Coliform Bacteria TMDLs

TMDLs and source allocations were developed for impaired streams and their tributaries on a subwatershed basis throughout the watershed. As described in Section 8.7.1, a top-down methodology was followed to develop these TMDLs and allocate loads to sources.

The following general methodology was used when allocating loads to fecal coliform bacteria sources:

- The effluents from all NPDES permitted sewage treatment plants were set at the permit limit (200 counts/100 mL monthly geometric mean)
- Because West Virginia Bureau for Public Health regulations prohibit the discharge of raw sewage into surface waters, all illicit discharges of human waste (from failing septic systems and straight pipes) were reduced by 100 percent in the model

- If further reduction was necessary, CSOs, MS4s, and non-point source loadings from agricultural lands and residential areas were subsequently reduced until in-stream water quality criteria were met

Wasteload Allocations (WLAs)

WLAs were developed for all facilities permitted to discharge fecal coliform bacteria, including MS4s, as described below.

Sewage Treatment Plant Effluents

The fecal coliform effluent limitations for NPDES permitted sewage treatment plants are more stringent than water quality criteria; therefore, all effluent discharges from sewage treatment facilities were given wasteload allocations equal to existing monthly fecal coliform effluent limitations of 200 counts/100 mL.

Combined Sewer Overflows

In TMDL watersheds there are a total of 70 CSO outlets associated with POTWs operated by the cities of Wheeling, Benwood, McMechen, and Moundsville. (Table 10-4). These systems have Long Term Control Plans, but currently experience frequent stormwater-related CSO discharges, and do not have systems in place to store or treat CSO discharges.

Table 10-4. Combined sewer overflows in the Upper Ohio South watershed

City	SWS	Receiving Stream	Receiving Stream Code	Permit ID	Outlet
Wheeling	301	Wheeling Creek	WV-OUS-17	WV0023230	C068
Wheeling	301	Wheeling Creek	WV-OUS-17	WV0023230	C063
Wheeling	301	Wheeling Creek	WV-OUS-17	WV0023230	C064
Wheeling	301	Wheeling Creek	WV-OUS-17	WV0023230	C065
Wheeling	302	Wheeling Creek	WV-OUS-17	WV0023230	C071
Wheeling	302	Wheeling Creek	WV-OUS-17	WV0023230	C072
Wheeling	302	Wheeling Creek	WV-OUS-17	WV0023230	C074
Wheeling	302	Wheeling Creek	WV-OUS-17	WV0023230	C075
Wheeling	302	Wheeling Creek	WV-OUS-17	WV0023230	C083
Wheeling	302	Wheeling Creek	WV-OUS-17	WV0023230	C087
Wheeling	304	Wheeling Creek	WV-OUS-17	WV0023230	C088
Wheeling	304	Wheeling Creek	WV-OUS-17	WV0023230	C089
Wheeling	304	Wheeling Creek	WV-OUS-17	WV0023230	C090
Wheeling	305	Long Run	WV-OUS-17-B	WV0023230	C163
Wheeling	305	Long Run	WV-OUS-17-B	WV0023230	C165
Wheeling	312	Wheeling Creek	WV-OUS-17	WV0023230	C091
Wheeling	312	Wheeling Creek	WV-OUS-17	WV0023230	C092
Wheeling	312	Wheeling Creek	WV-OUS-17	WV0023230	C093

City	SWS	Receiving Stream	Receiving Stream Code	Permit ID	Outlet
Wheeling	312	Wheeling Creek	WV-OUS-17	WV0023230	C095
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C167
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C098
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C099
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C100
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C101
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C102
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C103
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C106
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C107
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C108
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C109
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C110
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C111
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C112
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C113
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C114
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C116
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C117
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C118
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C121
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C122
Wheeling	314	Wheeling Creek	WV-OUS-17	WV0023230	C124
Wheeling	315	Little Wheeling Creek	WV-OUS-17-H	WV0023230	C152
Wheeling	315	Little Wheeling Creek	WV-OUS-17-H	WV0023230	C156
Wheeling	315	Little Wheeling Creek	WV-OUS-17-H	WV0023230	C157
Wheeling	315	Little Wheeling Creek	WV-OUS-17-H	WV0023230	C159
Wheeling	315	Little Wheeling Creek	WV-OUS-17-H	WV0023230	C160
Wheeling	358	Wheeling Creek	WV-OUS-17	WV0023230	C126
Wheeling	358	Wheeling Creek	WV-OUS-17	WV0023230	C127
Wheeling	358	Wheeling Creek	WV-OUS-17	WV0023230	C128
Wheeling	358	Wheeling Creek	WV-OUS-17	WV0023230	C129
Wheeling	358	Wheeling Creek	WV-OUS-17	WV0023230	C130
Wheeling	358	Wheeling Creek	WV-OUS-17	WV0023230	C131
Wheeling	358	Wheeling Creek	WV-OUS-17	WV0023230	C132

City	SWS	Receiving Stream	Receiving Stream Code	Permit ID	Outlet
Wheeling	358	Wheeling Creek	WV-OUS-17	WV0023230	C133
Wheeling	358	Wheeling Creek	WV-OUS-17	WV0023230	C134
Wheeling	451	Caldwell Run	WV-OUS-16	WV0023230	C137
Wheeling	451	Caldwell Run	WV-OUS-16	WV0023230	C139
Wheeling	451	Caldwell Run	WV-OUS-16	WV0023230	C142
Wheeling	451	Caldwell Run	WV-OUS-16	WV0023230	C136
Wheeling	452	George Run	WV-OUS-16-A	WV0023230	C141
Wheeling	453	Caldwell Run	WV-OUS-16	WV0023230	C140
Wheeling	453	Caldwell Run	WV-OUS-16	WV0023230	C148
Benwood	461	Boggs Run	WV-OUS-15	WV0020648	C004
Benwood	461	Boggs Run	WV-OUS-15	WV0020648	C016
Benwood	461	Boggs Run	WV-OUS-15	WV0020648	C017
Benwood	461	Boggs Run	WV-OUS-15	WV0020648	C018
McMechen	471	Jim Run	WV-OUS-12	WV0020141	C003
Moundsville	502	Middle Grave Creek	WV-OUS-10-C	WV0023264	C002
Moundsville	502	Middle Grave Creek	WV-OUS-10-C	WV0023264	C003
Moundsville	502	Middle Grave Creek	WV-OUS-10-C	WV0023264	C004

All fecal coliform bacteria wasteload allocations for CSO discharges have been established at 200 counts/100mL. Implementation can be accomplished by CSO elimination or by disinfection treatment and discharge in compliance with the operable, concentration-based allocations.

Municipal Separate Storm Sewer System (MS4)

USEPA's stormwater permitting regulations require municipalities to obtain permit coverage for stormwater discharges from MS4s. The cities of Wheeling, Bethlehem, and Moundsville, as well as the West Virginia Department of Transportation, Division of Highways (DOH) are designated MS4 entities in the subject watersheds. Each entity will be registered under, and subject to, the requirements of General Permit Number WV0110625. The stormwater discharges from MS4s are point sources for which the TMDLs prescribe wasteload allocations.

Load Allocations (LAs)

Fecal coliform LAs are assigned to the following source categories:

- Pasture/Cropland
- On-site Sewage Systems — loading from all illicit discharges of human waste (including failing septic systems and straight pipes)
- Residential — loading associated with urban/residential runoff from non-MS4 areas

- Background and Other Nonpoint Sources — loading associated with wildlife sources from all other landuses (contributions/loadings from wildlife sources were not reduced)

10.7.5 Chloride TMDLs

The top-down methodology described in Section 10.7.1 was followed to develop the chloride TMDLs and allocate loads to sources. Source allocations were developed for all modeled subwatersheds contributing to the chloride impaired streams in the watershed.

Wasteload Allocations (WLAs)

Chloride WLAs were developed for mining NPDES outlets. The only identified problematic chloride sources are pumped mining discharges in the watershed. The TMDL approach calculates the assimilative capacity for chloride available at the mouth of impaired streams at 7Q10 flow, and prescribes WLAs for contributing point sources that are based upon the achievement of the chronic aquatic life protection criterion in the discharge. The established wasteload allocations are equivalent to existing permit limitations after conversion in accordance with USEPA's Technical Support Document for Water Quality-based Toxics Control (USEPA, 1991). The level of control necessary to achieve criteria during low flow conditions is also protective during higher flow periods.

Load Allocations (LAs)

Chloride LAs are represented for the dominant nonpoint and background source categories. Source reduction is not prescribed for chloride LAs.

10.7.6 Seasonal Variation

Seasonal variation was considered in the formulation of the modeling analysis. Continuous simulation (modeling over a period of several years that captured precipitation extremes) inherently considers seasonal hydrologic and source loading variability. The metals, chloride and fecal coliform concentrations simulated on a daily time step by the model were compared with TMDL endpoints. Allocations that met these endpoints throughout the modeling period were developed.

10.7.7 Critical Conditions

A critical condition represents a scenario where water quality criteria are most susceptible to violation. Analysis of water quality data for the impaired streams addressed in this effort shows high pollutant concentrations during both high- and low-flow thereby precluding selection of a single critical condition. Both high-flow and low-flow periods were taken into account during TMDL development by using a long period of weather data that represented wet, dry, and average flow periods.

Nonpoint source loading is typically precipitation-driven and impacts tend to occur during wet weather and high surface runoff. During dry periods little or no land-based runoff occurs, and elevated instream pollutant levels may be due to point sources (Novotny and Olem, 1994). Also, failing on-site sewage systems and AML seeps (both categorized as nonpoint sources but represented as continuous flow discharges) often have an associated low-flow critical condition, particularly where such sources are located on small receiving waters.

Pumped, point source discharges associated with mining activity were determined to be the causative source of chloride impairments in the watershed. Because of the minimal dilution available at 7Q10, this low-flow condition was determined critical.

10.7.8 TMDL Presentation

The TMDLs for all impairments are shown in Section 9 of this report. The TMDLs for iron, aluminum, manganese, and chloride are presented as average daily loads, in pounds per day. The dissolved aluminum TMDL for Glens Run is based on a dissolved aluminum TMDL endpoint; however, components and allocations are provided in the form of total metal. The TMDLs for fecal coliform bacteria are presented in average number of colonies per day. All TMDLs were developed to meet TMDL endpoints under a range of conditions observed over the modeling period. TMDLs and their components are also presented in the allocation spreadsheets associated with this report. The filterable spreadsheets also display detailed source allocations and include multiple display formats that allow comparison of pollutant loadings among categories and facilitate implementation.

The iron and chloride WLAs for active mining operations are presented both as annual average loads, for comparison with other pollutant sources, and equivalent allocation concentrations. The prescribed concentrations are the operable allocations and are to be implemented by conversion to monthly average and daily maximum effluent limitations using USEPA's Technical Support Document for Water Quality-based Toxics Control (USEPA, 1991). The iron WLAs for Construction Stormwater General Permit registrations are presented as both annual average loads, for comparison with other sources, and equivalent area registered under the permit. The registered area is the operable allocation. The iron WLAs for non construction sectors registered under the Multi Sector Stormwater Permit are presented both as annual average loads, for comparison with other pollutant sources, and equivalent allocation concentrations. The prescribed concentrations are operable, and because they are equivalent to existing effluent limitations/benchmark values, they are to be directly implemented.

The fecal coliform bacteria WLAs for sewage treatment plant effluents and CSOs for are presented both as annual average loads, for comparison with other pollutant sources, and equivalent allocation concentrations. The prescribed concentrations are the operable allocations for NPDES permit implementation.

The WLAs for precipitation induced MS4 discharges are presented in terms of average daily loads (Fe) or average number of colonies per day (FC) and the percent pollutant reduction from baseline conditions. The "MS4 WLA Summary" tabs of the allocation spreadsheets contain the operable allocations. The "MS4 WLA Detailed" tabs on the allocation spreadsheets provide drainage areas of various land use types represented in the baseline condition (without BMPs) for each MS4 entity at the subwatershed scale. That information is intended to assist registrants under the MS4 General Permit in describing the management practices to be employed to achieve prescribed allocations.

11.0 TMDL RESULTS

Table 11-1. Dissolved Aluminum TMDLs

Major Watershed	Stream Code	Stream Name	Parameter	Load Allocation (lbs/day)	Wasteload Allocation (lbs/day)	Margin of Safety (lbs/day)	TMDL (lbs/day)
Glenns Run	WV-OUS-18	Glenns Run	Aluminum	1.0	0.04	0.1	1.1

Table 11-2. Iron TMDLs

Major Watershed	Stream Code	Stream Name	Metal	LA (lbs/day)	WLA (lbs/day)	MOS (lbs/day)	TMDL (lbs/day)
Grave Creek	WV-OUS-10	Grave Creek	Iron	381.21	20.38	21.14	422.73
Grave Creek	WV-OUS-10-AC	North Fork/Grave Creek	Iron	27.58	1.46	1.53	30.56
Grave Creek	WV-OUS-10-C	Middle Grave Creek	Iron	140.11	10.23	7.91	158.26
Grave Creek	WV-OUS-10-C-18	Whitney Run	Iron	10.31	0.50	0.57	11.38
Grave Creek	WV-OUS-10-C-18-A	UNT/Whitney Run RM 0.3	Iron	3.01	0.16	0.17	3.34
Grave Creek	WV-OUS-10-C-2	McLain Run	Iron	5.81	0.22	0.32	6.35
Grave Creek	WV-OUS-10-C-3	Toms Run	Iron	31.11	1.31	1.71	34.13
Grave Creek	WV-OUS-10-C-3-B	Leach Run	Iron	10.34	0.30	0.56	11.20
Grave Creek	WV-OUS-10-C-6	Meetinghouse Hollow	Iron	3.28	0.14	0.18	3.61
Boggs Run	WV-OUS-15	Boggs Run	Iron	20.37	300.81	16.90	338.09
Boggs Run	WV-OUS-15-A	Browns Run	Iron	5.79	4.00	0.52	10.31
Caldwell Run	WV-OUS-16	Caldwell Run	Iron	9.57	5.95	0.82	16.33
Wheeling Creek	WV-OUS-17-B	Long Run	Iron	19.45	7.08	1.40	27.92
Wheeling Creek	WV-OUS-17-B-3	Waddles Run	Iron	5.42	1.75	0.38	7.55
Wheeling Creek	WV-OUS-17-B-3-A	UNT/Waddles Run RM 1.72	Iron	0.62	0.04	0.03	0.69
Wheeling Creek	WV-OUS-17-B-8	Pogue Run	Iron	0.95	0.60	0.08	1.63

Major Watershed	Stream Code	Stream Name	Metal	LA (lbs/day)	WLA (lbs/day)	MOS lbs/day)	TMDL (lbs/day)
Wheeling Creek	WV-OUS-17-H	Little Wheeling Creek	Iron	218.72	18.55	12.49	249.76
Wheeling Creek	WV-OUS-17-H-1	Peters Run	Iron	23.46	1.22	1.30	25.97
Wheeling Creek	WV-OUS-17-H-10	Battle Run	Iron	9.47	0.29	0.51	10.27
Wheeling Creek	WV-OUS-17-H-2	Middle Wheeling Creek	Iron	94.68	10.90	5.56	111.13
Wheeling Creek	WV-OUS-17-H-2-Q	Todd Run	Iron	3.52	0.15	0.19	3.85
Wheeling Creek	WV-OUS-17-H-5	McCoy Run	Iron	2.65	NA	0.14	2.78
Wheeling Creek	WV-OUS-17-H-7	Point Run	Iron	6.60	0.42	0.37	7.39
Wheeling Creek	WV-OUS-17-H-8	Roneys Point Run	Iron	2.93	0.17	0.16	3.26
Glenns Run	WV-OUS-18	Glenns Run	Iron	6.98	0.45	0.39	7.82
Glenns Run	WV-OUS-18-A	Graeb Hollow	Iron	1.51	0.07	0.08	1.66
Glenns Run	WV-OUS-18-B	UNT/Glenns Run RM 1.25	Iron	1.36	0.05	0.07	1.48
Pierce Run	WV-OUS-24-D	Pierce Run	Iron	17.62	0.73	0.97	19.32
UNT/Buffalo Creek RM 5.18	WV-OUS-24-F	UNT/Buffalo Creek RM 5.18	Iron	0.64	0.03	0.04	0.71

Table 11-3. Manganese TMDLs

Major Watershed	Stream Code	Stream Name	Parameter	Load Allocation (lbs/day)	Wasteload Allocation (lbs/day)	Margin of Safety (lbs/day)	TMDL (lbs/day)
Glenns Run	WV-OUS-18	Glenns Run	Manganese	1.4	0.1	0.1	Glenns Run

Table 11-4. Chloride TMDLs

Stream Code	Stream Name	Pollutant	LA (lbs/day)	WLA (lbs/day)	MOS (lbs/day)	TMDL (lbs/day)
WV-OUS-21-F	North Fork/Short Creek	Chloride	744	1,425	implicit	2,169
WV-OUS-21-F-4	Huff Run	Chloride	60	1,425	implicit	1,485
WV-OUS-17-AF	UNT/Wheeling Creek RM 25.77	Chloride	39	470	implicit	509
WV-OUS-15-C	UNT/Boggs Run RM 2.69	Chloride	83	337	implicit	421

Table 11-5. pH TMDLs

Stream Code	Stream Name	Predicted TMDL pH		
		Minimum	Median	Maximum
WV-OUS-18	Glenns Run	7.04	7.65	8.49

Table 11-6. Fecal coliform bacteria TMDLs

Stream Code	Stream Name	LA (counts/day)	WLA (counts/day)	MOS (counts/day)	TMDL (counts/day)
WV-OUS-6	Fish Run	1.35E+10	1.21E+08	7.18E+08	1.44E+10
WV-OUS-6-B	UNT/Fish Run RM 0.79	4.48E+09	NA	2.36E+08	4.71E+09
WV-OUS-10	Grave Creek	3.36E+11	1.68E+10	1.85E+10	3.71E+11
WV-OUS-10-AC	North Fork/Grave Creek	3.64E+10	1.52E+07	1.92E+09	3.83E+10
WV-OUS-10-C	Middle Grave Creek	1.34E+11	1.27E+10	7.74E+09	1.55E+11
WV-OUS-10-C-11	North Fork/Middle Grave Creek	1.18E+10	NA	6.23E+08	1.25E+10
WV-OUS-10-C-18	Whitney Run	1.11E+10	NA	5.83E+08	1.17E+10
WV-OUS-10-C-18-A	UNT/Whitney Run RM 0.3	3.73E+09	NA	1.96E+08	3.92E+09
WV-OUS-10-C-3	Toms Run	3.23E+10	3.18E+06	1.70E+09	3.40E+10
WV-OUS-10-C-4	Little Toms Run	3.92E+09	NA	2.06E+08	4.12E+09
WV-OUS-10-C-7	Bartletts Run	3.41E+09	NA	1.80E+08	3.59E+09
WV-OUS-10-C-9	Wells Run	2.29E+09	NA	1.20E+08	2.41E+09
WV-OUS-10-D	UNT/Grave Creek RM 2.41	2.51E+09	NA	1.32E+08	2.64E+09
WV-OUS-10-Q	Lick Run	5.77E+09	NA	3.03E+08	6.07E+09
WV-OUS-10-R	French Run	6.54E+09	NA	3.44E+08	6.89E+09
WV-OUS-10-W	Burch Run (of Grave Creek)	7.03E+09	NA	3.70E+08	7.40E+09
WV-OUS-11-G	Molleys Hollow	3.36E+09	NA	1.77E+08	3.53E+09
WV-OUS-12	Jim Run	1.06E+10	2.51E+08	5.70E+08	1.14E+10
WV-OUS-15	Boggs Run	2.66E+10	5.95E+08	1.43E+09	2.86E+10
WV-OUS-15-A	Browns Run	6.78E+09	2.31E+08	3.69E+08	7.38E+09
WV-OUS-16	Caldwell Run	6.31E+08	1.75E+10	9.52E+08	1.90E+10
WV-OUS-16-A	George Run	0.00E+00	3.62E+09	1.91E+08	3.81E+09
WV-OUS-17	Wheeling Creek	1.17E+12	8.53E+10	6.62E+10	1.32E+12
WV-OUS-17-AF	UNT/Wheeling Creek RM 25.77	2.54E+09	5.45E+07	1.37E+08	2.74E+09
WV-OUS-17-AG	UNT/Wheeling Creek RM 26.23	5.88E+08	NA	3.10E+07	6.19E+08
WV-OUS-17-AH	UNT/Wheeling Creek RM 26.55	3.11E+09	NA	1.64E+08	3.28E+09
WV-OUS-17-AL	Enlow Fork	2.66E+11	7.58E+07	1.40E+10	2.80E+11
WV-OUS-17-B	Long Run	2.45E+10	1.53E+10	2.09E+09	4.19E+10
WV-OUS-17-B-3	Waddles Run	1.03E+10	5.27E+09	8.19E+08	1.64E+10
WV-OUS-17-B-8	Pogue Run	1.15E+09	2.38E+09	1.85E+08	3.71E+09

Stream Code	Stream Name	LA (counts/day)	WLA (counts/day)	MOS (counts/day)	TMDL (counts/day)
WV-OUS-17-H	Little Wheeling Creek	2.72E+11	5.04E+09	1.46E+10	2.91E+11
WV-OUS-17-H-1	Peters Run	3.17E+10	3.37E+08	1.69E+09	3.37E+10
WV-OUS-17-H-10	Battle Run	7.57E+09	NA	3.98E+08	7.97E+09
WV-OUS-17-H-12	McGraw Run	1.38E+10	NA	7.27E+08	1.45E+10
WV-OUS-17-H-19	UNT/Little Wheeling Creek RM 8.97	5.39E+09	1.52E+08	2.92E+08	5.84E+09
WV-OUS-17-H-2	Middle Wheeling Creek	1.52E+11	9.44E+08	8.07E+09	1.61E+11
WV-OUS-17-H-2-E	UNT/Middle Wheeling Creek RM 3.05	3.39E+09	NA	1.78E+08	3.57E+09
WV-OUS-17-H-2-F	Tanyard Run	3.60E+09	NA	1.90E+08	3.79E+09
WV-OUS-17-H-2-N	Laidley Run	1.69E+10	NA	8.87E+08	1.77E+10
WV-OUS-17-H-2-Q	Todd Run	1.01E+10	NA	5.29E+08	1.06E+10
WV-OUS-17-H-5	McCoy Run	1.87E+09	NA	9.86E+07	1.97E+09
WV-OUS-17-H-7	Point Run	5.66E+09	1.74E+08	3.07E+08	6.14E+09
WV-OUS-17-H-8	Roneys Point Run	4.96E+09	NA	2.61E+08	5.22E+09
WV-OUS-17-M	Britt Run	9.42E+09	6.84E+06	4.96E+08	9.92E+09
WV-OUS-17-P	Grandstaff Run	2.00E+10	2.36E+05	1.05E+09	2.11E+10
WV-OUS-17-P-6	Wherry Run	7.49E+09	NA	3.94E+08	7.88E+09
WV-OUS-17-T	Hollidays Run	5.57E+09	NA	2.93E+08	5.86E+09
WV-OUS-17-W	Burch Run (of Wheeling Creek)	2.27E+10	NA	1.20E+09	2.39E+10
WV-OUS-17-W-1	Big Run	8.76E+09	NA	4.61E+08	9.22E+09
WV-OUS-17-W-1-A	UNT/Big Run RM 0.26	2.46E+09	NA	1.29E+08	2.59E+09
WV-OUS-17-Z	Stull Run	2.65E+10	NA	1.39E+09	2.79E+10
WV-OUS-21	Short Creek	1.09E+11	1.49E+08	5.75E+09	1.15E+11
WV-OUS-21-A	Girty Run	9.42E+09	3.03E+07	4.97E+08	9.94E+09
WV-OUS-21-F	North Fork/Short Creek	3.66E+10	5.30E+07	1.93E+09	3.85E+10
WV-OUS-21-F-3	UNT/North Fork RM 1.32/Short Creek	1.48E+09	NA	7.80E+07	1.56E+09
WV-OUS-21-F-4	Huff Run	3.90E+09	NA	2.05E+08	4.10E+09
WV-OUS-21-F-7	UNT/North Fork RM 2.55/Short Creek	2.70E+09	NA	1.42E+08	2.84E+09
WV-OUS-21-F-8	UNT/North Fork RM 2.77/Short Creek	3.06E+09	5.30E+07	1.64E+08	3.27E+09
WV-OUS-21-F-9	Weidman Run	6.27E+09	NA	3.30E+08	6.60E+09
WV-OUS-22	UNT/Ohio River MP 79.4	2.84E+09	4.55E+07	1.52E+08	3.04E+09
WV-OUS-24-D	Pierce Run	2.20E+10	1.30E+08	1.17E+09	2.33E+10
WV-OUS-24-D-6	UNT/Pierce Run RM 2.67	4.55E+09	1.28E+08	2.46E+08	4.92E+09
WV-OUS-24-H	Mingo Run	1.58E+10	NA	8.29E+08	1.66E+10
WV-OUS-24-O	Castleman Run	7.39E+10	7.58E+07	3.89E+09	7.79E+10

Stream Code	Stream Name	LA (counts/day)	WLA (counts/day)	MOS (counts/day)	TMDL (counts/day)
WV-OUS-24-O-13	Rices Run	1.87E+10	NA	9.84E+08	1.97E+10
WV-OUS-24-O-3	Longs Run	2.11E+10	NA	1.11E+09	2.22E+10

NA = not applicable; UNT = unnamed tributary.

“Scientific notation” is a method of writing or displaying numbers in terms of a decimal number between 1 and 10 multiplied by a power of 10. The scientific notation of 10,492, for example, is 1.0492×10^4 .

Table 11-7. Biological TMDLs

Stream (NHD_Code)	Biological Stressor	Parameter	LA	WLA	MOS	TMDL	Units
Grave Creek (WV-OUS-10)	Sedimentation	Total iron	379.97	20.38	21.07	421.43	(lbs/day)
	Organic Enrichment	Fecal coliform	3.36E+11	1.68E+10	1.85E+10	3.71E+11	(counts/day)
Middle Grave Creek (WV-OUS-10-C)	Organic Enrichment	Fecal coliform	1.34E+11	1.27E+10	7.74E+09	1.55E+11	(counts/day)
	Sedimentation	Total iron	138.87	10.23	7.85	156.95	(lbs/day)
Whitney Run (WV-OUS-10-C-18)	Organic Enrichment	Fecal coliform	1.11E+10	NA	5.83E+08	1.17E+10	(counts/day)
North Fork/Grave Creek (WV-OUS-10-AC)	Organic Enrichment	Fecal coliform	3.64E+10	1.52E+07	1.92E+09	3.83E+10	(counts/day)
	Sedimentation	Total iron	27.58	1.46	1.53	30.56	(lbs/day)
Jim Run (WV-OUS-12)	Organic Enrichment	Fecal coliform	1.06E+10	2.51E+08	5.70E+08	1.14E+10	(counts/day)
Caldwell Run (WV-OUS-16)	Organic Enrichment	Fecal coliform	6.31E+08	1.75E+10	9.52E+08	1.90E+10	(counts/day)
	Sedimentation	Total iron	9.57	5.95	0.82	16.33	(lbs/day)

Stream (NHD_Code)	Biological Stressor	Parameter	LA	WLA	MOS	TMDL	Units
Long Run (WV-OUS-17-B)	Organic Enrichment	Fecal coliform	2.45E+10	1.53E+10	2.09E+09	4.19E+10	(counts/day)
	Sedimentation	Total iron	19.45	7.08	1.4	27.92	(lbs/day)
Waddles Run (WV-OUS-17-B-3)	Organic Enrichment	Fecal coliform	1.03E+10	5.27E+09	8.19E+08	1.64E+10	(counts/day)
	Sedimentation	Total iron	5.42	1.75	0.38	7.55	(lbs/day)
Pogue Run (WV-OUS-17-B-8)	Organic Enrichment	Fecal coliform	1.15E+09	2.38E+09	1.85E+08	3.71E+09	(counts/day)
	Sedimentation	Total iron	0.95	0.6	0.08	1.63	(lbs/day)
Peters Run (WV-OUS-17-H-1)	Organic Enrichment	Fecal coliform	3.17E+10	3.37E+08	1.69E+09	3.37E+10	(counts/day)
	Sedimentation	Total iron	23.46	1.22	1.3	25.97	(lbs/day)
Todd Run (WV-OUS-17-H-2-Q)	Organic Enrichment	Fecal coliform	1.01E+10	NA	5.29E+08	1.06E+10	(counts/day)
	Sedimentation	Total iron	3.52	0.15	0.19	3.85	(lbs/day)
Point Run (WV-OUS-17-H-7)	Organic Enrichment	Fecal coliform	5.66E+09	1.74E+08	3.07E+08	6.14E+09	(counts/day)
	Sedimentation	Total iron	6.6	0.42	0.37	7.39	(lbs/day)
Roneys Point Run (WV-OUS-17-H-8)	Organic Enrichment	Fecal coliform	4.96E+09	NA	2.61E+08	5.22E+09	(counts/day)
	Sedimentation	Total iron	2.93	0.17	0.16	3.26	(lbs/day)
Glenns Run (WV-OUS-18)	Metal toxicity	Aluminum	1.0	0.04	0.1	1.1	(lbs/day)
	Metal flocculation	Total iron	6.98	0.45	0.39	7.82	(lbs/day)
	pH toxicity (acidity)	pH	Minimum	Median	Maximum		Standard Units
			7.04	7.65	8.49		

Stream (NHD_Code)	Biological Stressor	Parameter	LA	WLA	MOS	TMDL	Units
UNT/North Fork RM 1.32/Short Creek (WV-OUS-21-F-3)	Organic Enrichment	Fecal coliform	1.48E+09	NA	7.80E+07	1.56E+09	(counts/day)
Weidman Run (WV-OUS-21-F-9)	Organic Enrichment	Fecal coliform	6.27E+09	NA	3.30E+08	6.60E+09	(counts/day)
Pierce Run (WV-OUS-24-D)	Organic Enrichment	Fecal coliform	2.20E+10	1.30E+08	1.17E+09	2.33E+10	(counts/day)
Castleman Run (WV-OUS-24-O)	Organic Enrichment	Fecal coliform	7.39E+10	7.58E+07	3.89E+09	7.79E+10	(counts/day)

NA = not applicable; UNT = unnamed tributary.

“Scientific notation” is a method of writing or displaying numbers in terms of a decimal number between 1 and 10 multiplied by a power of 10. The scientific notation of 10,492, for example, is 1.0492×10^4 .

12.0 FUTURE GROWTH

12.1 Iron, Aluminum and Manganese

With the exception of allowances provided for Construction Stormwater General Permit registrations discussed below, this TMDL does not include specific future growth allocations for iron, aluminum or manganese. However, the absence of specific future growth allocations does not prohibit the permitting of new or expanded activities in the watersheds of streams for which metals TMDLs have been developed. Pursuant to 40 CFR 122.44(d)(1)(vii)(B), effluent limits must be “consistent with the assumptions and requirements of any available wasteload allocation for the discharge....” In addition, the federal regulations generally prohibit issuance of a permit to a new discharger “if the discharge from its construction or operation will cause or contribute to the violation of water quality standards.” A discharge permit for a new discharger could be issued under the following scenarios:

- A new facility could be permitted anywhere in the watershed, provided that effluent limitations are based on the achievement of water quality standards at end-of-pipe for the pollutants of concern in the TMDL.
- NPDES permitting rules mandate effluent limitations for metals to be prescribed in the total recoverable form. West Virginia water quality criteria for iron are in total recoverable form and may be directly implemented. Because aluminum water quality criteria are in dissolved form, a dissolved/total pollutant translator is needed to determine effluent limitations. A new facility could be permitted in the Glens Run watershed if total aluminum effluent limitations are based on the dissolved aluminum, acute, aquatic life protection criterion and a dissolved/total aluminum translator equal to 1.0.
- As described previously, the alternative precipitation provisions of 40 CFR 434 that suspend applicability of TSS limitations cannot be applied to new discharges in iron TMDL watersheds.
- Remining (under an NPDES permit) could occur without a specific allocation to the new permittee, provided that the requirements of existing State remining regulations are met. Remining activities will not worsen water quality and in some instances may result in improved water quality in abandoned mining areas.
- Reclamation and release of existing permits could provide an opportunity for future growth provided that permit release is conditioned on achieving discharge quality better than the WLA prescribed by the TMDL.
- Most traditional, non-mining point source discharges are assigned technology-based TSS effluent limitations that would not cause biological impairment. For example, NPDES permits for sewage treatment and industrial manufacturing facilities contain monthly average TSS effluent limitations between 30 and 100 mg/L. New point sources may be permitted in the watersheds of biologically impaired streams for which sedimentation has

been identified as a significant stressor with the implementation of applicable technology based TSS requirements. If iron, aluminum or manganese is identified as a pollutant of concern in a process wastewater discharge from a new, non-mining activity, then the discharge can be permitted if effluent limitations are based on the achievement of water quality standards at end-of-pipe for the pollutants of concern.

- Subwatershed-specific future growth allowances have been provided for site registrations under the Construction Stormwater General Permit. In general, the successful TMDL allocation provides 1.0 percent of modeled subwatershed area to be registered under the general permit at any point in time. Furthermore, the iron allocation spreadsheet provides a cumulative area allowance for the immediate subwatershed and all upstream contributing subwatersheds. Projects in excess of the acreage provided for the immediate subwatershed may also be registered under the general permit, provided that the total registered disturbed area in the immediate subwatershed and all upstream subwatersheds is less than the cumulative area provided. Furthermore, larger projects may be permitted in phases that adhere to the area allowances or by implementing controls beyond those afforded by the general permit. Larger areas may be permitted if it can be demonstrated that more stringent controls will result in a loading condition commensurate with that afforded by the management practices associated with the general permit.

12.2 Fecal Coliform Bacteria

Specific fecal coliform bacteria future growth allocations are not prescribed. The absence of specific future growth allocations does not prohibit new development in the watersheds of streams for which fecal coliform bacteria TMDLs have been developed, or preclude the permitting of new sewage treatment facilities.

In many cases, the implementation of the TMDLs will consist of providing public sewer service to unsewered areas. The NPDES permitting procedures for sewage treatment facilities include technology-based fecal coliform effluent limitations that are more stringent than applicable water quality criteria. Therefore, a new sewage treatment facility may be permitted anywhere in the watershed, provided that the permit includes monthly geometric mean and maximum daily fecal coliform limitations of 200 counts/100 mL and 400 counts/100 mL, respectively. Furthermore, WVDEP will not authorize construction of combined collection systems nor permit overflows from newly constructed collection systems.

12.3 Chloride

Specific chloride future growth allocations are not prescribed. The absence of specific future growth allocations does not prohibit new discharges in the watersheds of streams for which chloride TMDLs have been developed. A new discharge may be permitted anywhere in the watershed, provided that effluent limitations are based on the achievement of chloride water quality standards at end-of-pipe.

13.0 PUBLIC PARTICIPATION

13.1 Public Meetings

Informational public meetings were held on May 23, 2005 at Wheeling Park High School and on August 27, 2008 at the Wheeling Cabela's Store. The May 23, 2005 meeting occurred prior to pre-TMDL stream monitoring and pollutant source tracking and included a general TMDL overview and a presentation of planned monitoring and data gathering activities. The August 27, 2008 meeting occurred prior to allocation of pollutant loads and included a presentation of planned allocation strategies. A public meeting was held to present the draft TMDLs on March 11, 2009 at the Wheeling Cabela's Store. The meeting began at 6:30 PM. and provided information to stakeholders intended to facilitate comments on the draft TMDLs.

13.2 Public Notice and Public Comment Period

The availability of draft TMDLs was advertised in various local newspapers between February 20 and February 25, 2009. Interested parties were invited to submit comments during the public comment period, which began on March 2, 2009 and ended on April 3, 2009. The electronic documents were also posted on the WVDEP's internet site at <http://www.wvdep.org/wvtmdl>

13.3 Response Summary

The West Virginia Department of Environmental Protection (WVDEP) is pleased to provide this response to public comments received on the draft TMDLs. Comments were provided by the Appalachian Center for the Economy & the Environment, on behalf of the Sierra Club and the West Virginia Rivers Coalition. The WVDEP appreciates the efforts put forth to improve the West Virginia TMDL development process.

The commenter expressed dissatisfaction with the decision to defer TMDL development for biologically impaired streams for which high ionic strength was identified as a significant stressor. The commenter contended, pursuant to 40 CFR 130.7(c)(1)(ii), that WVDEP's failure to establish TMDLs for all impairments requires USEPA's disapproval of the other TMDLs associated with the Upper Ohio River South Watershed TMDL project. Further, WVDEP's basis for deferral (insufficient available information regarding the causative pollutants and their associated impairment thresholds) was disputed. The commenter suggested that sufficient information exists to develop the biological impairment TMDLs using a conductivity endpoint of 500 $\mu\text{S}/\text{cm}$ or a total dissolved solids endpoint determined through a reference reach approach. The commenter also advocated the "phased" TMDL approach described in USEPA guidance as a mechanism to mitigate scientific uncertainty. The commenter also suggested that WVDEP use GLIMPSS (Genus Level Index of Most Probable Stream Status) to establish end points in the TMDLs for ionic stress.

WVDEP does not interpret 40 CFR 130.7 as requiring simultaneous TMDL development for all impairments of a waterbody. Delayed development of biological impairment TMDLs for the subject streams does not invalidate any other TMDLs presented for total iron, chloride and/or

fecal coliform. The biological impairments will remain on the West Virginia Section 303(d) List until such time that the biological impairment TMDLs are developed and approved by USEPA.

USEPA guidance provides 8 to 13 years from the initial listing date as a reasonable timeframe for States to develop TMDLs. The original year of listing of the biological impairments of the subject streams range from 2002 through 2008 and there is ample time remaining for the State to develop the TMDLs. None of the streams for which biological impairment TMDLs are being deferred are subject to the TMDL development requirements of the consent decree in *Ohio Valley Environmental Coalition v. Browner*.

The above notwithstanding, WVDEP's TMDL development program has historically attempted to comprehensively address all streams and all impairments in a particular watershed simultaneously. The 48-month TMDL development process includes an extensive data generating and gathering effort and is intended to produce scientifically valid TMDLs. The WVDEP approach affords efficiencies to TMDL development and provides a comprehensive basis for the restoration of designated uses. Generally, the program has not accomplished comprehensive watershed TMDL development only when it has been constrained by resources or technical uncertainty.

The biologically impaired streams with ionic stressors pose several TMDL development challenges at this time. The most concentrated ions observed in available water quality monitoring data are chlorides and sulfates, and those pollutants are the suspected contributors to the biological impairments. Some of the subject waters have elevated concentrations of both pollutants. For those waters, WVDEP developed chloride TMDLs based upon the existing numeric chloride water quality criteria. Although the reduction of chloride concentrations as prescribed by those TMDLs should positively impact stream biology, WVDEP could not conclude that the attainment of the chloride water quality criterion alone would resolve the biological impairments.

Other subject waters have elevated sulfates concentrations in the absence of chlorides. The agency is concerned that conflicting conclusions regarding appropriate sulfate thresholds may be reached when considering available information from laboratory toxicity tests versus the empirical biological and water quality data. The inconsistency most likely results from the higher pollution tolerance of organisms used in standardized toxicity tests as compared to the organisms/communities evaluated by the WVSCI. Although USEPA has not proposed national, aquatic life use, water quality criteria for sulfate, they have recently commissioned a study of sulfate toxicity to mayflies by David Buchwalter, Ph.D. with North Carolina State University. WVDEP needs and anticipates USEPA assistance and guidance in the determination of an appropriate toxic threshold for sulfate.

Although WVDEP would prefer to develop TMDLs that are based upon the toxic effect of a causative pollutant, the potential viability of developing TMDLs using a cumulative measure of ionic strength (specific conductance/total dissolved solids) is recognized. The water quality data gaps and scientific uncertainties discussed below are of concern.

In the subject watersheds, WVDEP lacks the water quality and source data necessary to use total dissolved solids in a reference reach approach. As we move forward, our pre-TMDL monitoring

efforts are being expanded to address this shortfall. The recently announced plan for the Monongahela River Watershed includes comprehensive monitoring of Total Dissolved Solids and constituent ions throughout the watershed. Specific conductance stream monitoring data is available in the watersheds of the subject streams, but source data is incomplete.

WVDEP is concerned that the ionic strength and constituent make-up of the background and the various point and nonpoint sources existing in the watershed may have dissimilar toxic impacts to the benthic community. The normalization that would be associated with TMDLs based upon total dissolved solids or specific conductance may incorrectly target pollutant reductions from non-problematic sources. Additionally, the synergistic and/or antagonistic effect of mixing multiple ions is not well understood.

Ionic stress and biological integrity issues are receiving increased attention of late, on multiple fronts. USEPA Region III has intervened in permitting activities based upon concerns of ionic stress to benthic macroinvertebrate communities. As mentioned earlier, USEPA is studying sulfate toxicity to mayflies. The State of Pennsylvania intends to propose new total dissolved solids effluent standards and water quality criteria to protect aquatic life designated uses and WVDEP is considering West Virginia water quality standard revisions regarding total dissolved solids. As those processes may provide more concrete TMDL endpoints for ionic stress biological impairment than currently available, WVDEP believes it prudent to delay TMDL development (as afforded by USEPA guidance) to allow their consideration.

WVDEP recognizes that the deferral of TMDLs cannot be indefinite. WVDEP and USEPA Region 3 intend to cooperate in the development of a plan that details state and federal activities that will be pursued to ensure the timely development of the deferred TMDLs. This plan will address not only the recent deferrals, but also those in the Upper Kanawha, Coal and Gauley River watersheds. WVDEP will consider all viable methodologies to develop the TMDLs, including but not limited to those proposed by the commenter.

The commenter also suggested the use of GLIMPSS in establishing TMDL endpoints. As evidenced by approved Section 303(d) lists from 2002 through 2008, WVDEP's established procedure to implement the narrative criterion of Section 3.2.i of 47CSR2 is the West Virginia Stream Condition Index (WVSCI). WVDEP and USEPA Region III collaborated in the development of GLIMPSS as an improvement to WVSCI with the goal of establishing a more refined tool that is calibrated by ecoregion and season. While the new index has yet to be formally implemented by WVDEP for 303(d) listing purposes, the genus level taxonomic information obtained in our benthic collections is already an integral component of our stressor identification process.

14.0 REASONABLE ASSURANCE

Reasonable assurance for maintenance and improvement of water quality in the affected watershed rests primarily with two programs. The NPDES permitting program is implemented by WVDEP to control point source discharges. The West Virginia Watershed Network is a cooperative nonpoint source control effort involving many state and federal agencies, whose task is protection and/or restoration of water quality.

14.1 NPDES Permitting

WVDEP's Division of Water and Waste Management (DWWM) is responsible for issuing non-mining NPDES permits within the State. WVDEP's Division of Mining and Reclamation (DMR) develops NPDES permits for mining activities. As part of the permit review process, permit writers have the responsibility to incorporate the required TMDL WLAs into new or reissued permits. New facilities will be permitted in accordance with future growth provisions described in Section 12.

Both the permitting and TMDL development processes have been synchronized with the Watershed Management Framework cycle, such that TMDLs are completed just before the permit expiration/reissuance time frames. Permits for existing nonmining facilities in the Upper Ohio South watershed will be reissued beginning in July 2009 and the reissuance of mining permits will begin January 1, 2010.

In regard to chloride TMDLs, the causative sources of impairment are NPDES permitted facilities that are not achieving currently prescribed effluent limitations. TMDL implementation shall be pursuit of regulatory actions necessary to compel compliance by WVDEP.

The MS4 permitting program is being implemented to address stormwater impacts from urbanized areas. West Virginia has developed a General NPDES Permit for MS4 discharges (WV0110625). The cities of Wheeling, Bethlehem, and Moundsville, and the West Virginia Department of Transportation, Division of Highways (DOH) are registered under the permit. The permit is based upon national guidance and is non-traditional in that it does not contain numeric effluent limitations, but instead proposes Best Management Practices that must be implemented. The MS4 permit is being reissued and in their application for registration under the reissued permit, MS4 entities must specifically describe management practices intended for implementation that will achieve the wasteload allocations prescribed in applicable TMDLs. A mechanism to assess the effectiveness of the BMPs in achieving the wasteload allocations must also be provided. The TMDLs are not intended to mandate imposition of numerical effluent limitations and/or discharge monitoring requirements for MS4s. Reasonable alternative methodologies may be employed for targeting and assessing BMP effectiveness in relation to prescribed wasteload allocations. The "MS4 WLA Detailed" tabs on the allocation spreadsheets wasteload allocations provide drainage areas of various land use types represented in the baseline condition (without BMPs) for each MS4 entity at the subwatershed scale. Through consideration of anticipated removal efficiencies of selected BMPs and their areas of application, it is anticipated that this information will allow MS4 permittees to make meaningful predictions of performance under the permit.

DWWM also implements a program to control discharges from CSOs. Specified fecal coliform wasteload allocations for CSOs will be implemented in accordance with the provisions of the national Combined Sewer Overflow Control Policy and the state Combined Sewer Overflow Strategy. Those programs recognize that comprehensive CSO control may require significant resources and an extended period of time to accomplish. The wasteload allocations prescribed for CSOs are necessary to achieve current fecal coliform water quality criteria. However, the TMDL should not be construed to supersede the prioritization and scheduling of CSO controls and actions pursuant to the national CSO program. Nor are the TMDLs intended to prohibit the

pursuit of the water quality standard revisions envisioned in the national policy. TMDLs may be modified to properly implement future water quality standard revisions (designated use and/or criteria), if enacted and approved by USEPA.

14.2 Watershed Management Framework Process

The Watershed Management Framework is a tool used to identify priority watersheds and coordinate efforts of state and federal agencies with the goal of developing and implementing watershed management strategies through a cooperative, long-range planning effort.

The West Virginia Watershed Network is an informal association of state and federal agencies, and nonprofit organizations interested in the watershed movement in West Virginia. Membership is voluntary and everyone is invited participate. The Network uses the Framework to coordinate existing programs, local watershed associations, and limited resources. This coordination leads to the development of Watershed Based Plans to implement TMDLs and document environmental results.

The principal area of focus of watershed management through the Framework process is correcting problems related to nonpoint source pollution. Network partners have placed a greater emphasis on identification and correction of nonpoint source pollution. The combined resources of the partners are used to address all different types of nonpoint source pollution through both public education and on-the-ground projects.

Among other things, the Framework includes a management schedule for integration and implementation of TMDLs. In 2000, the schedule for TMDL development under Section 303(d) was merged with the Framework process. The Framework identifies a six-step process for developing integrated management strategies and action plans for achieving the state's water quality goals. Step 3 of that process includes "identifying point source and/or nonpoint source management strategies - or Total Maximum Daily Loads - predicted to best meet the needed [pollutant] reduction." Following development of the TMDL, Steps 5 and 6 provide for preparation, finalization, and implementation of a Watershed Based Plan to improve water quality.

Each year, the Framework is included on the agenda of the Network to evaluate the restoration potential of watersheds within a certain Hydrologic Group. This evaluation includes a review of TMDL recommendations for the watersheds under consideration. Development of Watershed Based Plans is based on the efforts of local project teams. These teams are composed of Network members and stakeholders having interest in or residing in the watershed. Team formation is based on the type of impairment(s) occurring or protection(s) needed within the watershed. In addition, teams have the ability to use the TMDL recommendations to help plan future activities. Additional information regarding upcoming Network activities can be obtained from the acting Northern Nonpoint Source Program Basin Coordinator, Jennifer Pauer (Jennifer.Pauer@wv.gov)

The Little Grave Creek Watershed Association is the only active watershed association in the Upper Ohio South watershed. For additional information concerning the association, contact the above mentioned Basin Coordinator.

14.3 Public Sewer Projects

Within WVDEP DWWM, the Engineering and Permitting Branch's Engineering Section is charged with the responsibility of evaluating sewer projects and providing funding, where available, for those projects. All municipal wastewater loans issued through the State Revolving Fund (SRF) program are subject to a detailed engineering review of the engineering report, design report, construction plans, specifications, and bidding documents. The staff performs periodic on-site inspections during construction to ascertain the progress of the project and compliance with the plans and specifications. Where the community does not use SRF funds to undertake a project, the staff still performs engineering reviews for the agency on all POTWs prior to permit issuance or modification. For further information on upcoming projects, a list of funded and pending water and wastewater projects in West Virginia can be found at <http://www.wvinfrastructure.com/projects/index.html>.

14.4 AML Projects

Within WVDEP, the Office of Abandoned Mine Lands and Reclamation (AML&R) manages the reclamation of lands and waters affected by mining prior to the passage of the Surface Mining Control and Reclamation Act (SMCRA) in 1977. Title IV of the act addresses adverse impacts associated with abandoned mine lands. Funding for reclamation activities is derived from fees placed on coal mined which are placed in a fund and annually distributed to state and tribal agencies.

Various abandoned mine land reclamation activities are addressed by the program as necessary to protect public health, safety, and property from past coal mining and to enhance the environment through the reclamation and restoration of land and water resources. Portions of the annual grant are also used to repair or replace drinking water supplies that were substantially damaged by pre-SMCRA coal mining and to administer the program.

In December 2006, Congress passed legislation amending SMCRA and the Title IV program and in November 2008, the Office of Surface Mining finalized rules to implement the amendments. After an initial ramp-up period, AML&R will realize significant increases in its annual reclamation funding and the flexibility to direct a larger portion of those funds to address water resource impacts from abandoned mine drainage (AMD).

Title IV now contains a "30% AMD set-aside" provision that allows a state to use up to 30% of its annual grant to address AMD problems. In determining the amount of money to set-aside, AML&R must balance its multiple areas of responsibility under the program and ensure that funding is available for perpetual operation and maintenance of treatment facilities. In regard to water resource impacts, project prioritization will consider treatment practicability and sustainability and will be accomplished under a methodology that provides for the efficient application of funds to maximize restoration of fisheries across AML impacted areas of the State.

15.0 MONITORING PLAN

The following monitoring activities are recommended:

15.1 NPDES Compliance

WVDEP's DWWM and DMR have the responsibility to ensure that NPDES permits contain effluent limitations as prescribed by the TMDL WLAs and to assess and compel compliance. Permits will contain self-monitoring and reporting requirements that are periodically reviewed by WVDEP. WVDEP also inspects treatment facilities and independently monitors NPDES discharges. The combination of these efforts will ensure implementation of the TMDL WLAs.

15.2 Nonpoint Source Project Monitoring

All nonpoint source restoration projects should include a monitoring component specifically designed to document resultant local improvements in water quality. These data may also be used to predict expected pollutant reductions from similar future projects.

15.3 TMDL Effectiveness Monitoring

TMDL effectiveness monitoring should be performed to document water quality improvements after significant implementation activity has occurred where little change in water quality would otherwise be expected. Full TMDL implementation will take significant time and resources, particularly with respect to the abatement of nonpoint source impacts. WVDEP will continue monitoring on the rotating basin cycle and will include a specific TMDL effectiveness component in waters where significant TMDL implementation has occurred.

16.0 REFERENCES

- Atkins, John T. Jr., Jeffery B. Wiley, Katherine S. Paybins. 2005. *Calibration Parameters Used to Simulate Streamflow from Application of the Hydrologic Simulation Program-FORTRAN Model (HSPF) to Mountainous Basins Containing Coal Mines in West Virginia*. Scientific Investigations Report 2005-5099. U.S. Department of the Interior, U.S. Geological Survey.
- Cormier, S., G. Sutter, and S.B. Norton. 2000. *Stressor Identification: Technical Guidance Document*. USEPA-822B-00-25. U.S. Environmental Protection Agency, Office of Water and Office of Research and Development, Washington, DC.
- Gerritsen, J., J. Burton, and M.T. Barbour. 2000. *A Stream Condition Index for West Virginia Wadeable Streams*. Tetra Tech, Inc., Owings Mills, MD.
- Novotny, V., and H. Olem. 1994. *Water Quality: Prevention, Identification, and Management of Diffuse Pollution*. Van Nostrand Reinhold, New York, NY.
- PADEP (Pennsylvania Department of Environmental Protection). 2000. *Coal Mine Drainage Prediction and Pollution Prevention in Pennsylvania*. Pennsylvania Department of Environmental Protection, Harrisburg, PA.
- Scientific notation. Dictionary.com. *The American Heritage® Dictionary of the English Language, Fourth Edition*. Houghton Mifflin Company, 2004.
[http://dictionary.reference.com/browse/scientific notation](http://dictionary.reference.com/browse/scientific%20notation) (accessed: May 22, 2007).
- USEPA (U.S. Environmental Protection Agency). 1991. *Technical Support Document for Water Quality-based Toxics Control*. USEPA/505/2-90-001. U.S. Environmental Protection Agency, Office of Water, Washington, DC.